

# VIKING

SECURITY & COMMUNICATION



2025





# Thank You!

We're so grateful to have you as part of the Viking family. For over 55 years, we've been dedicated to making tough, reliable, and innovative products right here in the USA, and it's all possible because of customers like **YOU**.

Our team is here to make sure your experience with Viking is as smooth and easy as possible. From our engineers to our support team, we're all about helping you find the right solutions and keeping things running flawlessly.

**THANK YOU** for choosing Viking Electronics. We're excited to keep supporting you with products and service you can count on.

**We look forward to working with you in 2025!**

## Online Spare Parts Store

We are making it easier for you! Replaceable parts for our products can be purchased securely through our online Spare Parts Store: <https://store.vikingelectronics.com/>

Call us with questions or to order over the phone: 715-386-8666

SCAN TO VISIT THE SPARE PARTS STORE >>



## Download the Viking App

Available for download now on:



LOOK FOR THIS ICON




## Comprehensive Website

We are continually updating information, adding new products, and expanding features on the Viking website. Some of what you'll find online:

- Customer friendly navigation
- Loads of product information
- Find a distributor
- Create a pick list
- Browse support forums
- Download product manuals
- Browse products by category
- Download software and firmware
- Download custom tones/sounds
- Find warranty information
- Submit a support ticket
- Get contact info
- Browse videos
- Download catalogs
- News blog
- Request a catalog
- Ask a specific question
- Buy spare parts
- Event calendar

... AND MORE!

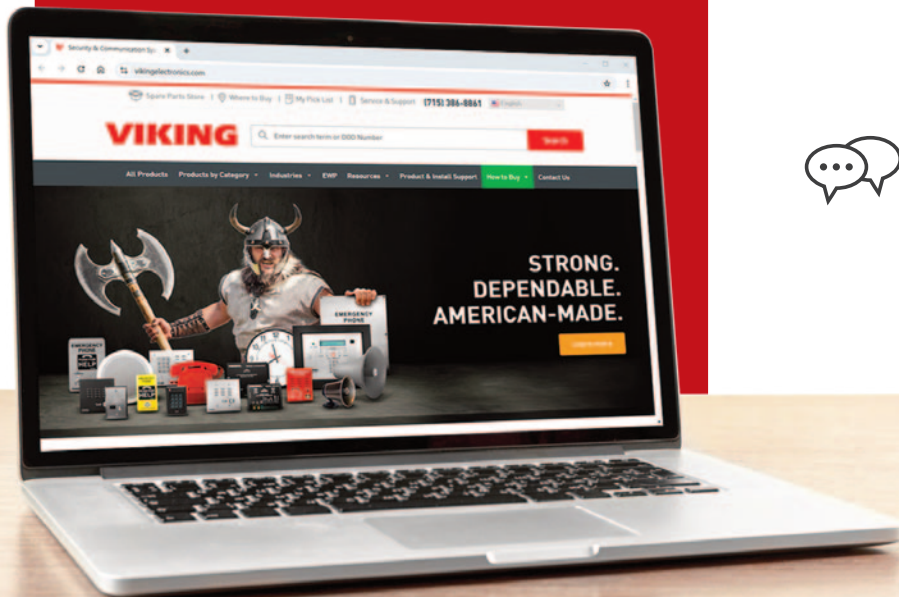

## TWO-YEAR WARRANTY

We know you choose Viking because nothing gets the job done better. Looking for another reason? Our **Two-Year Limited Warranty**. We stand behind our products because we put the customer first.

Learn more about the Viking warranty here: [vikingelectronics.com/warranty-information/](https://vikingelectronics.com/warranty-information/)



## FREE AMERICAN PRODUCT SUPPORT

When you need **Product Support**, we won't outsource your call. We're right here in Hudson, Wisconsin and you'll talk directly with one of our many experienced in-house tech gurus. Available to those servicing or installing a Viking product. Product Support resources offered:

- >> Online Support Forum
- >> Personalized Support Tickets
- >> Call to talk with a Technician directly

Learn more about Viking Product Support: [vikingelectronics.com/product-support/](https://vikingelectronics.com/product-support/)



## STAY CONNECTED

>> Follow us on your favorite social media:



>> Watch new product launches, demos, training videos, and more on YouTube: [youtube.com/c/VikingElectronicsWI/](https://youtube.com/c/VikingElectronicsWI/)



## GET THE LATEST NEWS

- >> We don't like spam!
- >> Get the latest Viking news and info delivered to your inbox once a month!



## HOW TO CONTACT US

Call: 715.386.8861  
 Fax: 715.386.4344  
[info@vikingelectronics.com](mailto:info@vikingelectronics.com)  
[www.VikingElectronics.com](http://www.VikingElectronics.com)

# PRODUCT INDEX by Model Number

Model	Page
22TB-IP	19
25AE	22
25AE-70V	22
300AE	22
300-IP	19
300-IP-EWP	19
300TB-IP	19
300TB-IP-EWP	19
30AE	22
30AE-70V	22
35AE	22
40AE	22
40-IP	18
40TB-IP	19
AES-2000F	40
AES-2000S	40
AES-2005F	40
AES-2005S	40
AIB-1	23
ARS-DLB100	13
ARS-DRB100	13
ARS-IB100	13
ARS-TB100	13
BLK-4	30
BLK-4-EWP	30
C-1000B	35
C-200	42
C-2000B	42
C-250	42
C-3000	39
C-4000	39
C-500	42
CL-A12	24
CL-A16	24
CL-D2	24
CL-D4	24
CL-DMA12	24
CL-DMA16	24
CL-DMD2	24
CL-DMD4	24
CL-RFT	24
CL-SMD2	24
CL-SMD4	24
CL-WGA16	24
CL-WGD4	24
CPC-1	25
CPC-4	25
CTG-1A	23
CTG-2A	24
D10	39
D22	39
D32	39

Model	Page
D44	39
D56	39
D6	39
DB40-BN	26
DB40-WH	26
DLE-200B	29
DLE-300	29
DNA-510	23
DVA-2WA	28
E-10A	43
E-10A-EWP	43
E-10-IP	44
E-10-IP-EWP	44
E-10-WHA	43
E-10-WHA-EWP	43
E-1600-02A	9
E-1600-02A-EWP	9
E-1600-02-IP	9
E-1600-02-IPEWP	9
E-1600-03B	9
E-1600-03B-EWP	9
E-1600-03-IP	9
E-1600-03-IPEWP	9
E-1600-20A	9
E-1600-20A-EWP	9
E-1600-20-IP	9
E-1600-20-IPEWP	9
E-1600-22-IP	9
E-1600-22-IPEWP	9
E-1600-30A	9
E-1600-30A-EWP	9
E-1600-30-IP	9
E-1600-30-IPEWP	9
E-1600-32A	9
E-1600-32A-EWP	9
E-1600-32-IP	9
E-1600-32-IPEWP	9
E-1600-40A	8
E-1600-40A-EWP	8
E-1600-40-IP	8
E-1600-40-IPEWP	8
E-1600-45A	8
E-1600-45A-EWP	8
E-1600-45-IP	8
E-1600-45-IPEWP	8
E-1600-50A	11
E-1600-50A-EWP	11
E-1600-50-IP	11
E-1600-50-IPEWP	11
E-1600-52A	11
E-1600-52A-EWP	11
E-1600-52-IP	11

Model	Page
E-1600-52-IPEWP	11
E-1600-53-IP	11
E-1600-53-IPEWP	11
E-1600-55A	11
E-1600-55A-EWP	11
E-1600-55-IP	11
E-1600-55-IPEWP	11
E-1600-60A	8
E-1600-60A-EWP	8
E-1600-60-IP	8
E-1600-60-IPEWP	8
E-1600-65A	8
E-1600-65A-EWP	8
E-1600-65-IP	8
E-1600-65-IPEWP	8
E-1600-912A	10
E-1600-912A-EWP	10
E-1600-912-IP	10
E-1600-912-IPEWP	10
E-1600A	8
E-1600A-AST2EWP	11
E-1600A-AST-EWP	11
E-1600A-BLT2EWP	11
E-1600A-BLT-EWP	11
E-1600A-EWP	8
E-1600A-GT-EWP	10
E-1600A-MK-GNP	33
E-1600A-RT-EWP	10
E-1600A-RTM-EWP	10
E-1600AST2IPEWP	11
E-1600-ASTIPEWP	11
E-1600A-TP2-EWP	10
E-1600A-TP-EWP	10
E-1600-BKA	8
E-1600-BKA-EWP	8
E-1600-BK-IP	8
E-1600-BK-IPEWP	8
E-1600-BLA	8
E-1600-BLA-EWP	8
E-1600-BL-IP	8
E-1600-BL-IPEWP	8
E-1600-BLPA	8
E-1600-BLPA-EWP	8
E-1600-BLP-IP	8
E-1600-BLPIPEWP	8
E-1600BLT2IPEWP	11
E-1600-BLTIPEWP	11
E-1600-GT-IPEWP	10
E-1600-IP	8
E-1600-IP-EWP	8
E-1600-RDA	8
E-1600-RDA-EWP	8

Model	Page
E-1600-RD-IP	8
E-1600-RD-IPEWP	8
E-1600-RT-IPEWP	10
E-1600-RTMIPEWP	10
E-1600-SSA	8
E-1600-SSA-EWP	8
E-1600-SS-IP	8
E-1600-SS-IPEWP	8
E-1600-TP2IPEWP	10
E-1600-TP-IPEWP	10
E-1600-YLA	8
E-1600-YLA-EWP	8
E-1600-YL-IP	8
E-1600-YL-IPEWP	8
E-20B	43
E-20B-EWP	43
E-20-IP	44
E-20-IP-EWP	44
E-20TF-IP	44
E-20TF-IP-EWP	44
E-30	43
E-30-EWP	43
E-30-IP	44
E-30-IP-EWP	44
E-30-PT	43
E-30-PT-EWP	43
E-30TF-IP	44
E-30TF-IP-EWP	44
E-32	43
E-32-EWP	43
E-32-IP	44
E-32-IP-EWP	44
E-32TF-IP	44
E-32TF-IP-EWP	44
E-32T-SS-IP	47
E-32T-SS-IP-EWP	47
E-35	43
E-35-EWP	43
E-35-IP	44
E-35-IP-EWP	44
E-40-BK	45
E-40-BK-EWP	45
E-40-BN	45
E-40-BN-EWP	45
E-40-SS	45
E-40-SS-EWP	45
E-40-WH	45
E-40-WH-EWP	45
E-50-BK	45
E-50-BK-EWP	45
E-50-BN	45

Model	Page
E-50-BN-EWP	45
E-50-SS	45
E-50-SS-EWP	45
E-50-WH	45
E-50-WH-EWP	45
E-60-BK	45
E-60-BK-EWP	45
E-60-BK-IP	44
E-60-BK-IP-EWP	44
E-60-BN	45
E-60-BN-EWP	45
E-60-BN-IP	44
E-60-BN-IP-EWP	44
E-60-SS	45
E-60-SS-EWP	45
E-60-SS-IP	44
E-60-SS-IP-EWP	44
E-60-WH	45
E-60-WH-EWP	45
E-60-WH-IP	44
E-60-WH-IP-EWP	44
E-65-BK	45
E-65-BK-EWP	45
E-65-BN	45
E-65-BN-EWP	45
E-65-SS	45
E-65-SS-EWP	45
E-65-WH	45
E-65-WH-EWP	45
E-70-BK	45
E-70-BK-EWP	45
E-70-BN	45
E-70-BN-EWP	45
E-70-SS	45
E-70-SS-EWP	45
E-70-WH	45
E-70-WH-EWP	45
E-75-BK	45
E-75-BK-EWP	45
E-75-BN	45
E-75-BN-EWP	45
E-75-SS	45
E-75-SS-EWP	45
E-75-WH	45
E-75-WH-EWP	45
ERAM-4M	40
ES-1	38
ES-3	40
FAXJ-1000	28
FBI-1A	21
FXI-1A	21



# PRODUCT INDEX by Model Number

Model	Page
HF-3W	21
K-1200	36
K-1200-EWP	36
K-1200-IP	36
K-1200-IP-EWP	36
K-1205	36
K-1205-EWP	36
K-1205-IP	36
K-1205-IP-EWP	36
K-1270	36
K-1270-EWP	36
K-1270-IP	36
K-1270-IP-EWP	36
K-1275	36
K-1275-EWP	36
K-1275-IP	36
K-1275-IP-EWP	36
K-1500-6A	14
K-1500-7	14
K-1500-EHFA	12
K-1500P-D	16
K-1500P-D ASH	16
K-1500P-W	16
K-1500P-W ASH	16
K-1600-EHFA	11
K-1700-3	37
K-1700-3-BN	37
K-1700-3-BN-EWP	37
K-1700-3-EWP	37
K-1700-BN-IP	37
K-1700-BN-IP-EWP	37
K-1700-IP	37
K-1700-IP-EWP	37
K-1705-3	37
K-1705-3-BN	37
K-1705-3-BN-EWP	37
K-1705-3-EWP	37
K-1705-BN-IP	37
K-1705-BN-IP-EWP	37
K-1705-IP	37
K-1705-IP-EWP	37
K-1770-BN-IP	37
K-1770-BN-IP-EWP	37
K-1770-IP	37
K-1770-IP-EWP	37
K-1775-BN-IP	37
K-1775-BN-IP-EWP	37
K-1775-IP	37
K-1775-IP-EWP	37
K-1900-3	39
K-1900-30	17

Model	Page
K-1900-5	17
K-1900-6-IP	15
K-1900-6-IP-EWP	15
K-1900-7	14
K-1900-712L	14
K-1900-712L-EWP	14
K-1900-712L-IP	15
K-1900712LPEWP	15
K-1900-7-EWP	14
K-1900-7-IP	15
K-1900-7-IP-EWP	15
K-1900-8	14
K-1900-812L	14
K-1900-812L-EWP	14
K-1900-812L-IP	15
K-1900812LPEWP	15
K-1900-8-EWP	14
K-1900-8-IP	15
K-1900-8-IP-EWP	15
K-1900-9	17
K-1900D-2	16
K-1900D-2 ASH	16
K-1900D-IP	16
K-1900D-IP ASH	16
K-1900W-2	16
K-1900W-2 ASH	16
K-1900W-IP	16
K-1900W-IP ASH	16
K-2000-DVA	17
K-202-DVA	17
K-600F	21
LC-3	13
LC-6	13
LC-8	13
LDB-1	25
LDB-2	25
LDB-3	25
LLA-1	31
LLA-4	31
LM-1A	30
LM-24D	13
LPL-1	30
LPR-1	25
LRR-4	38
LRT-4	38
LSD-2	10
LSR-1	10
LV-1K	12
LVR-1	12
M2W	22
MTG-10	25

Model	Page
NS-1	26
PA-15	20
PA-250	20
PA-250-IP	18
PA-2A	20
PA-30	20
PA-60	20
PA-IP	18
PAN-1A	25
PB-1	12
PB-100	40
PB-3	12
PB-3-IP	12
PC-7	26
PF-6A	29
PI-1A	21
PJ-14	26
PNL-VCAM-2-BN	36
PNL-VCAM-2-SS	36
PP-250	20
PRX-1	38
PRX-2	38
PRX-3	38
PRX-3-MK-GNP	38
PRX-3-MK-VEGNP	38
PRX-4	38
PRX-5	38
PRX-C	38
PRX-C-ISO	38
PRX-FOB	38
PS-48-RGA	26
PSA-IP	18
PSA-TB-IP	18
Q170600 RINGER	16
RAD-1A	21
RAD-AMP	26
RC-2A	41
RC-3	41
RC-4A	41
RG-10A	31
RG-204	31
RG-224	31
RG-4	31
SA-1H	23
SA-1S	23
SA-25	23
SA-IR	23
SA-TBA	22
SA-X12	23
SL-2	30
SL-2-EWP	30

Model	Page
SLP-1	23
SLP-4	23
SR-1	23
SRC-1	41
SR-IP	23
SRL-1	23
SV-5W	26
TBB-1B	31
TDR-1	25
TG-1	26
TR-1	26
VCAM-1	36
VCAM-1IR	36
VCAM-2-BN	36
VCAM-2-SS	36
VE-3x5	33
VE-5x10	33
VE-5x10-NR	33
VE-5x10-NR-SS	33
VE-5x10-PNL	33
VE-5x10-PNL-NR	33
VE-5x10-PNLNRSS	33
VE-5x10-PNL-SS	33
VE-5x10-SS	33
VE-5x5	32
VE-5x5-NR	32
VE-5x5-NR-RD	32
VE-5x5-NR-SS	32
VE-5x5-NR-WH	32
VE-5x5-NR-YL	32
VE-5x5-PNL	32
VE-5x5-PNL-NR	32
VE-5x5-PNL-NRRD	32
VE-5x5-PNL-NRSS	32
VE-5x5-PNL-NRWH	32
VE-5x5-PNL-NRYL	32
VE-5x5-PNL-RD	32
VE-5x5-PNL-SS	32
VE-5x5-PNL-WH	32
VE-5x5-PNL-YL	32
VE-5X5-RD	32
VE-5x5-SS	32
VE-5x5-WH	32
VE-5x5-YL	32
VE-6x7	32
VE-6x7-NR	32
VE-6x7-NR-SS	32
VE-6x7-PNL	32
VE-6x7-PNL-NR	32
VE-6x7-PNL-NRSS	32
VE-6x7-PNL-SS	32

Model	Page
VE-6x7-SS	32
VE-9x12B-0P	34
VE-9x12B-1P	34
VE-9x12B-2P	34
VE-9x12B-3P	34
VE-9x12MK-1	34
VE-9x12MK-2	34
VE-9x12MK-3	34
VE-9x12R-0P	34
VE-9x12R-1P	34
VE-9x12R-2P	34
VE-9x12R-3P	34
VE-9x12Y-0P	34
VE-9x12Y-1P	34
VE-9x12Y-2P	34
VE-9x12Y-3P	34
VE-ARSW	13
VE-GNP	33
VE-GNP-2	33
VE-GNP-IG	33
VE-GNP-SS	33
VE-LIGHT	33
VE-PBL	34
VE-RMB	33
VE-SPG	34
VR-1B	30
W-1000	35
W-1000-EWP	35
W-2000A	35
W-2000A-EWP	35
W-3000	35
W-3000-EWP	35
W-3005	35
W-3005-EWP	35
X-1605	46
X-1605-32	46
X-1605-32-EWP	46
X-1605-EWP	46
X-205-BK	47
X-205-BK-EWP	47
X-205-BN	47
X-205-BN-EWP	47
X-205-SS	47
X-205-SS-EWP	47
X-35-BK	46
X-35-BK-EWP	46
X-35-BN	46
X-35-BN-EWP	46
X-35-SS	46
X-35-SS-EWP	46
ZPI-4	22

# 2025 | TABLE of CONTENTS

## EMERGENCY COMMUNICATION 7-13

Analog and VoIP ADA Compliant Emergency Phones .....	7-12
Stainless Steel Speaker Phones .....	8-10
Red / Yellow / Blue Surface Mount Phones .....	8
Double Gang Mount Phone .....	9
Flush Mount Panel Phones .....	9-10
Direct Replacement Phones .....	10
Line Seizure Relay .....	10
Emergency Phone Kits .....	11
No-Chassis Phones .....	11
Tower Phones with Strobe Light .....	11
Analog to VoIP Conversion Kit .....	11
Elevator Phone Box Emergency Phones .....	11-12
Panic Buttons .....	12
Line Verification Panel with Key Switch .....	12
Area of Refuge Accessories .....	13
Line Sharing .....	10, 13
Line Status Display .....	13
Line Concentrators .....	13

## TELEPHONES 14-16

Analog Stainless Steel Panel Phones with Handsets .....	14
VoIP Stainless Steel Panel Phones with Handsets .....	15
Multi-Number Dialer Phones .....	14-15
Hot-Line and Courtesy Phones .....	14-16
Single Number Dialer Phones .....	14-16
Dial-Less Phones with Ringers .....	16
Electronic Ringer .....	16
Classic VoIP Phones with Auto Dialer .....	16

## DIALERS 17

Touch Tone Dialer .....	17
100 Number Speed Dialer .....	17
Smart Touch Tone Dialer .....	17
Alarm Dialers / Announcers .....	17

## PAGING PRODUCTS 18-23

IP Paging .....	18-19
Paging Amplifiers .....	18, 20
Anti-Feedback Paging Interface .....	21
Talk-Back Amplifier .....	21
Night Bell .....	21
Telecom Paging Interface .....	21
Page Port / Trunk Input / FXO / FXS Paging Interface .....	21
Loud Call Announce / Ringing Amplifier .....	22
Zone Paging Controller .....	22
Paging Speakers, Horns, and Accessories .....	22
Clock Controlled Tone Generator .....	23
Mass Notification Announcer .....	23
Audio Isolation Board .....	23
Single Line Paging Controllers .....	23
SIP and Analog Ringers .....	23
Self-Amplified Paging System .....	23

## CLOCK SYSTEMS 24

Master Clock / Networked Clock Control Over Paging .....	24
Wireless Synchronized Clocks and Accessories .....	24
RF Transmitter .....	24

## PROBLEM SOLVERS 25-31

Loop and Ring Detectors .....	25
Panasonic® Doorphone Station Adapter .....	25
Line Powered Ringer .....	25
Tone Generator .....	25
Time Delay Relay .....	25
CPC Disconnect .....	25
Toll Restrictor .....	26
Buttons and Switches .....	26
Privacy Devices .....	26
Miscellaneous Gadgets .....	25-26
Remote Access Device .....	21, 26
Digital Voice Announcer .....	28
Phone / Fax Routing Switch .....	28
Ringdown Circuits .....	29
Ground to Loop Start Converter .....	29
Power Fail Bypass .....	29
Strobe Lights .....	30
Telephone Status Indicators .....	30
Ring Boosters .....	31
Talk Battery Booster .....	31
Long Loop Adapters .....	31

## ENCLOSURES 32-34

Surface Mount Boxes .....	32-33
Blank Panel Surface Mount Boxes .....	32-33
LED Lighting Kit .....	33
Mounting Accessories .....	33
Gooseneck Pedestals .....	33
Outdoor Enclosures and Accessories .....	34

## ACCESS CONTROL 35-45

Door Entry and CCTV Controller .....	35
Doorboxes .....	35
12 Button Apartment Entry Systems .....	36
Analog Entry Phones with Keypads .....	37
VoIP Entry Phones with Keypads .....	37
Analog Entry Phones with Keypads and Cameras .....	37
VoIP Entry Phones with Keypads and Cameras .....	37
Analog Entry Phones with Proximity Readers .....	37
VoIP Entry Phone Systems with Proximity Readers .....	37
Proximity Readers and Keypads .....	38
Proximity Cards and Fobs .....	38
Proximity Entry Controller .....	38
Wireless Access Control System .....	38
Apartment / Office Door Entry Dialers / Controllers .....	39
"No Phone Line" Entry Controller .....	39
Directories .....	39
Accessible Entry System .....	40
Touch Tone Controlled Relays .....	41
Network Enabled Relay Controller .....	41
Entry Phone Interface / Controllers .....	42
Analog Entry Phones .....	43
Touch-Free Entry Phones .....	44
VoIP Entry Phones .....	44
Single Gang Entry Phones .....	45
Double Gang Entry Phones .....	43-45

## X-SERIES 46

IP Intercoms with HD Video .....	46
IP Emergency Phones with HD Video .....	46
Compact IP Intercoms with HD Video .....	47
IP Intercoms .....	47

## FEATURES and OPERATION for Viking ADA Compliant Emergency Phones

Need  
HD Video?  
See the X-SERIES  
Emergency Phones  
PAGE 46

- Analog or VoIP models
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Cycles through up to 5 emergency numbers on busy or no answer
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating (page 27)
- Complies with ASME A17.1 Elevator Code when used with LV-1K (page 12)



### Analog: 1600A Series

#### ANALOG FEATURES and OPERATION

- Telephone line powered
- Connect to a CO line, analog PABX station, or FXS port
- Compatible with Central Station Monitoring (CSM)
- 16 second I.D. announcement
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out
- Temperature range: -30°F to 170°F

The 1600A Series Emergency Phones are designed to provide quick and reliable access to emergency personnel via two-way, handsfree voice communication over a telephone network. The 1600A Series have Braille labels and meet ADA requirements for elevator telephones. The phones can be programmed on-site or remotely from a touch tone phone.

When the "Help" button is pressed, the 1600A Series phone goes off-hook, and the built-in touch tone dialer calls the pre-programmed 1 to 20 digit number. The "Connected" LED flashes during dialing. In the event that the line is busy or there is no answer, the unit can automatically dial up to 4 more numbers. When the call is answered, the 1600A Series phone lights the "Connected" LED steady and sends a field-programmed 1 to 20 digit touch tone number or 16 second voice announcement indicating the location of the emergency phone.

Use the PB-100 (see page 40) to remotely program and poll emergency phones as to their working status.

### VoIP: 1600-IP Series

#### VOIP FEATURES and OPERATION

- 2 Amp relay contacts for lights, strobes, chimes, door or gate control, etc.
- SIP compliant and PoE powered (class 1, <4 Watts)
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- 28 second I.D. announcement
- Temperature range: -40°F to 140°F
- Hangs up on busy signal, time-out, or touch tone command

The 1600-IP Series Emergency Phones are designed to provide quick and reliable handsfree communication for SIP VoIP phone systems with PoE. All 1600-IP Series phones meet ADA requirements for elevator and emergency telephones, and can be programmed from any touch tone phone or PC on the same LAN or remotely using a static IP address.

When the "Help" button is pressed, the 1600-IP Series phone dials a pre-programmed telephone number. The "Connected" LED momentarily flashes during dialing. In the event the line is busy or there is a ring-no-answer, the unit can be programmed to call additional phone numbers. The phone then cycles through up to 5 pre-programmed emergency numbers until the call is answered. When the call is answered, the digital voice announcer will automatically play to identify the location of the emergency call and then light the "Connected" LED to show that handsfree communication to emergency personnel is established. The "\*" key will send the I.D. number (if programmed), and play the announcement again. The distant party will know the location of the emergency call by either the voice announcement or by decoding the touch tone I.D. number.

Installation requires a network administrator / IT technician.

## Low-Profile Emergency Phones



E-1600-RDA E-1600-RD-IP      E-1600-SSA E-1600-SS-IP      E-1600-YLA E-1600-YL-IP      E-1600-BLA E-1600-BL-IP

- Compact low-profile design
- Material: Steel with durable high visibility textured powder paint or brushed stainless steel finish
- Dimensions: 5.75" x 3.08" x 1.05"
- Mounting: Surface mount to walls, posts, or single gang boxes
- For features and operation, see page 7



E-1600-BKA E-1600-BK-IP      E-1600-BLPA E-1600-BLP-IP

Model	Finish	Analog	VoIP	EWP
E-1600-BKA	Black	•		
E-1600-BKA-EWP	Black	•		•
E-1600-BK-IP	Black		•	
E-1600-BK-IPEWP	Black		•	•
E-1600-BLA	Blue	•		
E-1600-BLA-EWP	Blue	•		•
E-1600-BL-IP	Blue		•	
E-1600-BL-IPEWP	Blue		•	•
E-1600-BLPA	Blue	•		
E-1600-BLPA-EWP	Blue	•		•
E-1600-BLP-IP	Blue		•	
E-1600-BLPIPEWP	Blue		•	•
E-1600-RDA	Red	•		
E-1600-RDA-EWP	Red	•		•
E-1600-RD-IP	Red		•	
E-1600-RD-IPEWP	Red		•	•
E-1600-SSA	Stainless	•		
E-1600-SSA-EWP	Stainless	•		•
E-1600-SS-IP	Stainless		•	
E-1600-SS-IPEWP	Stainless		•	•
E-1600-YLA	Yellow	•		
E-1600-YLA-EWP	Yellow	•		•
E-1600-YL-IP	Yellow		•	
E-1600-YL-IPEWP	Yellow		•	•

## Compact Emergency Phones



E-1600A E-1600-IP      E-1600-45A E-1600-45-IP      E-1600-60A E-1600-60-IP      E-1600-65A E-1600-65-IP

- Material: Steel with durable high visibility textured powder paint
- Includes Braille label, "Call Connected" LED, and I.D. Announcement for ADA compliance
- Dimensions: 5.25" x 4.0" x 2.0"
- Mounting: Surface mount to walls, posts, single gang boxes, or recess mount in elevator phone boxes
- For features and operation, see page 7

E-1600-40A  
E-1600-40-IP

Emergency phones with no lettering for custom applications. Braille label included.



Model	Color	Analog	VoIP	EWP
E-1600A	Red	•		
E-1600A-EWP	Red	•		•
E-1600-IP	Red		•	
E-1600-IP-EWP	Red		•	•
E-1600-40A	Red	•		
E-1600-40A-EWP	Red	•		•
E-1600-40-IP	Red		•	
E-1600-40-IPEWP	Red		•	•
E-1600-45A	Yellow	•		
E-1600-45A-EWP	Yellow	•		•
E-1600-45-IP	Yellow		•	
E-1600-45-IPEWP	Yellow		•	•
E-1600-60A	Blue	•		
E-1600-60A-EWP	Blue	•		•
E-1600-60-IP	Blue		•	
E-1600-60-IPEWP	Blue		•	•
E-1600-65A	Blue	•		
E-1600-65A-EWP	Blue	•		•
E-1600-65-IP	Blue		•	
E-1600-65-IPEWP	Blue		•	•



## Vandal Resistant Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in elevator cabs, stairwells, hallways, etc.
- Dimensions: 13.0" x 10.5" x 2"
- Heavy-duty panel with laser etched lettering for years of use



Model	Analog	VoIP	EWP
E-1600-02A	•		
E-1600-02A-EWP	•		•
E-1600-02-IP		•	
E-1600-02-IPEWP		•	•

- For features and operation, refer to page 7

## Heavy-Duty Phone

- Material: Heavy duty marine grade 316 stainless steel with #4 brushed finish
- Mounting: Surface mount to walls, posts, single or double gang boxes or recess mount in elevator phone boxes
- Suitable for areas with vandalism issues
- Dimensions: 7.22" x 5.36" x 1.55"



Model	Analog	VoIP	EWP
E-1600-03B	•		
E-1600-03B-EWP	•		•
E-1600-03-IP		•	
E-1600-03-IPEWP		•	•

- For features and operation, refer to page 7

## Two-Button Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount with included plastic rough-in box or use an optional **VE-Series** Surface Mount Box, sold separately (page 32)
- INFO button dials additional numbers for general info or directions



Model	Analog	VoIP	EWP
E-1600-20A	•		
E-1600-20A-EWP	•		•
E-1600-20-IP		•	
E-1600-20-IPEWP		•	•

- Dimensions: 5.0" x 5.0" x 2.25"
- For features and operation, refer to page 7

## Double-Gang Mount Two-Button Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in a standard double-gang electrical box
- INFO button dials additional numbers for general info or directions
- Dimensions: 5.0" x 5.0" x 2.25"



Model	Analog	VoIP	EWP
E-1600-22-IP		•	
E-1600-22-IPEWP		•	•

- For features and operation, refer to page 7

## Standard Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount with included plastic rough-in box or use an optional **VE-Series** Surface Mount Box, sold separately (page 32)
- Dimensions: 5.0" x 5.0" x 2.25"



Model	Analog	VoIP	EWP
E-1600-30A	•		
E-1600-30A-EWP	•		•
E-1600-30-IP		•	
E-1600-30-IPEWP		•	•

- For features and operation, refer to page 7

## Double-Gang Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in a standard double-gang electrical box
- Dimensions: 5.0" x 5.0" x 2.25"



Model	Analog	VoIP	EWP
E-1600-32A	•		
E-1600-32A-EWP	•		•
E-1600-32-IP		•	
E-1600-32-IPEWP		•	•

- For features and operation, refer to page 7

## Direct Replacement Emergency Phones

### ADA Compliant Replacement Phones for Code Blue / GAI-Tronics / Ramtel / Talkaphone

- Direct replacement for select GAI-Tronics, Ramtel, and Talkaphone panel phones
- Replacing Code Blue tower phones requires redrilling and tapping
- Flush mount to: Code Blue, GAI-Tronics, Ramtel, and Talkaphone towers / wall mounts / boxes / pedestals
- Comes standard with Enhanced Weather Protection (EWP), see page 27
- Material: Brushed marine grade 316 stainless steel
- For features and operation, see page 7

Model	Replaces	Analog	VoIP	EWP
E-1600A-TP-EWP	Select Talkaphone and Code Blue models	•		•
E-1600A-TP2-EWP	Select two-button Talkaphone and Code Blue models	•		•
E-1600A-GT-EWP	Select GAI-Tronics models	•		•
E-1600A-RT-EWP	Select Ramtel models	•		•
E-1600A-RTM-EWP	Select Ramtel models	•		•
E-1600-TP-IPEWP	Select Talkaphone and Code Blue models		•	•
E-1600-TP2IPEWP	Select two-button Talkaphone and Code Blue models		•	•
E-1600-GT-IPEWP	Select GAI-Tronics models		•	•
E-1600-RTMIPEWP	Select Ramtel models		•	•
E-1600-RT-IPEWP	Select Ramtel models		•	•



## Emergency Panel Phone

- Material: Brushed marine grade 316 stainless steel
- Dimensions: 11.23" x 7.08" x 2"
- Heavy-duty panel with laser etched lettering for years of use
- For features and operation, see page 7

These panel phones are specifically designed to fit seamlessly within Viking's VE-9x12 Outdoor Enclosures. Ideal for both indoor and outdoor swimming pool areas, or any location requiring a protected emergency phone.

Model	Analog	VoIP	EWP
E-1600-912A	•		
E-1600-912A-EWP	•		•
E-1600-912-IP		•	
E-1600-912IPEWP		•	•

Phone shown in Red Enclosure (VE-9x12R-0P) sold separately

Yellow (VE-9x12Y-0P) or Black (VE-9x12B-0P) Enclosures available



For more info on Viking Enclosures, see page 34.



## Line Seizure Relay

- Emergency device can share a line with a phone system
- Can be used on any CO line or analog PABX / KSU station
- Interrupts a call in progress and returns fresh dial tone to the emergency phone
- Off hook indication for emergency device port
- Easy modular connections

**Model**  
LSR-1



## Smart Line Sharing Device


- Allows an emergency device to share a line with other devices
- Routes incoming and outgoing calls
- Priority to emergency devices
- Incoming calls routed to one of two ports by Caller ID, Distinctive Ring, or Call Back
- Stores up to 12 Caller ID numbers

**Model**  
LSD-2



## Emergency Phone Kit for Custom Installations

- Material: Zinc plated steel
- Mounting: Install behind elevator panels for applications requiring a custom panel
- Dimensions: 5.0" x 5.0" x 2.25"



Model	Analog	VoIP	EWP
E-1600-55A	•		
E-1600-55A-EWP	•		•
E-1600-55-IP		•	
E-1600-55-IPEWP		•	•

- For features and operation, refer to page 7

## 42-Inch Tower Phones with Blue LED Strobe

- High intensity flashing LED strobe light with steady-on beacon option, 4 flash patterns and 6 brightness settings
- Strobe: Vandal resistant polycarbonate plastic
- Tower Chassis: 3.0" x 6.0" aluminum rectangular tube
- Phone Panel: 316 marine grade stainless steel faceplate and stainless steel button
- Mounting: Surface mount to wall or post
- Strobe power supply included
- Comes with Enhanced Weather Protection (EWP), see page 27
- For features and operation, see page 7




Model	Lettering	Buttons	Analog	VoIP	EWP
E-1600A-AST-EWP	Assistance	1	•		•
E-1600A-AST2EWP	Assistance	2	•		•
E-1600-ASTIPEWP	Assistance	1		•	•
E-1600AST2IPEWP	Assistance	2		•	•
E-1600A-BLT-EWP	Emergency	1	•		•
E-1600A-BLT2EWP	Emergency	2	•		•
E-1600-BLTIPEWP	Emergency	1		•	•
E-1600BLT2IPEWP	Emergency	2		•	•

## Emergency Phone Parts Kits

Viking Emergency Phone "parts kits" are specifically designed to be used behind custom panels or with competitor's panels. These are parts kits and do not include a chassis.

### Kit includes:

- Circuit board
- Speaker
- LED
- Microphone
- Button(s)
- Braille label

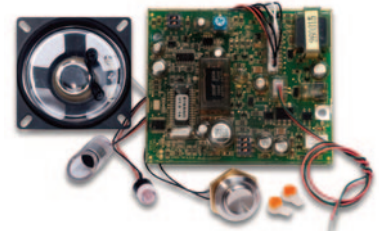

For features and operation, refer to page 7

Model	Description	Analog	VoIP	EWP
E-1600-50A	Parts kit with 1 button	•		
E-1600-50A-EWP	Parts kit with 1 button	•		•
E-1600-50-IP	Parts kit with 1 button		•	
E-1600-50-IPEWP	Parts kit with 1 button		•	•
E-1600-52A	Parts kit with 2 buttons	•		
E-1600-52A-EWP	Parts kit with 2 buttons	•		•
E-1600-52-IP	Parts kit with 2 buttons		•	
E-1600-52-IPEWP	Parts kit with 2 buttons		•	•

## Analog to VoIP Conversion Kit

The E-1600-53-IP conversion kit converts select Viking analog phones to VoIP. The kit saves money by re-using the housing, faceplate, mic, speaker, switch, and LED.



Model	Analog	VoIP	EWP
E-1600-53-IP		•	
E-1600-53-IPEWP		•	•

For features and operation, refer to page 7

## Emergency Phone for Elevator Phone Box

- Red powder painted aluminum
- Mounting: Recess mount in standard elevator phone box (10" x 7" x 3")
- Dimensions: 9.875" x 6.86" x 2.1"
- For features and operation, see page 7

Model	Analog	VoIP	EWP
K-1600-EHFA	•		





## All-In-One Emergency Phone Panic Buttons

The **PB-3**, an analog model, and the **PB-3-IP**, an IP-based version, offer reliable and efficient solutions for initiating emergency protocols. Both models are equipped with a large, easy-to-activate button, making them ideal for schools, businesses, and public facilities where quick access to emergency services is crucial.

These panic buttons are simple to use yet highly effective. Once pressed, they can directly dial emergency services and play an optional pre-recorded message, then leave the mic open for silent monitoring. This versatility makes them perfect for environments where quick action is essential.

- Built-in 5 number dialer
- Cycles through numbers on busy or no-answer
- Programming stored in non-volatile memory
- Optional custom ID announcement
- Built-in microphone for silent monitoring
- Built-in red LED lights up during an emergency call



Model	Analog	VoIP
PB-3	•	
PB-3-IP		•



## ALYSSA'S LAW

Named after Alyssa Alhadeff, a victim of the tragic Parkland school shooting, **Alyssa's Law** requires public schools to install panic alarms that can quickly alert law enforcement during an emergency, thereby speeding up police response times.

Viking panic buttons provide a solution that can help schools comply with the law and, most importantly, keep students and staff safe.



**Alyssa's Law** has passed in several states, and has been introduced at the federal level.

◀ STAY UP TO DATE with ALYSSA'S LAW

## Emergency Phone (non-ADA)

- Two wire installation: analog PABX, CO line, or FXS port powered
- Heavy-duty aluminum
- Durable red powder paint
- Recess mount in an elevator phone box
- Requires an external dialer (page 17)



Model  
K-1500-EHFA

- Dimensions: 10" x 7" x 3"

## Line Verification Panel


- Test **1600A Series** phones for dial tone
- Detects a cut or disconnected phone line
- ASME A17.1 Elevator Code compliant
- Use on analog devices or an analog line
- Use with Viking **1600-IP Series** phones to indicate LAN connection failures



Model  
LV-1K

## Silent Panic Button Kit

- Use in conjunction with a Viking **1600A Series** or **1600-IP Series** emergency phone, or a **K-202-DVA / K-2000-DVA** alarm dialer (not included)
- LED can indicate call connected
- Unobtrusive - mount anywhere at any angle with foam tape



Model  
PB-1

## Line Verification Relay

The **LVR-1** Line Verification Relay monitors the service on analog phone lines or extensions and provides switched relay contacts when an analog phone line is down.


- On board relay with both NO and NC contacts
- Connect phone line via RJ-11 or terminal block
- Connect power via 2.1mm plug or terminal block



Model  
LVR-1

## Area of Refuge Signs and Accessories

Compliant with IBC, ADA, NFPA, and ICC Requirements

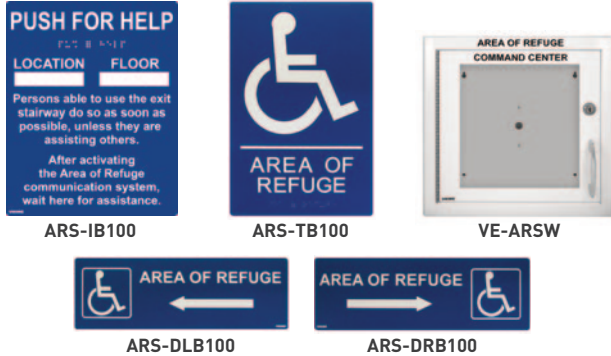

**ARS-TB100:** 6" wide x 9" tall tactile sign with 0.031" raised white letters and accessibility symbol, California compliant contracted grade 2 Braille.

**ARS-IB100:** 6" wide x 7.5" tall instructional sign with 0.031" raised white "Push For Help" letters and engraved white text, California compliant contracted grade 2 Braille.

**ARS-DLB100** (left arrow) and **ARS-DRB100** (right arrow): 12" wide x 4" tall directional sign with engraved white text.

**VE-ARSW:** Area of Refuge surface mount command center cabinet. Lockable for mounting "Two-Way Communications System" phone in low rise (less than 60 ft tall) buildings.

Model	Description
ARS-DLB100	Left arrow directional sign
ARS-DRB100	Right arrow directional sign
ARS-IB100	Instructional Braille and raised letter sign
ARS-TB100	Blue tactile Braille and raised letter sign
VE-ARSW	Command center cabinet

## AREA OF REFUGE

Plan a system that supports your people and meets requirements!

An Area of Refuge is a location where individuals with mobility challenges can wait for assistance in the event of an emergency.

Address common questions and requirements around Areas of Refuge or Areas of Rescue Assistance.



LEARN MORE >>



## Line Status Display

- Compatible with Viking's LC-6 Line Concentrator
- Displays require only one pair of wires
- Adjustable audio volume



Model  
LM-24D

## 6 Port Line Concentrator

The **LC-6** Line Concentrator eliminates the monthly charges for a dedicated line to each elevator. The **LC-6** is designed to be used with the Viking 1600A Series Elevator Phones. Up to six of these emergency phones can communicate with authorized personnel on 3 other phones within a building, or add a telephone line to allow communication outside the building. A call initiated by an emergency phone can dial internally, externally, or both. Any other phones that are activated will be bridged with authorized personnel, thus fulfilling ASME A17.1 requirements.

All telephone line inbound calls are answered by the **LC-6**. A touch tone command will route the call to any of the phone ports. If no command is detected within 4 seconds, the call will be routed to the last emergency phone that was used.

Model  
LC-6



- Share up to 6 devices
- Communicate with local and/or remote personnel
- Automatic answering of inbound calls
- Meets the ASME A17.1 requirements
- Separate ports for Fire Floor, Machine Room, and Lobby
- Programmable daily line verification check

## 3 Port Line Concentrator

- Fire Floor Phone port provided to meet elevator code
- Connects up to 3 devices
- Inbound calls can be transferred to any port

Model  
LC-3



## 8 Port Line Concentrator

- Share up to 8 devices
- Auto-answers inbound calls
- Call waiting
- Paging feature
- Fire floor phone connection
- Battery backup

Model  
LC-8




## Analog (No Dial) Panel Phones

The **K-1500-6A** and **K-1500-7** provide simple vandal resistant communication in a flush mount, stainless steel, panel telephone. The **K-1500-6A** and **K-1500-7** work with Viking's **DLE-200B** Line Simulator (page 29) or on a dedicated ringdown circuit. If dialing is necessary, use Viking's **K-1900-7** or combine the **K-1500-6A** or **K-1500-7** with Viking's **K-1900-5** Hot-Line Dialer (page 17).

The **K-1500-6A** and **K-1500-7** consist of a heavy gauge stainless steel panel, an armored cable, a heavy duty black hearing aid compatible amplified handset, and an all metal cradle. Both phones are designed to mount to a standard double gang electrical box.

- **K-1500-6A** Dimensions: 4.56"W x 4.5"H
- **K-1500-7** Dimensions: 5.0"W x 10.0"H
- Operates on: CO line or analog PABX / FXS station
- Flush mount to a standard double gang box
- Surface mount the **K-1500-7** with a **VE-5x10** Surface Mount Box (page 33) or a **VE-9x12** enclosure (page 34), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 25) or **SR-1** (page 23), each sold separately

Model	Analog	VoIP	EWP
K-1500-6A	•		
K-1500-7	•		

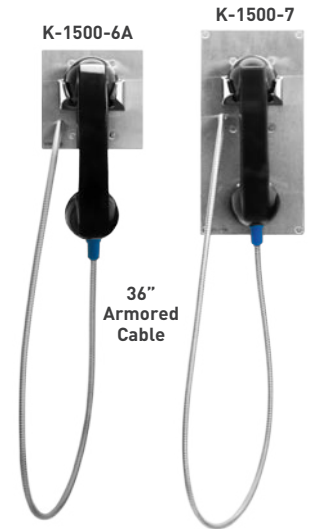

## Analog Hot-Line Panel Phone


The **K-1900-7 Series** panel phones will auto-dial a 1-32 digit programmable phone number each time the handset is lifted. The unit can touch tone or pulse dial and will not auto-dial on incoming calls.

Models **K-1900-712L** and **K-1900-712L-EWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 27.

Model	Description	Analog	VoIP	EWP
K-1900-7	36" armored cable	•		
K-1900-7-EWP	54" armored cable	•		•
K-1900-712L	12" armored cable and lanyard	•		
K-1900-712L-EWP	12" armored cable and lanyard	•		•

- Dimensions: 5.0"W x 10.0"H
- Vandal resistant 316 marine grade stainless steel panel
- Hearing aid compatible amplified handset with volume control
- Touch tone or pulse auto-dialing
- Armored cable and metal cradle
- Operating temperature: -30° to 140°F
- Optional **VE-5x10** Surface Mount Box (page 33) or a **VE-9x12** enclosure (page 34), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 25) or **SR-1** (page 23), each sold separately

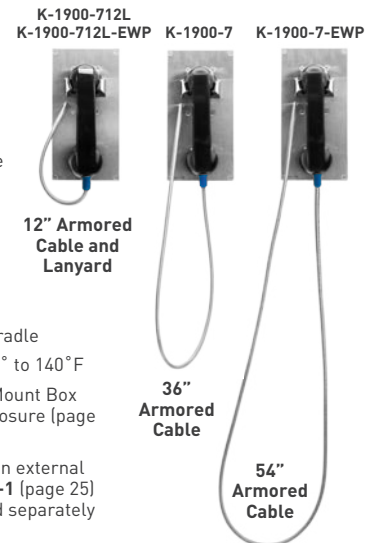

## Analog Panel Phone with Keypad


The **K-1900-8 Series** panel phones can either auto-dial a phone number each time the handset is lifted, be used as a multi-number auto-dialer, or be used as a standard (manual dial) phone. The unit will touch tone or pulse dial and will not dial on incoming calls.

Models **K-1900-812L** and **K-1900-812L-EWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 27.

Model	Description	Analog	VoIP	EWP
K-1900-8	36" armored cable	•		
K-1900-8-EWP	54" armored cable	•		•
K-1900-812L	12" armored cable and lanyard	•		
K-1900-812L-EWP	12" armored cable and lanyard	•		•


- Touch tone or pulse speed dialing with a programmable pre-dial pause
- Vandal resistant 316 marine grade stainless steel panel
- Tamper-resistant armored cable and metal cradle
- Dimensions: 5.0"W x 10.0"H
- Temperature range: -30° to 140°F
- Hearing aid compatible amplified handset with volume control
- Optional **VE-5x10** Surface Mount Box (page 33) or a **VE-9x12** enclosure (page 34), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 25) or **SR-1** (page 23), each sold separately

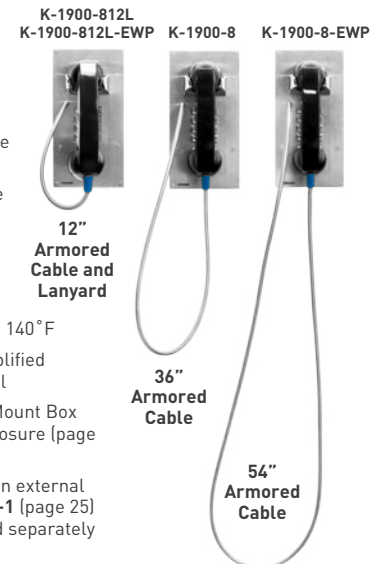



## VoIP Panel Phones with Dialer

K-1900-6-IP K-1900-6-IP-EWP

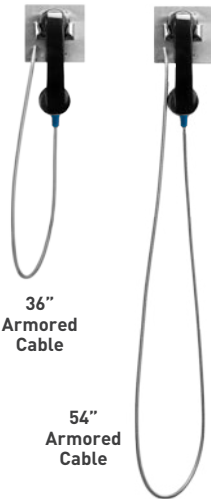

The **K-1900-6-IP Series** and **K-1900-7-IP Series** VoIP Panel Phones will auto-dial a 1-20 digit programmable phone number each time the handset is lifted. If the call is not answered, the phone will dial up to 3 additional phone numbers. The phones are PoE powered and can be programmed from any PC on the same LAN or remotely using a Static IP Address.


When a call initiated by the panel phone is answered by an apartment or business tenant, a built-in relay may be activated to control an electric gate or door strike. The relay can also be programmed to activate whenever the phone is off hook, ideal for controlling cameras, etc.

Models **K-1900-712L-IP** and **K-1900712LIPEWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 27.

- **K-1900-6-IP Series** Dimensions: 4.56"W x 4.5"H
- **K-1900-7-IP Series** Dimensions: 5.0"W x 10.0"H
- Provide vandal resistant communication for SIP VoIP phone systems

K-1900-712L-IP K-1900712LIPEWP K-1900-7-IP K-1900-7-IP-EWP

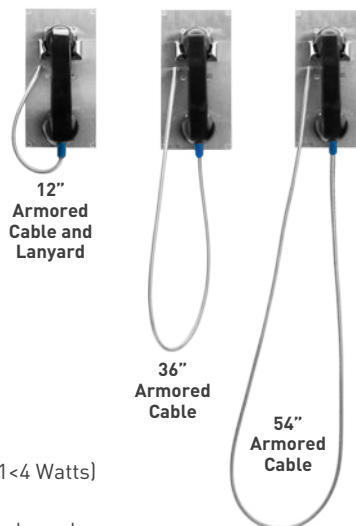

Model	Description	Analog	VoIP	EWP
K-1900-6-IP	36" armored cable		•	
K-1900-6-IP-EWP	54" armored cable		•	•
K-1900-7-IP	36" armored cable		•	
K-1900-7-IP-EWP	54" armored cable		•	•
K-1900-712L-IP	12" armored cable and lanyard		•	
K-1900712LIPEWP	12" armored cable and lanyard		•	•

- PoE powered (class 1 < 4 Watts)
- Built-in ringer
- Dials up to 3 additional numbers on busy or ring no answer
- Flush mount to a standard double gang box
- Surface mount any of the **K-1900-7-IP Series** phones with a **VE-5x10** Surface Mount Box (page 33) or a **VE-9x12** enclosure (page 34), each sold separately

## VoIP Panel Phone with Built-In Entry System

The **K-1900-8-IP Series** VoIP panel phones can either auto-dial a phone number each time the handset is lifted, be used as a multi-number auto-dialer, or be used as a standard manual dial phone. The panel phone is PoE powered and can be programmed from any PC on the same LAN or remotely using a Static IP Address.


The **K-1900-8-IP Series** phone can dial up to 250 programmable numbers and another 250 rollover numbers. When a call initiated by the panel phone is answered by an apartment or business tenant, a built-in relay may be activated to control an electric gate or door strike. A request for exit (REX) input is included for easy exiting.

Models **K-1900-812L-IP** and **K-1900812LIPEWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 27.

- Provide vandal resistant communication for SIP VoIP phone systems
- Speed dials up to 250 numbers, each with a rollover number
- Store up to 1000 keyless entry codes
- PoE powered (class 2 < 6.5 Watts)
- Event logging with time and date stamp
- 2 sets of relay contacts for door / gate / camera control
- 26-bit Wiegand input for optional proximity card readers
- Built-in ringer
- Dimensions: 5.0"W x 10.0"H

K-1900-812L-IP K-1900812LIPEWP K-1900-8-IP K-1900-8-IP-EWP

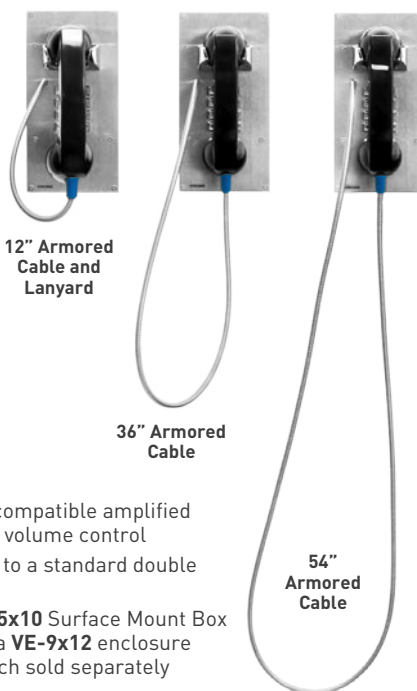

Model	Description	Analog	VoIP	EWP
K-1900-8-IP	36" armored cable		•	
K-1900-8-IP-EWP	54" armored cable		•	•
K-1900-812L-IP	12" armored cable and lanyard		•	
K-1900812LIPEWP	12" armored cable and lanyard		•	•

- Hearing aid compatible amplified handset with volume control
- Flush mount to a standard double gang box
- Optional **VE-5x10** Surface Mount Box (page 33) or a **VE-9x12** enclosure (page 34), each sold separately

## Single Number Auto-Dial Hot-Line Phones

The **K-1900 Series** of Hot-Line phones are programmable to dial a 1-32 digit telephone number each time the phone's handset is lifted. They can be programmed to touch tone or pulse dial and will not dial on incoming calls.

- 1-32 digit programmable speed dial number
- Telephone line powered and touch tone programmable
- Hearing aid compatible amplified handsets with volume control
- Touch tone and 10/20 pps pulse dialing
- Non-volatile memory (no batteries required)
- Restricts fraudulent calls from hand held dialers
- Available in red, ash or custom colors
- Operates on a CO line, analog PABX station, or FXS port
- Optional **Q170600 RINGER** can be added

Model	Description	Analog	VoIP
K-1900D-2	Red Hot-Line Desk Phone	•	
K-1900W-2	Red Hot-Line Wall Phone	•	
K-1900D-2 ASH	Ash Hot-Line Desk Phone	•	
K-1900W-2 ASH	Ash Hot-Line Wall Phone	•	
Q170600 RINGER	Electronic Ringer	•	



- Applications:**
- Courtesy and Emergency Phones
  - Customer Service
  - Airline / Hotel / Rental Car Reservations
  - Help Lines
  - Cash Machines
  - Taxi Service
  - Security
  - POS Displays

## Classic VoIP Phones with Auto Dialer

The **K-1900D-IP** and **K-1900W-IP** VoIP phones will automatically dial a 1-20 digit programmable phone number each time the handset is lifted. If the call is not answered, the phone will dial up to 3 additional phone numbers. The phones are designed to provide quick and reliable communication for SIP VoIP phone systems with PoE. The unit can be programmed from any PC on the same LAN or remotely using a Static IP Address.

- Built-in adjustable ringer
- Hearing aid compatible amplified handset
- SIP compliant
- PoE powered (class 1, <4 Watts)
- Outbound Proxy, Authentication ID, Peer to Peer, VLAN Tagging
- Network downloadable firmware
- Remotely programmable
- Optional **RC-4A** (page 41) for secure remote relay control

Model	Description	Analog	VoIP
K-1900D-IP	Red Hot-Line Desk Phone		•
K-1900W-IP	Red Hot-Line Wall Phone		•
K-1900D-IP ASH	Ash Hot-Line Desk Phone		•
K-1900W-IP ASH	Ash Hot-Line Wall Phone		•



- Applications:**
- Kiosk Phone
  - Hot-Line Phone
  - Courtesy Assistance Phone
  - Customer Service Phone
  - Automated Teller (ATM) Phone
  - Security or Emergency Phone

## Dial-Less Phones with Ringers

### Use to Receive Inbound Calls

These phones are compatible with ringdown circuits such as model **DLE-200B** (page 29), dialers such as Viking's **K-1900-5** and **K-1900-30** (page 17) as well as an analog PABX, CO line or FXS port configured as a ringdown circuit.

Model	Description
K-1500P-D	Red Manual Desk Phone
K-1500P-W	Red Manual Wall Phone
K-1500P-D ASH	Ash Manual Desk Phone
K-1500P-W ASH	Ash Manual Wall Phone



## Hot-Line Touch Tone Dialer

The **K-1900-5** is an analog PABX, CO line or FXS port powered dialer that automatically dials the programmed number each time the connected phone goes off-hook.

Model **K-1900-5** provides 1-32 digit touch tone dialing and 1 or 4 second pauses. The **K-1900-5** can also help eliminate toll fraud by blocking hand-held dialers and "hook-switch" or pulse dialing.

### Model

K-1900-5

- Touch tone programmable
- Telephone line powered
- No batteries required
- Ring detection, won't dial on inbound calls
- User programmable security code
- Programmable 1 and 4 second pauses
- Programmable dialing speed
- Can be configured to operate from a contact closure



## 2 Input Dialer / Announcer

The **K-202-DVA** is a two input, multi-number auto dialer and digital announcer, designed for emergency and non-emergency message notification.



- 2 normally open or normally closed dry contact inputs
- 2 minutes of record time (1 minute per input)
- Record messages locally or remotely
- Up to seven 32-digit phone numbers per input, 14 numbers total
- Rolls to the next number on busy or no answer
- Programmable message repeat and lap counter
- Terminals to connect a switch for local reset of all inputs
- Program with touch tone phone

- Call progress detection
- Power supply included

### Model

K-202-DVA

## 8 Input Dialer / Announcer

The **K-2000-DVA** is a programmable, eight input, multi-number auto dialer and digital announcer, designed for both emergency and non-emergency message notification.



- 8 normally open or normally closed dry contact inputs
- 8 minutes of record time (1 minute per input)
- Record messages locally or remotely
- Program with a touch tone phone or a PC
- Up to eight 32-digit phone numbers per input, 64 numbers total
- Rolls to the next number on busy or no answer
- Programmable message repeat and lap counter
- Terminals to connect a switch for local reset of all inputs

- Call progress detection
- "Store Caster" mode
- Power supply included

### Model

K-2000-DVA

## 100 Number Dialer

- Add speed dialing features to any analog phone
- Programmable as a single number hot-line dialer or program as a multi-number dialer
- Local or remote programming with a standard touch tone phone
- AC power allows installation on nearly any analog line
- Use on an analog PABX, CO line, or FXS port
- Stores up to (100) 32-digit phone numbers



### Model

K-1900-9

## Smart Touch Tone Dialer

- Add speed dialing features to any analog phone
- Applications include: Parking lot or ramp phones, ATM phones, door entry phones, etc.

When a connected device goes off-hook, the **K-1900-30** automatically dials a 1-20 digit phone number, and can be programmed to call up to 4 additional phone numbers if the line is busy, or is not answered. The **K-1900-30** can be used to add the smart dialing features of a Viking **E-30** to other non-dialing **E-Series** or **K-Series** phones, or any analog phone.



### Model

K-1900-30



## High Power SIP / Multicast Paging Amplifier

The **PA-250-IP** provides up to 250 Watts of loud paging for SIP based VoIP phone systems (hardware or hosted / cloud based service provider). The **PA-250-IP** can be used for standard SIP endpoint paging or multicast paging.

The **PA-250-IP** can drive up to two hundred fifty (250) 70V speakers and/or paging horns (each speaker set to "1 Watt tap"). The **PA-250-IP** features individual level controls with LED indicators for each input, automatic peak limiting, an adjustable Automatic Level Control, and bass & treble controls.

The unit easily connects with a single CAT5/6 cable from your network switch.



- SIP endpoint or multicast group member
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Audio from standard multicast sources
- Network downloadable firmware
- Access code prevents unwanted SIP calls
- Network remote volume control
- Programmable pre-page alert tone
- Powerful 70V amplifier drives up to 250 Watt load
- Door chime trigger input
- Auxiliary and background music inputs
- Individual and master volume control
- Bass and treble controls
- LEDs show audio level and activity
- Provides loud ringing
- 600 Ohm output to drive additional amplifiers
- Adjustable Automatic Level Control
- Tamper resistant trim pots

### Model

PA-250-IP

## SIP / Multicast Paging Adapter with Amplifier

- SIP endpoint and/or multicast group member
- PoE powered (class 3, <13 Watts)
- Paging prioritization
- Supports up to 10 multicast groups
- Relay for activating door locks, etc.
- Built-in 6 Watt class D amplifier can drive up to 6 analog 8 Ohm speakers
- Network downloadable firmware




- Line-level input for background music or mass notification
- Optional access code prevents unwanted SIP calls
- Line-level output for external amplifier

### Model

PA-IP

## IP Speaker for SIP/Multicast Paging

- SIP endpoint and/or multicast group member
- Supports up to 10 multicast paging groups
- PoE powered (class 3, <13 Watts)
- Built-in 6 Watt class D amplifier drives up to 5 analog 8 Ohm speakers
- Paging prioritization
- Dimensions: 11" diameter x 4" depth
- Line-level input and line-level output
- Network remote speaker volume control



### Model

40-IP

## IP Paging Speaker Adapter

Convert any 8 Ohm, 25V or 70V analog paging speaker into a SIP endpoint paging speaker. The speaker can then be used for standard one-way SIP endpoint paging or one-way multicast paging.

The compact chassis mounts magnetically to the back of the speaker magnet or attaches to the 25/70V transformer mounting holes on the speaker frame. Attach to the existing speaker wires then connect with a single CAT5/6 cable from your PoE switch.



The **PSA-IP** has a high efficiency 6 Watt class D amplifier capable of driving up to six 8 Ohm analog paging speakers.

### Model

PSA-IP

## IP Paging Speaker Adapter with Talk-Back

Convert any 8 Ohm, 25V or 70V analog paging speaker to an IP speaker for SIP endpoint paging, multicast paging and making standard or emergency SIP calls.

The compact chassis mounts magnetically to the back of the speaker magnet or attaches to the 25/70V transformer mounting holes on the speaker frame.

An optional auxiliary switch input allows a hard wired button or switch to initiate a SIP call. A momentary



button press will initiate a standard call, while holding the button for 3 or more seconds will initiate an emergency call. The microphone enables talk-back and monitors noise to adjust speaker volume.

### Model

PSA-TB-IP

## SIP / Multicast Paging Horn

The **300-IP** Paging Horn can be used for standard one-way SIP endpoint paging, multicast paging or background music.

The **300-IP** features a high efficiency 6 Watt class D amplifier capable of driving the horn at up to 113 dB SPL at 1 meter.

The **300-IP-EWP** shares all of the features of the **300-IP** in addition to Enhanced Weather Protection (EWP) for outdoor installations where the unit is exposed to precipitation or condensation.

- Large 10-inch diameter horn
- SIP compliant
- PoE powered (class 3, <13 Watts)
- SIP endpoint or multicast group member
- Built-in high-efficiency 6 Watt class D amplifier
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Access code to prevent unwanted SIP calls
- Hangs up on: busy signal, time-out, or touch tone command
- Network remote speaker volume control
- Programmable pre-page alert tone
- Waterproof RJ45 connector protects the connections from outside elements



Model	VoIP	EWP
300-IP	•	•
300-IP-EWP	•	•

## SIP / Multicast Paging Horn with Talk-Back

The **300TB-IP** can be used for: standard one-way SIP endpoint paging, two-way conversations via SIP endpoint paging, one-way multicast paging, and making standard or emergency two-way SIP calls initiated from the optional auxiliary switch input. The microphone enables talk-back and also monitors room noise to increase the speaker volume when necessary. The auxiliary switch input allows a hard wired button or switch to initiate a standard or emergency SIP call.

The **300TB-IP-EWP** shares all of the features of the **300TB-IP** in addition to Enhanced Weather Protection (EWP).

- Large 10-inch diameter horn
- SIP compliant
- PoE powered (class 3, <13 Watts)
- SIP endpoint or multicast group member
- Automatic Noise Canceling (ANC) feature for operation in noisy environments
- Selectable auto-answer feature for monitoring
- Built-in high-efficiency 6 Watt class D amplifier
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Support for access code to prevent unwanted SIP calls
- Hangs up on: busy, time-out, or touch tone command
- Network remote speaker volume control
- Automatic Gain Control (AGC) to automatically increase ring volume to compensate for ambient noise
- Waterproof RJ45 connector protects the connections from outside elements



Model	VoIP	EWP
300TB-IP	•	•
300TB-IP-EWP	•	•


## SIP / Multicast Talk-Back Speakers

Viking's Talk-Back Speakers enable two-way conversations via SIP and also allow for standard paging and background music via multicast. The Talk-Back Speakers easily connect with a single CAT 5/6 cable from your PoE switch. An auxiliary switch input allows a hard wired wall button to initiate a standard or emergency SIP call.

- PoE powered (class 3, <13 Watts)
- Up to 28 second ID announcement
- Plays audio from multicast
- SIP endpoint or multicast group member
- Up to 10 multicast paging groups
- Viking's proprietary VOX switching eliminates the need for "Push to Talk"
- Auto-answer feature for monitoring
- Built-in 6 Watt class D amplifier
- Automatic Noise Canceling (ANC) for noisy environments
- Drive up to 5 external analog speakers for more coverage
- Built-in relay to activate door locks, strobe lights, external amplifiers, etc.
- **40TB-IP's** shallow depth allows easy mounting in a wall or ceiling
- **22TB-IP** is designed for quick and easy installation in drop or suspended ceilings
- Line-level input and output

Model	Description
22TB-IP	24" x 24" Drop-In Ceiling Tile
40TB-IP	11" Diameter Speaker

**22TB-IP**  
Ceiling Tile  
(24" x 24")



**40TB-IP**  
11" Diameter  
Speaker



## 2 Watt Paging Amplifier / Loud Ringer

- For PABX and FXO applications
- Drives up to (3) 8 Ohm paging horns / speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, and 300AE** (see page 22)

The **PA-2A** monitors up to 6 analog lines for ringing or can be activated by a phone system contact closure. A loud electronic warble (108 dB @ 1 meter), double gong, quadruple chime or a door chime can be selected to announce incoming calls. To page, connect to a paging port, unused trunk input, or FXO port on a phone system. The unit provides 2 Watts of power - enough to drive three 8 Ohm speakers.

Model
PA-2A

The **PA-2A** has an input for loud ringing on/off switch, output for controlling a 12 Volt relay, and 600 Ohm output for sourcing high powered paging amplifiers. Includes one **25AE** paging horn and power supply.



## 15 Watt Telecom Paging Amplifier

- For Centrex, PABX, FXO and FXS applications
- Drives up to (15) 8 Ohm paging horns / speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, and 300AE** (see page 22)

The **PA-15** allows paging from a PABX paging port, an unused trunk input / FXO port (provides 36 Volts of talk battery), or an analog PABX station, Centrex, CO line or FXS port. The **PA-15** can disconnect on CPC, busy, silence or a 16 to 72 second (defeatable) timer. The **PA-15** can provide an alert tone prior to paging.

Model
PA-15

Background music (muted during page) can be added from an external source. Four electronic tones are available for loud ringing. Power supply included.



## 30 Watt Telecom Paging Amplifier

- For PABX and FXO applications
- Drives up to (30) 8 Ohm or (50) 70V or 25V speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, 300AE, 25AE-70V, and 30AE-70V** (see page 22)

The **PA-30** provides paging from the phone system paging port or connect to an unused trunk input or FXO port (provides 40 Volts of talk battery). The **PA-30** has separate inputs and volume controls for paging, auxiliary source, loud ringing and background music. A contact closure or ringing line can activate loud ringing. Four electronic tones are available for loud ringing. Power supply included.

Model
PA-30

The **PA-30** also has inputs for a night transfer (loud ringing) on/off switch. The **PA-30** has a 600 Ohm output to drive additional amplifiers. Electronic switching eliminates pops and clicks.



## 60 Watt Power Amplifier

- Add 60 Watts of total paging power to two zones
- Drives up to (60) 8 Ohm or (100) 70V or 25V speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, 300AE, 25AE-70V, and 30AE-70V** (see page 22)

The **PA-60** boosts the power output of smaller paging systems by 60 to 100 speakers. Since each input has its own gain adjustment, one zone can be turned up louder for warehouse paging horn speakers, and the other zone can be turned down for office ceiling speakers.

Model
PA-60

The **PA-60** inputs are transformer coupled so they are floating and isolated. Connect to line level audio or direct to an existing paging amp output. Power supply included.



## 250 Watt / 70V High Power Paging Amplifiers

Viking's high power 250 Watt / 70V amplifiers can each drive up to (250) 70V speakers and/or paging horns. The **PA-250** connects to any type of analog telecom interface. The **PP-250** can connect to any line level audio source.

Model	Description
PA-250	Telecom Paging Amplifier
PP-250	Paging Power Amplifier

- Power supply included
- Compatible speakers: 70V paging horns and speakers, see page 22





## Anti-Feedback Paging Interface

- Eliminate the feedback “squeal” when paging
- Compatible with paging ports or trunk (FXO) ports
- High quality (80K/40K) digital message storage
- High output: 2V RMS into 600 Ohms
- Programmable paging features
- Power supply included



**HOW IT WORKS:** The “live” page is digitally recorded. When complete, the paging amplifier is activated and the page is replayed once or twice.

**Model**  
FBI-1A

## Handsfree Talk-Back Paging System

- Interface with unused trunk (FXO) ports, single line phones, and phone systems with a two-way paging port
- 3 Watts of paging power
- Page alert tone
- “Push-to-Talk” feature
- 28V DC talk battery
- Background music input
- 25-50 ft talk-back range



- Power supply included
- (1) 25AE Paging Horn included (page 22)

**Model**  
HF-3W

## Night Bell Over Existing Paging System

- Provide electronic warble tone over an existing paging system
- Powered by ring signal – no external power supply required
- Terminals for automatic switching between paging audio and warble tone
- Auxiliary relay contacts provided
- Connects to a CO line, analog station, or FXS port with RJ11 or terminals
- Floating 600 Ohm audio output



**Applications Include:** Offices, Clinics, Warehouses, Factories – anywhere people may be working after the receptionist goes home

**Model**  
K-600F

## Universal Telecom Paging Interface

The **FXI-1A** universal paging interface allows you to provide paging from virtually any type of phone system instead of from a microphone. You can also provide background music and electronic night bell over the paging system.

- Power supply included
- Select: FXO (loop start), FXS (ring trip) or paging port (VOX relay) interface mode
- 30V talk battery for use with an FXO port or unused trunk input



**Model**  
FXI-1A

- 600 Ohm paging output - mutes music during page

## Page Port / Trunk Input / FXO Paging Interface

Provides paging using phones (instead of a microphone) over a PA audio system. VOX relay contacts mute background music for phone systems that don't provide a paging contact (Panasonic®, S.W. Bell®, Intertel®, etc.). If a Paging Port is not available, use an unused trunk input or FXO port.

- Provides talk battery for connecting to an unused trunk input or FXO port
- Power supply included




**Model**  
PI-1A

- 600 Ohm output
- Night Bell
- VOX switching
- Mutes music

## Phone Line Powered Remote Access Device

The **RAD-1A** remote access device gives authorized users remote access to one way paging amplifiers, digital announcers, and other audio programs.

- Programmable security code and access code
- Separate 600 Ohm audio and telephone line output



**Model**  
RAD-1A

- Programmable call timer and silence time-out
- Relay contacts available for systems that need a dry contact closure


## Zone Paging Controller

- Switches line level signal to amplifiers
- Switches amplified signal to speakers
- Expand to 8 zones using 2 units
- All-call and group call patterns
- Balanced audio circuitry for low noise
- Input provided for background music

The **ZPI-4** paging system is capable of switching a line level signal (600 Ohms) to amplifiers or an amplified signal to 70V or 8 Ohm speakers. The **ZPI-4** features separate level controls for paging and background music (can be disabled on a per-zone basis). Also provided is a night bell with adjustable volume activated by a dry contact closure or a ringing analog PABX/KSU/FXS station.

**Model**  
ZPI-4

The **ZPI-4** is compatible with ringing analog PABX/KSU/FXS station ports as well as unused trunk/FX0 port inputs, and will interface directly with standard paging ports.

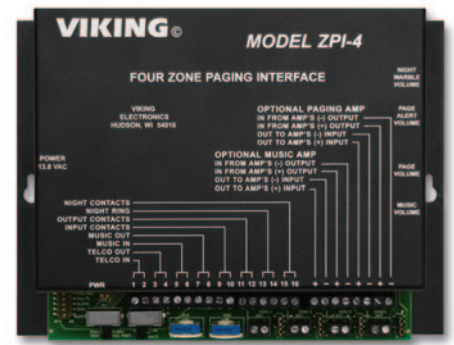

## Paging / Ringing Amplifier

- Amplify key phone paging and ringing
- Add speakers to loaded paging systems
- Adjustable volume control
- Powers up to (3) 8 Ohm speakers
- Screw terminal connections
- Power supply included
- One **25AE** Paging Horn included



**Model**  
M2W

## Tile Bridge

Use when mounting Viking ceiling speakers on 2' x 2' or 2' x 4' ceiling tiles



**Model**  
SA-TBA

Compatible Viking models:  
**30AE, 35AE, 40AE, 30AE-70V, 40-IP, 40TB-IP, SA-1S** (not included)

## 70 Volt Paging Speakers and Horns



- 25AE-70V:** 10 Watt 70 Volt compact paging horn
- 30AE-70V:** 10 Watt 70 Volt ceiling speaker, mounting hardware included
- 300AE:** 30 Watt 8 Ohm / 70 Volt paging horn for additional volume and voice intelligibility

Model	Description
25AE-70V	70 Volt Paging Horn
30AE-70V	70 Volt Ceiling Speaker
300AE	30 Watt 8 Ohm / 70 Volt Paging Horn

## 8 Ohm Paging Speakers and Horns



- 30AE:** 6 Watt 8 Ohm ceiling speaker, mounting hardware included
- 35AE:** 6 Watt 8 Ohm ceiling speaker with volume control and mounting hardware included
- 40AE:** 15 Watt 8 Ohm ceiling speaker with a modern look, excellent sound quality, and integral mounting system. Ideal for offices, reception areas, etc.
- 25AE:** 12 Watt 8 Ohm compact paging horn
- 300AE:** 30 Watt 8 Ohm / 70 Volt paging horn for additional volume and voice intelligibility

Model	Description
30AE	8 Ohm Ceiling Speaker
35AE	8 Ohm Ceiling Speaker with Volume Control
40AE	8 Ohm Modern Ceiling Speaker
25AE	12 Watt 8 Ohm Paging Horn
300AE	30 Watt 8 Ohm / 70V Paging Horn

## Clock Controlled Tone Generator

- Timed single, double, or triple bong or buzzer tones
- Alarm and standard NFPA/ANSI evacuation tones
- Programmable day of week, schedule 1, schedule 2, or off

Provide a paging system with up to 128 events in a 24 hour period in two separate schedules. Different alert tones may be used to indicate start or end of shift, break, lunch, etc. Dry contact closures can activate alarm, fire, evacuation, etc. sounds over paging.



**Model**  
CTG-1A

## Mass Notification Announcer

- Includes 10 different tones and 5 different user recorded messages
- Securely activate, reset, or live page from a remote phone
- Connect to a phone line, FXS/FXO port, PABX station, or trunk port

The **DNA-510** digital mass notification announcer provides up to 2 minutes of voice emergency instructions and alert tones over an existing paging system. The **DNA-510** will interrupt paging or background music and inject alert tones, emergency instructions, or live page over a paging system. Power supply included.



**Model**  
DNA-510

## Single Line Loud Ringers

The **SR-1** and **SRL-1** will generate loud ringing from an analog ringing line or from a dry contact closure. The **SRL-1** also provides bright flashing LED ring indication. There are 4 different ringing sounds to choose from. Loudness is easily adjusted with a volume control and test button.

- Ringing sounds: Warble, Double Gong, Quadruple Chime, Electronic Bell
- Use as a doorbell, a door open sensor, or a "Push for Assistance" button
- Adjustable volume with test button
- Power supply included



**SR-1**



**SRL-1**

Model	Description
SR-1	Ringer
SRL-1	Ringer with LED

## Add Paging and Door Chimes to Your Audio System

Both the **SLP-1** and **SLP-4** allow the user to page family members or co-workers from any phone in your home or small business. Pages are heard over the same speakers installed for multi-zone music distribution. Music is muted during the page and optionally during phone calls. Both units also provide inputs for lighted doorbell switches.

The **SLP-4** has inputs for 4 doorbell switches and allows you to choose between 8 different sounds or upload your own custom wav files, up to 6 minutes total.



**Model**  
SLP-1  
SLP-4

## Audio Isolation Board

Model **AIB-1** is a 1:1 isolation transformer that is designed to enable coupling between audio circuits. Speaker Level and Line Level inputs are available on screw terminals, an RCA jack, and a modular jack. The Line Level output is available on screw terminals and RCA jack.



**Model**  
AIB-1

## SIP Loud Ringer with LED

- Automatic Gain Control (AGC)
- SIP compliant
- PoE powered (class 2, < 6.5 Watts)
- Relay output
- Remote volume control from PC
- LED flashes for visual ring indication



**Model**  
SR-IP

## Self-Amplified Paging System

The **SA-25** Self-Amplified Paging control unit interfaces with a telecom or IP phone system with a paging port, an analog FXS, or FXO port. The system can provide background music from an external source and generate loud or night ringing from a ringing analog station or contact closure. The **SA-25** is backwards compatible with the older Legacy Valcom® and Bogen® 4-wire self-amplified speakers.



The **SA-25** can drive a combination of up to 25 self-amplified Viking 2-wire and/or older Legacy 4-wire self-amplified speakers. One **SA-IR** remote and power supply included.

**Model**  
SA-25

## Self-Amplified Accessories



Model	Description
SA-IR	Remote
SA-1S	Speaker
SA-1H	Paging Horn
SA-X12	Paging Adapter



**SA-1H**  
Remote Controlled Paging Horn




## Master Clock / Networked Clock Controlled Tone Generator

- Can be programmed to synchronize periodically with your network or internet time
- Can also be used as a Master Clock to synchronize Viking **CL Series** clocks
- Automatic daylight savings time and leap year correction

### Features:

- Up to 14 schedules and up to 1000 events
- 6 minutes of CD quality WAV file record time
- Pre-loaded with common school, business and factory alert tones or program with your own messages/tones over your network
- 4 inputs for triggering emergency fire evacuation, severe weather, lock down and all clear alert tones or messages
- RS-485 output for communicating time sync data when used with Viking **CL Series** wireless analog and digital clocks (below)

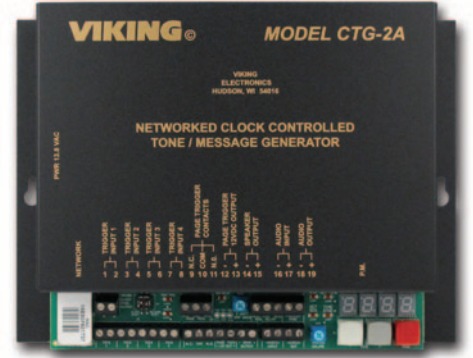

The **CTG-2A** is a networked clock controlled tone / message generator designed to provide accurately timed tones and/or messages over your existing paging system. This provides a cost effective way of signaling school period changes, factory shifts, breaks, lunch periods or providing messages at specific times for store sales, promotions, closing times, airport loading zones, etc. The **CTG-2A** can also be used as a master clock to automatically synchronize Viking **CL Series** clocks. The **CTG-2A** comes with programming software and an Ethernet port to allow PC programming of timed events, schedules, network or internet time synchronization, wave file transfer, message volume, daylight savings time, auxiliary relay control, etc. Power supply included.

**Model**  
CTG-2A

## Wireless Synchronized Clocks and Accessories

All clocks have built-in ¼ Watt repeaters capable of retransmitting the clock sync signal up to 500 ft in open space

Viking's Wireless Clock System provides reliable, accurately synchronized clocks for your entire facility. Eliminating dedicated clock wiring can save you thousands of dollars on installation and also allows for easy retrofitting. The system is comprised of a **CTG-2A** master clock, a **CL-RFT** clock RF transmitter, and Analog or Digital wireless clocks. The clocks will always display the correct time via updates from the **CTG-2A**.



### RF Transmitter / Repeater

The **CL-RFT** transmitter receives time sync data from the **CTG-2A** and transmits to the clocks via 915 to 928 MHz frequency hopping technology. Powerful 1 Watt (30dBm) output communicates up to 6,500 ft. in open space. It can also be configured as a repeater for larger spaces. No FCC license required. Dimensions 11" x 8" x 1.7".

Model	Description
CTG-2A	Master Clock
CL-A12	12" Analog Clock
CL-A16	16" Analog Clock
CL-D2	2.5" Digital Clock
CL-D4	4" Digital Clock
CL-DMA12	12" Double Mount (Analog)
CL-DMA16	16" Double Mount (Analog)
CL-DMD2	2.5" Double Mount (Digital)
CL-DMD4	4" Double Mount (Digital)
CL-RFT	RF Transmitter / Repeater
CL-SMD2	2.5" Surface Mount (Digital)
CL-SMD4	4" Surface Mount (Digital)
CL-WGA16	16" Wire Guard (Analog)
CL-WGD4	4" Wire Guard (Digital)



### Digital Clocks


Wireless bright digital clocks require 120V AC outlet (power supply included). The clocks are updated every minute from the **CTG-2A**. Viking offers a digital clock with a 2.5" tall display (**CL-D2**) and a 4" tall display (**CL-D4**). Shown with optional double mount bracket **CL-DMD2** or **CL-DMD4**.



### Analog Clocks

Wireless analog clocks are battery operated and require no wiring. Battery life using two D size Duracell Procell ® batteries is more than 5 years. The clocks are updated every 4 hours from the **CTG-2A**. Clocks can be located up to 6,500 ft. from the **CL-RFT** transmitter / repeater or up to 500 ft. from another synchronized clock.

Viking offers analog clocks in 12" diameter (**CL-A12**) and 16" diameter (**CL-A16**). Shown left with optional double mount bracket **CL-DMA12** or **CL-DMA16**.



### Wire Guards

Protect your 12" or 16" analog clock with a sturdy wire guard, model **CL-WGA16**.

Protect your digital clocks with model **CL-WGD4**.

**CAUTION: CL Series clocks cannot be used as stand alone clocks. They must be used in conjunction with a CTG-2 or CTG-2A master clock and one or more CL-RFT transmitters.**

## Loop Detector Board

The **LDB-1** provides a contact closure when used in series with telecom devices on an analog phone line. Analog PABX, CO line or FXS port powered. Optional **PS-2** power supply for switched power (sold separately).



### Model

LDB-1

## Line Powered Ringer

This auxiliary electronic ringer operates on any analog line that provides a minimum of 40 Volts 20-30 Hz AC ring voltage. Nominal 3 KHz warble provides up to 92 dB SPL @ 1 meter. The **LPR-1** can be connected via screw terminals or modular RJ-11 jack. A volume control and a 7 foot modular cord are provided. No power supply is required.



### Model

LPR-1

## Loop and/or Ring Detector

The **LDB-2** Ring /Loop Detector monitors an analog phone line for ringing and/or in use condition. Two sets of relay contacts are activated when these conditions are detected. When monitoring for ring, the relay can be adjusted to stay on steady or follow a ring cadence. A 12 V DC output is provided. Power supply included.



### Model

LDB-2

## Panasonic® Doorphone Station Adapter

The **PAN-1A** allows a Viking speaker phone (**E-10A, E-20B, E-30, E-35, E-40, E-50, E-60, E-65, E-70, E-75**, etc. pages 43 & 45) to be connected in place of Panasonic® KX-T30865 or KX-T7775. Power supply included.




### Model

PAN-1A

## Advanced Loop and/or Ring Detector

The **LDB-3** monitors an analog phone line, PABX or FXS line and provides a normally open or normally closed contact during ringing, off hook, or both. The unit can also provide a 12V DC 350 mA output for strobe lights.

The **LDB-3** can follow the ring cadence or stay on steady during ring. It can be set up not to activate from the "Info" button on two-button phones, ie: Viking model **E-1600-20A** (page 9). Power supply included.



### Model

LDB-3

## Multi-Tone Generator

The **MTG-10** can be connected to a paging source, phone system's paging port or background music. When a contact closure is provided to one of the inputs, the paging or background music is faded out and the appropriate tone is generated over the paging system. The siren and the evacuation whoop have priority and override any other tone.

The **MTG-10** can be configured to provide a tone every 15 seconds to notify callers that the call is being recorded. Power supply included.



### Model

MTG-10

## Time Delay Relay

The **TDR-1** can be programmed to produce one of 8 closure times from 0.5 to 20 seconds. It can also be set up as a delay on operate relay. The **TDR-1** accepts positive or negative-going logic level voltage or a contact closure.

Features selectable time delay and LED status indicator. Power supply included.



### Model

TDR-1

## CPC Disconnect

The **CPC-1** and **CPC-4** provide a momentary (1 second) break in the line current to signal telephone equipment the calling party has hung up. They generate the disconnect signal after detecting busy, fast busy, return to dial tone, or silence. Available in 1 line (**CPC-1**) and 4 line (**CPC-4**) models. Phone line powered.

### Model Description

CPC-1	1 Line
CPC-4	4 Line



## Amplified Remote Access Device

The **RAD-AMP** extends the usefulness of your phone system to remote employees, as well as providing call forwarding to remote employees or locations.

As a Telecommuting Extender, the **RAD-AMP** gives remote workers access to most PABX/KSU features from their home or cell phone.



As a Line Extender, the **RAD-AMP** provides authorized users remote access to PABX, Centrex or Electronic Key system features.

As a Call Diverter, the **RAD-AMP** provides call forwarding from one location to another.

**Model**  
RAD-AMP

## Door Bell Panels

The **DB40** Door Bell Button Panels permit the user to install a simple door bell button

- Fits any standard single gang box
- Panels made from durable plastic
- Weather resistant gasket included
- Screw terminals for easy wiring
- Available in dark brown or off-white



DB40-BN

DB40-WH

Model	Color
DB40-BN	Dark Brown
DB40-WH	Off-White

- Use with the Viking model **VE-3x5** enclosure for surface mounting, sold separately (page 33)

## Talk Battery and Ringing Power Supply

The **PS-48-RGA** power supply provides talk battery plus standard ring voltage where and when needed. The **PS-48-RGA** will provide telephone communication equipment with 48V DC talk battery, and will also produce 90V 20 Hz sine wave ring voltage rated up to 10 REN.



**Model**  
PS-48-RGA

## Speaker Volume Control

- Adjust the volume of individual paging horns, ceiling or wall speakers
- Compatible with Viking one-way 8 Ohm and/or 16 Ohm speakers
- Mounts in standard single gang electrical box
- Not recommended for two-way (talk-back) paging applications



**Model**  
SV-5W

## Toggle Switch

The **NS-1** is a simple on/off toggle switch mounted in a convenient plastic case. The **NS-1** can be used with Viking products that have a "Night Switch" input or any product that requires an external switch closure. The **NS-1** is easy to install almost anywhere: in a phone closet or at a front desk.



**Model**  
NS-1

The **NS-1** has 24" wires and comes with two quick connectors.

## Privacy Devices

Viking's Teleguard products protect the device that accesses the telephone line first by denying other Teleguard equipped devices access to the line until the call in progress has been terminated.



Model	Description
PC-7	Privacy Cord
PJ-14	Two Line Device
TG-1	For Punch Down Block

## We make it easy...

Replaceable parts for our products can be purchased securely through our online Spare Parts Store: <https://store.vikingelectronics.com/>

Don't see what you need?

Give us a call:


715-386-8861

SCAN TO VISIT THE SPARE PARTS STORE



## Telephone Line Toll Restrictor

- 0.5 to 49.5 minute call timer with disconnect
- 6-digit bypass code
- Allows emergency and toll free numbers
- Programmable to ignore phone system line access numbers
- Programmable allow or restrict table stores up to (40) 12-digit phone numbers, prefixes or area codes



**Model**  
TR-1





# Enhanced Weather Protection = EWP

## From SUN to SNOW We've got you covered!

Our Enhanced Weather Protection (EWP) is designed with total reliability in mind. First, we encase the entire board in a clear polymer material. This unique defense allows the circuit board and its components to expand and contract, while maintaining weather resistance.

Then we seal all external connections and use special push buttons, microphones, and speakers to shield against water penetration. If applicable, we use internally-sealed trim pots and switches so you can adjust mic and speaker volumes and set programming features right at the installation site.

Finally, we include closed cell foam gaskets to be installed behind face plates and special wire connectors filled with anti-corrosive sealing gel to protect your product from the elements.



### INTERNAL PROTECTION

Inside EWP products the circuit board is encased in a strong polymer material that protects sensitive electronics.



### ENDURES THE COLD

EWP products stand up to cold weather. (We test our products in Wisconsin and we know cold weather!)



### STOPS CORROSION

Corrosive locations such as near an ocean, parking garages, or indoor pool areas are extremely tough on electronics. EWP protects against corrosion from salt air, exhaust, chlorine, etc.



### DEFENDS FROM MOISTURE

The circuit board and other internal components are sealed from moisture and condensation.



### WITHSTANDS THE HEAT

EWP protects against soaring temperatures as well, humid or dry - we've got you covered.



### MEETS IP66 RATING

All these features, plus the gaskets that are included with the product, help make Viking's Enhanced Weather Protection compliant with an IP66 rating.

## Does your installation require EWP?


If you answer "YES" to any of the following statements, we recommend using a product with Enhanced Weather Protection.

- The product is located outside where it is exposed to precipitation or condensation.
- The product is exposed to high or low temperatures.
- The product is mounted near an indoor or outdoor swimming pool or spa.
- The product is mounted in an area with exposure to vehicle exhaust.
- The product wiring uses conduit which could funnel warm inside air to the product mounted outside, causing condensation on the circuit board.
- The product is mounted in a location with a known corrosive atmosphere.
- The temperature of the product can get below the dew point.

## TESTED to the EXTREME

We test all Viking products thoroughly, but we really push the limits of our products with Enhanced Weather Protection. We subject every EWP model to extreme temperatures and check for complete functionality.

We expose the EWP products to severely harsh conditions (Yes - the EWP circuit board shown left is working underwater!)

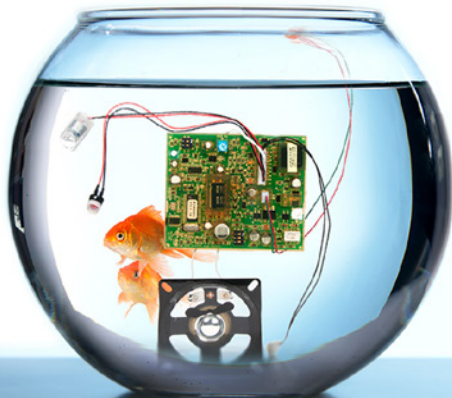

Watch what happens when we bury an E-1600A-EWP Emergency Phone in the snow!

## Want more info on EWP?

Scan below or go to:  
[vikingelectronics.com/ewp](http://vikingelectronics.com/ewp)



## Digital Voice Announcer with 7.5 Minutes of Record Time

- Built-in 2 Watt amplifier for use with speakers and horns
- AGC for recording from handset, tape, CD, PC soundcard, etc.
- 4 professional on-hold messages included
- Recording can be on-site or in a professional studio
- Three playback options
- Non-volatile memory
- Monitor recording from a standard handset
- 600 Ohm audio output for high wattage amplifiers
- Multiple message capabilities
- Auxiliary audio (MOH) input for background music between messages
- Remote trigger input for on-demand playback from a remote contact closure
- Press and hold playback mode



The **DVA-2WA** is a digital announcer / recorder with a built in 2 Watt amplifier. Designed to provide music and promotion on hold, the **DVA-2WA** can playback in a continuous loop or alternate between promotions and an auxiliary music source at 2 second to 30 minute intervals. Any number of multiple messages may be recorded.

The output of the **DVA-2WA** may also be connected directly to loudspeakers for repeated messages or played at the push of a button for museum displays, information booths, point of interest locations, retail applications, etc.

The **DVA-2WA**'s non-volatile memory eliminates the need for batteries or costly built in tape decks. This provides the convenience of recording at the shop or professional studio and then shipping to the installation site.

### Model

DVA-2WA

### Customer Favorite Applications:

Play **BRAHMS LULLABY** over a paging system to announce a new birth! For more information, see DOD 865.

Make **PUBLIC SAFETY** or **SOCIAL DISTANCING** announcements over paging systems. For more information, see DOD 951.

### Applications:

- On-Hold Promotion Messages and Background Music
- Message Repeater for: Airports, Museums, Moving Sidewalks, Information Displays, Car Rental, Amusement Parks, etc.

## 4 Port Automatic Call Routing Switch

The **FAXJ-1000** allows any business, large or small, to enjoy the convenience of automated data transmission without the perpetual monthly expense of a dedicated phone line.

The **FAXJ-1000** is a versatile phone / data / fax switch with the ability to automatically route calls via fax CNG tone, central office distinctive ring, or touch tones included in the dial string by the calling party. In addition, the **FAXJ-1000** offers full manual transfer capabilities.

The **FAXJ-1000** stores and retransmits caller ID information so that it is truly caller ID compatible.

- Four ports allow any four analog devices to share a single line
- Routes calls via CNG tone, distinctive ringing, touch tones sent by calling device or manually
- Provides realistic ring-back tones while re-ringing selected device
- Transfer incoming calls from one port to another as often as may be required during the same call
- Caller ID information is stored and retransmitted during transfer
- Automatic "privacy" eliminates interruptions on both inbound and outbound calls
- Monitors for calling party control (CPC)
- All in and outbound calls are routed to the phone 1 port during a power failure
- Manual mode will not interfere with CO provided voice mail
- Ports are balanced to prevent noise on long runs
- Compatible with high-speed modems
- Surge protection on both power and phone line
- Internal Call Mode



### Applications

- **Fax Machines:** Retail, Commercial, Industrial, Government, Home Office
- **Modem Terminals:** Computers, Vending Machines, Remote Access Applications
- **Point-of-Sale Terminals:** Fast Food Chains, Retail Stores, Convenience Stores

### Model

FAXJ-1000



## Two-Way Ringdown Circuit

- Compatible with fax machines and modem speeds up to 28.8 kbps
- Precise dial tone
- Switch selectable ring cadence
- Provides CPC breaks after hang-up on either port
- Switch selectable audio attenuation
- Can provide 2 seconds of precise dial tone before ringdown
- Provides ring back signal to calling device
- One or two way ring down capability
- Switch selectable ring count
- Ringdown and dial tone off mode (ideal for prison phone communications, etc.)
- 32V DC talk battery



The **DLE-200B** Line Simulator produces two way communication between standard telecom products such as modems, fax machines, Key Systems, PABX's and standard single line telephones. The Line Simulator can also provide sales people with a cost effective, easy to use method of conducting on site demonstrations, eliminating the need to locate phone lines and disrupt the customer's phone service.

### Applications

- Dedicated point-to-point communication
- Demonstrate and program equipment
- Prison phones
- Inter-system communication

#### Model

DLE-200B

The DLE-200B Line Simulator provides precise dialtone, DC talk battery and standard or distinctive ringing. The unit also provides a CPC break on hang up.

## Advanced Ringdown Circuit

- 911 mode for classroom training
- Provides name and number caller ID
- Touch tone detection or standard Ringdown
- Precise dial tone, ringback, busy, reorder, and S.I.T. tones
- Audio jack for amplified speaker or loading voice mail systems



The **DLE-300** simulates loop start phone lines and allows two-way communication between telecom devices or systems. It provides standard or distinctive ringing (6 REN) and 40V DC talk battery. Power supply included.

#### Maximum loop length per port:

6,864 feet using 24 gauge twisted pair

#### Model

DLE-300

## Power Fail Bypass Unit

Continue to receive your calls, even if the phone system is down. The **PF-6A** bypass unit connects 6 standard single line station phones directly to the CO lines. When the system is restored, calls in process will not be interrupted.



The **PF-6A** bypass unit will reconnect the phones to their station circuit only after they become idle. Power supply included. Model **PF-6A** operates when power is lost or on an alarm contact closure.

- Prevents busy signals or unanswered calls during power and system failures
- Loop or ground start
- Automatic ground start converter for outbound calls

#### Model

PF-6A

Subscribe to our **YouTube** channel!

- >> Product info
- >> Programming help
- >> Tech knowledge
- >> Industry trends


CHECK IT OUT >>>





## Blue Strobe / Beacon Kit

- High intensity long life LED technology
- 4 programmable flash patterns
- 6 programmable brightness settings
- Monitors analog lines for ringing and / or off hook or activate with a contact closure
- Program strobe to flash steady or follow ring cadence
- Use with Viking emergency phones (pages 8-12) or any analog phone



Replacement Lens Available in 5 Colors:




Visit the online **SPARE PARTS STORE**, see page 3 for info.

Model	Description
BLK-4	Standard model, for indoor use
BLK-4-EWP	Includes Enhanced Weather Protection

## Blue Strobe Light

- High intensity long life LED technology
- 4 programmable flash patterns
- 6 programmable brightness settings
- Requires 12V DC power



### Applications

- Noisy areas where visual status is required
- Signal personnel of equipment malfunctions
- Warn personnel they are entering a restricted area

Replacement Lens Available in 5 Colors:



Visit the online **SPARE PARTS STORE**, see page 3 for info.

Model	Description
SL-2	Standard model, for indoor use
SL-2-EWP	Includes Enhanced Weather Protection

## Line Powered Indication

The model **LPL-1** connects to any standard analog phone line to indicate "Ring" (visual flashing), "On the Phone" (steady on) or "Message Waiting" (fast flash) indication\*.

The large flashing LED can be seen up to 100 feet away. When used with a headset on an analog phone, you can end interruptions when associates don't realize you are on the phone. Phone line powered.

\*When installed on phone systems with standard 90V DC message waiting voltage.



Model
LPL-1

Note: Will not detect stutter dial tone (use model **VR-1B** right).

## Phone Status Indicator

**Bright 0.75" LED visible over 100 feet, power supply included**

**Analog Phones:** Flashing LED indicates "Ringing", steady LED indicates "On the Phone" and stutter flash indicates "Message Waiting" stutter dial tone is detected. Will also follow the cadence of 90-125V DC message waiting voltage.

**Electronic Phones:** Flashing LED eliminates guessing whose phone is ringing. Connect to electronic phone's speaker.

**Headsets:** Flashing LED ends interruptions by indicating that you are "On the Phone". Special T adapter provided.



Model
VR-1B

**Ideal for:** Telemarketing, Offices, Customer Service, Message Waiting, Cubicles, Technical Support, etc.

Lose a screw? Need another cord?  
Can't find your power supply?

## WE GOT YOU COVERED!

Replaceable parts for our products can be purchased securely through our online Spare Parts Store:

<https://store.vikingelectronics.com/>

Don't see what you need?

Give us a call:

715-386-8861

SCAN TO VISIT THE  
SPARE PARTS STORE



## Message Waiting Light Retrofit Kit

- Operates on standard 80-150V DC message waiting voltage
- Fully modular for quick plug-in installation
- Blinks on message waiting or ringing
- LED visible for 50 feet
- Compatible with nearly any telephone system
- Use as a ring indicator in office settings



Model
LM-1A

Note: Will not detect stutter dial tone (use model **VR-1B** above).

## Ring Shape Conditioner and Power Booster

Viking's Ring Boosters are designed to reshape and increase the ringing power of an existing analog line, PABX extension, FXS port, IP phone system analog port or any other telecom device which provides ringing. The units duplicate the incoming ring cadence, allowing compatibility with custom ringing features.

Each line is capable of ringing four 1 REN or eight 0.5 REN telephones and does not affect normal operation of the telephone line or features, such as distinctive ring, caller ID, call waiting, hookswitch flash features, CPC signaling, etc. Viking offers four sizes to fit many different applications.

- True Sine wave ring signal output
- Boosts ring to 4 REN per line
- Caller ID compatible
- Reshapes troublesome square wave ringing
- Will not affect normal line operation
- Model **RG-224** connects directly to CISCO® VG224



RG-4



RG-204



RG-224

Model	Description
RG-4	1 Line - Wall Mount
RG-204	4 Lines - Wall Mount
RG-224	24 Lines - Rack Mount

### Ring Booster

- Boosts ring power to 12 REN
- Ring up to 12 additional phones
- Caller ID compatible
- Easy modular installation
- Compatible with distinctive ringing services



- Will not affect normal line operation
- Reshapes troublesome square wave ringing
- Capable of boosting talk battery and loop current

Model
RG-10A

### Talk Battery Booster

The **TBB-1B** will boost talk battery and loop current on a single analog PABX station, CO line or VoIP ATA FXS port.

This is helpful for powering line powered devices, such as dialers and emergency phones on low voltage and/or loop current extensions and X-10 wireless phone jacks.

- Screw terminal connections for easy installation
- Boost loop current to 26mA
- Boost talk battery to 48V DC
- Power supply included



Model	Price
TBB-1B	\$73

### Long Loop Adapters

Viking's Long Loop Adapters extend analog station loop length to 30,000 feet. The **LLA-1** and **LLA-4** provide long line and off premise extension (OPX) capabilities for PABX and KSU analog stations, ISDN terminal adapters, channel banks, etc. The units are compatible with pulse dialing, touch tone dialing, hook switch flash features, CPC signaling, and Caller ID features. A ground screw terminal allows for improved surge protection and connection to an earth ground reference for the regenerated line.

- Convert an analog KSU/PABX station to a standard voltage OPX
- Provides 48V DC talk battery
- Provides 20 Hz, 10 REN sine wave ringing
- Electrically isolates PABX station from extended loop



LLA-1 (Replacement for Proctor® model 46222)

Model	Description
LLA-1	1 Line
LLA-4	4 Lines



LLA-4 (Replacement for Proctor® model 46224)

## VE-5x5 Series Surface Mount Boxes



The **VE-5x5 Series** of surface mount boxes add vandal and weather resistance to many of Viking's 5" x 5" flush mount entry phones and emergency phones.


- Surface mount to a wall, post, single or double gang electrical box

- Finishes: Heavy duty steel with black, red, white or yellow powder coating or brushed stainless steel

- Compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 33)

Model	Finish	Description
VE-5x5	Black	1.0" Rain Guard
VE-5x5-RD	Red	1.0" Rain Guard
VE-5x5-SS	Stainless	1.0" Rain Guard
VE-5x5-WH	White	1.0" Rain Guard
VE-5x5-YL	Yellow	1.0" Rain Guard
VE-5x5-NR	Black	No Rain Guard
VE-5x5-NR-RD	Red	No Rain Guard
VE-5x5-NR-SS	Stainless	No Rain Guard
VE-5x5-NR-WH	White	No Rain Guard
VE-5x5-NR-YL	Yellow	No Rain Guard

## VE-5x5-PNL Series Blank Panel Boxes

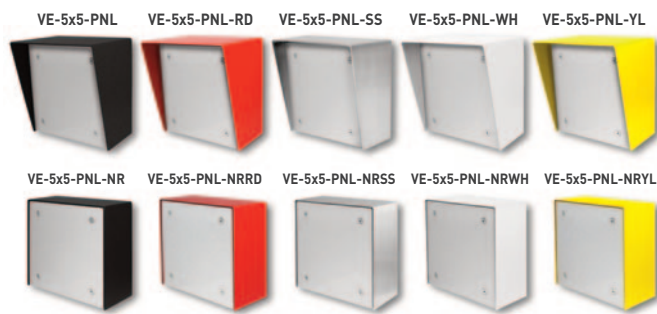

The **VE-5x5-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder

coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-5x5-PNL Series** can be used with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 33 for more info).

Model	Finish	Description
VE-5x5-PNL	Black	1.0" Rain Guard
VE-5x5-PNL-RD	Red	1.0" Rain Guard
VE-5x5-PNL-SS	Stainless	1.0" Rain Guard
VE-5x5-PNL-WH	White	1.0" Rain Guard
VE-5x5-PNL-YL	Yellow	1.0" Rain Guard
VE-5x5-PNL-NR	Black	No Rain Guard
VE-5x5-PNL-NRRD	Red	No Rain Guard
VE-5x5-PNL-NRSS	Stainless	No Rain Guard
VE-5x5-PNL-NRWH	White	No Rain Guard
VE-5x5-PNL-NRYL	Yellow	No Rain Guard

## VE-6x7 Series Surface Mount Boxes

The **VE-6x7 Series** of surface mount boxes add vandal and weather resistance to Viking's **K-1700 Series** analog entry phones and **K-1700-IP Series** VoIP entry phones (page 37).

- Finishes: Heavy duty steel with black powder coating or brushed stainless steel
- Surface mount to a wall, post, single or double gang electrical box
- Compatible with Viking's **VE-GNP** gooseneck pedestals (page 33)



Model	Finish	Description
VE-6x7	Black	1.0" Rain Guard
VE-6x7-SS	Stainless	1.0" Rain Guard
VE-6x7-NR	Black	No Rain Guard
VE-6x7-NR-SS	Stainless	No Rain Guard

## VE-6x7-PNL Series Blank Panel Boxes

The **VE-6x7-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-6x7-PNL Series** are compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 33).



Model	Finish	Description
VE-6x7-PNL	Black	1.0" Rain Guard
VE-6x7-PNL-SS	Stainless	1.0" Rain Guard
VE-6x7-PNL-NR	Black	No Rain Guard
VE-6x7-PNL-NRSS	Stainless	No Rain Guard



## VE-5x10 Series Surface Mount Boxes

The **VE-5x10 Series** of surface mount boxes add vandal and weather resistance to any of Viking's 5" x 10" flush mount analog or IP phones.

- Finishes: Heavy duty steel that is primer powder coated then top coated with textured black or available in brushed 316 marine grade stainless steel
- Surface mount to a wall, post, single or double gang electrical box
- Compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see below for more information)



Model	Finish	Description
VE-5x10	Black	1.0" Rain Guard
VE-5x10-SS	Stainless	1.0" Rain Guard
VE-5x10-NR	Black	No Rain Guard
VE-5x10-NR-SS	Stainless	No Rain Guard

## VE-5x10-PNL Series Blank Panel Boxes

The **VE-5x10-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-5x10-PNL Series** is compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see below for more information).



Model	Finish	Description
VE-5x10-PNL	Black	1.0" Rain Guard
VE-5x10-PNL-SS	Stainless	1.0" Rain Guard
VE-5x10-PNL-NR	Black	No Rain Guard
VE-5x10-PNLNRSS	Stainless	No Rain Guard

## VE-3x5 Surface Mount Box

The **VE-3x5** surface mount box adds versatility to Viking's **E-40** or **E-50 Series** Entry Phones (page 45).

- Heavy duty steel
- UV stable black fine texture powder paint
- Surface mount to a wall, post, or single gang electrical box



**Model**  
VE-3x5

## Accessories

### VE-LIGHT

Add bright LED illumination to any doorbox or entry phone that is housed in a Viking surface mount box with a rain guard.

### VE-RMB

Attaches to the plastic junction box supplied with some Viking doorboxes and entry phones. It provides a means of mounting even when no wall stud or support beam is accessible.



Model	Description
VE-LIGHT	LED Kit
VE-RMB	Retrofit Kit

## Gooseneck Pedestals

The gooseneck pedestals are designed to be used with select Viking surface mount boxes. Ideal for drive up communications, the gooseneck pedestals are constructed of heavy duty black powder painted steel or stainless steel.

Pad mount to a floor or concrete with 4 available bolt holes or use the **VE-GNP-IG** to mount in-ground or in wet cement.

**VE-GNP-IG**  
Black Finish  
In-Ground

**VE-GNP-2**  
Black Finish  
Dual Height  
Pad Mount

**VE-GNP**  
Black Finish  
Pad Mount

**VE-GNP-SS**  
Stainless Steel  
Pad Mount

Model	Height
VE-GNP	42"
VE-GNP-SS	42"
VE-GNP-IG	64"
VE-GNP-2	42"/72"

### E-1600A-MK-GNP

Mounting kit for attaching the **E-1600A** and **E-1600-IP** Emergency Phones to a Viking gooseneck pedestal.



**Model**  
E-1600A-MK-GNP



## Enclosures for Installing Products Outdoors

### Added Protection for Viking Emergency Phones, Entry Phones, Doorboxes or other devices

The **VE-9x12** series of outdoor enclosures provide the ultimate in weather protection for your Viking product or other device.

The **VE-9x12** enclosures are constructed of durable UV stable polycarbonate / ABS composite to provide years of outdoor service. The heavy-duty doors are labeled "Telephone" and have a gasket seal to keep out even the harshest weather. The **VE-9x12** allows you to choose from three internal adapter panels that allow mounting many different Viking products.

Models **VE-9x12R-0P**, **VE-9x12Y-0P**, and **VE-9x12B-0P** come without an internal adapter panel, ideal for mounting non-Viking equipment or the new **E-1600-912** Emergency Phone (page 10). These enclosures are available in all three colors and include a separate "Telephone" label.

#### Applications Include:

- Parking Lots
- Maintenance Areas
- Hospitals
- Playgrounds
- Swimming Pools
- Building Exteriors
- Campuses
- Roadside Help Areas
- Fueling Stations

Model	Color	Description
VE-9x12R-0P	Red	Enclosure with No Adapter Panel
VE-9x12R-1P	Red	Enclosure with Adapter Panel 1
VE-9x12R-2P	Red	Enclosure with Adapter Panel 2
VE-9x12R-3P	Red	Enclosure with Adapter Panel 3
VE-9x12Y-0P	Yellow	Enclosure with No Adapter Panel
VE-9x12Y-1P	Yellow	Enclosure with Adapter Panel 1
VE-9x12Y-2P	Yellow	Enclosure with Adapter Panel 2
VE-9x12Y-3P	Yellow	Enclosure with Adapter Panel 3
VE-9x12B-0P	Black	Enclosure with No Adapter Panel
VE-9x12B-1P	Black	Enclosure with Adapter Panel 1
VE-9x12B-2P	Black	Enclosure with Adapter Panel 2
VE-9x12B-3P	Black	Enclosure with Adapter Panel 3



VE-9x12R-0P

VE-9x12Y-0P

VE-9x12B-0P

- Designed to meet NEMA / EEMAC Type 4 / 4X / 12 requirements
- Constructed of heavy-duty UV stable polycarbonate / ABS composite with flame-retardant UL 94 V-0 rating
- Drip guard and gasket sealed door
- 0.020" thick stamped aluminum "Telephone" label with scratch resistant UV stable clear coat
- Mounting holes for standard RJ11 wall plate available on adapter panel 1
- Optional **VE-SPG** door return hinge spring available
- Optional **VE-PBL** push button lock and key set available
- Adapter panels are also available for purchase separately



### NEW Emergency Phone Fits in Viking Enclosures

These panel phones are specifically designed to fit seamlessly within Viking's VE-9x12 Enclosures. Ideal for both indoor and outdoor swimming pool areas, or any location requiring a protected emergency phone.

For more info on this Emergency Phone, see page 10.

Phone shown in Red Enclosure (VE-9x12R-0P) sold separately



## Enclosure Accessories

**VE-PBL:** Push button lock and key set for any **VE-9x12** enclosure.

**VE-SPG:** Hinge door return spring for use with the **VE-9x12**.

**VE-9x12MK-1:** Internal adapter panel 1 for the **VE-9x12**.

**VE-9x12MK-2:** Internal adapter panel 2 for the **VE-9x12**.

**VE-9x12MK-3:** Internal adapter panel 3 for the **VE-9x12**.

Model	Description
VE-PBL	Push Button Lock
VE-SPG	Door Return Spring
VE-9x12MK-1	VE-9x12 Internal Adapter Panel 1
VE-9x12MK-2	VE-9x12 Internal Adapter Panel 2
VE-9x12MK-3	VE-9x12 Internal Adapter Panel 3



VE-9x12MK-1  
Internal adapter panel 1 for VE-9x12



VE-9x12MK-2  
Internal adapter panel 2 for VE-9x12



VE-9x12MK-3  
Internal adapter panel 3 for VE-9x12



VE-PBL  
Push button lock and key set

VE-SPG  
Hinge door return spring



## Door Entry and Camera Controller

The **C-1000B** allows single line phones or phone systems to share a phone line with one or two Viking **W-Series** doorboxes. The **C-1000B** provides two touch tone controlled relays to operate door strikes or gate openers and provides doorbox triggered CCTV camera switching. Viking doorboxes can be used on single line residential or home office applications as well as on fully loaded systems, when used with a **C-1000B**.

- Allows two Viking **W-Series** doorboxes to share a single telephone line with a residential or business telephone system
- Custom ringing mode to distinguish doorbox calls from CO calls
- Provides (2) touch tone controlled SPDT relay contacts (5 Amp rating) for door strikes or gate openers
- Calls can be placed on hold when visitors call from the doorbox
- Doorbox triggered CCTV camera switching
- Call waiting tones indicate which doorbox is calling and distinguish a doorbox call from a CO line call
- Built-in talk battery for "No CO Line" applications
- Compatible with Viking's Single Line Paging Controllers, model **SLP-1** or **SLP-4** (page 23)
- Keyless entry/postal lock input
- Auxiliary contact output for doorbell, light, etc.



Compatible with one or two of these Viking doorbox models (see below):

- |                    |                   |
|--------------------|-------------------|
| <b>W-1000</b>      | <b>W-3000</b>     |
| <b>W-1000-EWP</b>  | <b>W-3000-EWP</b> |
| <b>W-2000A</b>     | <b>W-3005</b>     |
| <b>W-2000A-EWP</b> | <b>W-3005-EWP</b> |

### Model

C-1000B

## Analog Handsfree Doorboxes

Viking's handsfree doorboxes are available in four different chassis configurations and are designed to interface directly with an unused trunk input/FXO port of a phone system. One or two doorboxes can also share an existing phone line when used with a **C-1000B** doorbox controller. When the "Call" button is pressed, the doorbox generates a standard or custom ring cadence.

### Answer Your Door or Gate from Any Phone in Your Home or Business

- Connect to a phone system's unused trunk input, FXO port or a Viking **C-1000B** controller (above)
- Blue LED call progress/night light on **W-1000**, **W-3000** and **W-3005**
- High output speaker/amplifier with volume adjustment
- Adjustable microphone volume
- 40V DC talk battery
- 20 Hz ring generator (6.0 REN ring load maximum)
- Selectable ring cadence and number of rings
- Selectable "Push-to-Talk" feature for noisy environments
- Operating temperature range: -15°F to 130°F
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating, see page 27
- **W-3005** features a built-in analog color video camera with wide viewing angle and tilt/swivel adjustments
- **W-3005** can use one CAT 5e cable for audio and video transmission

Model	Description	EWP	Camera
W-1000	Flush Mount Black Doorbox		
W-1000-EWP	Flush Mount Black Doorbox	•	
W-2000A	Surface Mount Doorbox		
W-2000A-EWP	Surface Mount Doorbox	•	
W-3000	Flush Mount Stainless Steel Doorbox		
W-3000-EWP	Flush Mount Stainless Steel Doorbox	•	
W-3005	Flush Mount Stainless Steel Video Doorbox		•
W-3005-EWP	Flush Mount Stainless Steel Video Doorbox	•	•



### W-1000

**Faceplate:** Vandal resistant louvered aluminum with weather resistant black textured powder paint.

**Mounting:** Flush mount or use an optional Viking Surface Mount Box sold separately (page 32).



### W-2000A

**Chassis:** Impact resistant, UV stable light grey plastic with black UV stable printed graphics.

**Mounting:** Surface mount to a single gang box or a 4x4 junction box.



### W-3000

**Faceplate:** Vandal resistant louvered 316 marine grade stainless steel with #4 brushed finish and laser etched graphics.

**Mounting:** Flush mount or use an optional Viking Surface Mount Box sold separately (page 32).



### W-3005

**Faceplate:** Vandal resistant louvered 316 marine grade stainless steel with #4 brushed finish and laser etched graphics.

**Mounting:** Flush mount or use an optional Viking Surface Mount Box sold separately (page 32).



## 12 Button Entry Phones with Built-In Directories

### Features

- Analog or VoIP models
- 12 buttons speed dial up to 20 digits each, with 12 rollover numbers
- Easy one button push operation
- Integrated relays for door strike and camera control
- Built-in custom tenant directory
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating
- Flush mount with the included zinc plated steel rough-in box
- Optional Surface Mount Boxes available (page 33, sold separately)
- Heavy-duty louvered 316 marine grade stainless steel faceplate
- Permanent laser etched graphics
- Heavy duty sealed metal keypad
- T-10 Torx security mounting screws

### Analog Models

- Interface to a CO line, analog PABX station, or FXS port
- Hangs up on CPC, busy, silence, time-out or dial tone
- Operates on 12-24V AC/DC (12V DC adapter provided)
- 50 keyless entry codes
- Selectable auto-answer feature for monitoring
- Postal lock input
- Touch tone restriction from microphone
- Use with model **C-1000B** (page 35) for increased security
- Compatible with model **C-3000** (page 39) for "No CO" (phone line) operation
- Operating temperature: -30° F to 150° F

### VoIP Models

- SIP compliant and PoE powered (class 2, <6.5 Watts)
- Two sets of SPDT 2 Amp relay contacts for camera or door / gate control
- Blue "Call / Status" LED indicator
- Automatic Noise Canceling (ANC) feature for proper operation in noisy environments
- Network downloadable firmware
- Program up to 1,000 keyless entry codes and/or proximity card numbers
- Keyless entry codes and proximity numbers can be programmed to only allow access at specific times and/or days of the week
- Event logging with time and date stamp
- Hangs up on busy, time-out or touch tone command
- Remotely programmable
- Programmable microphone and speaker volume
- Selectable auto-answer feature for monitoring
- Operating temperature: -40°F to 140°F

Model	Analog	VoIP	EWP	Camera	Proximity
K-1200	•				
K-1200-EWP	•		•		
K-1200-IP		•			
K-1200-IP-EWP		•	•		
K-1205	•			•	
K-1205-EWP	•		•	•	
K-1205-IP		•		•	
K-1205-IP-EWP		•	•	•	
K-1270	•				•
K-1270-EWP	•		•		•
K-1270-IP		•			•
K-1270-IP-EWP		•	•		•
K-1275	•			•	•
K-1275-EWP	•		•	•	•
K-1275-IP		•		•	•
K-1275-IP-EWP		•	•	•	•

### K-1200 Series



- Entry phone with built-in 12 button keypad
- Brushed stainless steel finish

### K-1205 Series



- Built-in analog color video camera
- 420 lines of resolution and 80° viewing angle
- Tilt and swivel adjustment

### K-1270 Series



- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (page 38)


### K-1275 Series



- Built-in analog color video camera
- Built-in proximity reader
- Compatible with Viking proximity credentials (page 38)

## Compact Analog Color Video Camera Kits

The **VCAM-1** features tilt and swivel adjustment, stainless steel mounting hardware, potted circuit board, 12V DC adapter/wire connections.



The **VCAM-1IR** is designed to be used with IR illuminators (not included).

### Model

VCAM-1

VCAM-1IR

## Single Gang Analog Video Camera

- Fits in a standard single gang box
- Wide viewing angle
- Enhanced Weather Protection (EWP)
- Power supply included
- Replacement faceplates available
- Compatible with **VE-3x5** Surface Mount Box (page 33)

### Model Description

VCAM-2-SS Stainless Camera Panel

VCAM-2-BN Bronze Camera Panel

PNL-VCAM-2-SS Stainless Faceplate only

PNL-VCAM-2-BN Bronze Faceplate only



## Handsfree Entry Phones with Built-In Keypads

### Features

- Analog or VoIP models
- Two finishes: Brushed Stainless Steel or Oil Rubbed Bronze (BN)
- Enhanced Weather Protection (EWP) models available
- Blue "Call / Status" LED indicator
- Flush mount with the included zinc plated steel rough-in box
- Optional Surface Mount Boxes available for all models on this page (see page 32, sold separately)
- Louvered stainless steel faceplate
- Permanent laser etched graphics on stainless steel models
- Stainless steel "Call" button
- Heavy-duty sealed keypad
- T-10 Torx security mounting screws

### Analog Models

- Telephone line powered
- Interface to a CO line, analog PABX station, or FXS port
- Advanced call progress detection: disconnects on busy signal, return to dial tone, CPC, reorder tone, call time-out, and 40 second silence time out
- Auto-answer feature for monitoring
- Selectable push button disconnect
- Adjustable mic and speaker volume
- Programmable VOX (microphone / speaker) switching speed
- Operating temperature: -20°F to 130°F

#### Compatible Viking Controllers

- C-500 (page 42)
- C-4000 (page 39)
- C-2000B (page 42)
- K-1900-3 (page 39)
- C-3000 (page 39)
- SRC-1 (page 41)

### VoIP Models

- Two sets of 2 Amp relay contacts for door / gate control
- SIP compliant and PoE powered (class 2, <6.5 Watts)
- Automatic Noise Canceling (ANC) feature for proper operation in noisy environments
- Network downloadable firmware
- Speed dial up to 250 numbers
- Cycles to rollover number on busy or no-answer
- Program up to 1,000 keyless entry codes and/or proximity card numbers
- Keyless entry codes and proximity card numbers can be programmed to only allow access at specific times and days of week
- Event logging with time and date stamp
- Remotely programmable
- Programmable microphone and speaker volume
- Operating temperature: -40°F to 140°F

#### Controller Built-in

Model	Finish	Analog	VoIP	EWP	Camera	Proximity
K-1700-3	Stainless	•				
K-1700-3-EWP	Stainless	•		•		
K-1700-3-BN	Bronze	•				
K-1700-3-BN-EWP	Bronze	•		•		
K-1700-IP	Stainless		•			
K-1700-IP-EWP	Stainless		•	•		
K-1700-BN-IP	Bronze		•			
K-1700-BN-IPEWP	Bronze		•	•		
K-1705-3	Stainless	•			•	
K-1705-3-EWP	Stainless	•		•	•	
K-1705-3-BN	Bronze	•			•	
K-1705-3-BN-EWP	Bronze	•		•	•	
K-1705-IP	Stainless		•		•	
K-1705-IP-EWP	Stainless		•	•	•	
K-1705-BN-IP	Bronze		•		•	
K-1705-BN-IPEWP	Bronze		•	•	•	
K-1770-IP	Stainless		•			•
K-1770-IP-EWP	Stainless		•	•		•
K-1770-BN-IP	Bronze		•			•
K-1770-BN-IPEWP	Bronze		•	•		•
K-1775-IP	Stainless		•		•	•
K-1775-IP-EWP	Stainless		•	•	•	•
K-1775-BN-IP	Bronze		•		•	•
K-1775-BN-IPEWP	Bronze		•	•	•	•

### Surface Mount Options

The **VE-6x7 Series** (page 32) of surface mount boxes add vandal and weather resistance to the **K-1700 Series** and **K-1700-IP Series** entry phones. Surface mount boxes can be used with **Gooseneck Pedestals** (page 33).



### K-1700 Series

- Entry phone with built-in keypad.
- Stainless steel model (left) shown in optional **VE-6x7** Surface Mount Box (see page 32, sold separately)



### K-1705 Series

- Built-in analog color composite video camera
- 420 lines of resolution and 80° viewing angle
- Tilt and swivel adjustment



### K-1770 Series

- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (see page 38)



### K-1775 Series

- Built-in analog color video camera
- 420 lines of resolution and 80° viewing angle
- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (see page 38)

## 125 KHz Proximity Reader

- Standard 26-bit Wiegand interface
- Use with Viking **PRX-C, PRX-C-ISO, PRX-FOB, LRT-4**, certain legacy HID® proximity protocols\* and certain AWID 125KHz proximity protocols\*\*
- Comes with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating
- Compact size mounts to mullion / door frame



**Model**  
PRX-1

## Mullion Mount Proximity Reader with Keypad

- Read range of up to 6 inches
- Reader Format: 26-bit Wiegand
- Keypad formats: 26-bit Wiegand and 8-bit burst
- Use with Viking **PRX-C, PRX-C-ISO, PRX-FOB, LRT-4**, certain legacy HID® proximity protocols\* and certain AWID 125KHz proximity protocols\*\*



**Model**  
PRX-5

- Comes standard with Enhanced Weather Protection (EWP)

## Keypad with Proximity Reader

- Reader format: 26-bit Wiegand
- Keypad formats: 26-bit Wiegand and 8-bit burst
- Use with Viking **PRX-C, PRX-C-ISO, PRX-FOB, LRT-4**, certain legacy HID® proximity protocols\* and certain AWID 125KHz proximity protocols\*\*
- Comes with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating



**Model**  
PRX-2

## Proximity Cards and Fobs

- No magnetic strip to wear out
- No batteries
- **PRX-C** is credit card size with slot
- **PRX-C-ISO** is thinner and more flexible
- No minimum quantities



**Model**  
PRX-C  
PRX-C-ISO  
PRX-FOB

## High Performance Proximity Reader

- Read range of up to 16 inches
- Standard 26-bit Wiegand interface
- Use with Viking **PRX-C, PRX-C-ISO, PRX-FOB, LRT-4**, certain legacy HID® proximity protocols\* and certain AWID 125KHz proximity protocols\*\*
- Comes with Enhanced Weather Protection (EWP)
- Surface mounts to non-metallic wall, post, or single gang electrical box



Mounts to an optional Viking gooseneck pedestal (page 33) with a **PRX-3-MK-GNP** or **PRX-3-MK-VEGNP** mounting kit (sold separately)

**Model**  
PRX-3  
PRX-3-MK-GNP  
PRX-3-MK-VEGNP

## Long Range 4 Channel Transmitter and Receiver

- Up to 400 ft range (line of sight)
- Convenient key fob design
- 4 buttons to activate up to 4 Wiegand devices
- Secure, Rolling Code + Encryption, digital, anti-playback wireless transmission
- Integrated 125KHz proximity module for close range access credential (model **LRT-4**)



**Model**  
LRR-4  
LRT-4

LRR-4 LRT-4

## Wiegand Keypad

- Slender aluminum housing for mullion mounting
- Pigtail leads
- Beeper and bi-color LED shows status
- Standard 26-bit Wiegand interface
- Dimensions: 7.1" x 1.7" x 0.5"
- Designed for outdoor use, the **PRX-4** comes standard with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating (see page 27 for EWP info)



**Model**  
PRX-4

## Proximity / Entry Controller

- 1 door with up to 250 users
- Use with a card reader or keypad
- Standard 26-bit Wiegand interface
- Program with a touch tone phone
- Output for data logging
- Power supply included



**Model**  
ES-1

\* HID and the HID logo are registered trademarks of HID Global Corporation, an ASSA ABLLOY company. All other trademarks are the property of their respective owners.  
\*\* AWID is a trademark of Applied Wireless Identification Group.



## Apartment / Office Entry Controller

The **K-1900-3** converts any touch tone phone into a multi-number auto dialer that will store up to 250 telephone numbers.

When a call initiated by the **K-1900-3** is answered by an apartment or business tenant, a built-in relay contact may be activated to control an electric gate or door strike. Up to 250 keyless entry codes may also be programmed.

- Stores 250 tenant touch tone phone numbers and keyless entry codes
- DPDT relay for controlling door strikes, magnetic locks, gates, etc.
- Multi-number dialer mode (kiosks, etc.)
- Ring-thru mode for calling the entry phone
- Auxiliary relay input to trigger a timed relay activation for postal locks, etc.
- Power supply included

### Model

K-1900-3

### Commonly Used with:

K-1700-3  
K-1705-3  
K-1900-8  
or any touch tone phone



## No CO Line Entry Controller

Eliminates the monthly expenses of an entry phone line and CO "call waiting" feature on tenant's lines. The **C-3000** rings the tenant's phone or provides call waiting tones. The tenant can "buzz" the visitor in from their touch tone phone. Power supply included.

- Functions with or without tenant CO lines
- Supports two entry points and 12 tenants
- Expands to 96 tenants by adding more units (each **C-3000** adds 12 additional tenants)

### Model

C-3000

### Commonly Used with:

AES-2000 K-1205 K-1900-8  
AES-2005 K-1700-3 or any touch tone phone  
K-1200 K-1705-3



## 4 Door Entry Controller

The **C-4000** converts any four touch tone phones into multi-number auto dialers that will store up to 250 telephone numbers. When a call initiated by the **C-4000** is answered by an apartment or business tenant, a built-in relay may be activated to control an electric gate or door strike.

- Supports 4 entry points
- Supports 4 Wiegand devices
- Stores 250 tenant touch tone phone numbers and 250 entry codes
- Remote or local touch tone programmable
- Programmable relay activation code
- Programmable master entry code and maintenance personnel entry codes
- DPDT relay for controlling door strikes, magnetic locks, gates, etc.
- Power supply included

### Model

C-4000

### Commonly Used with:

K-1700-3  
K-1705-3  
K-1900-8  
or any touch tone phone



## Name Directories

Model	Description
D6	6 Names
D10	10 Names
D22	22 Names
D32	32 Names
D44	44 Names
D56	56 Names

Viking's vandal-resistant directories are an easily installed, high-quality line of displays, designed specifically to complement newly installed or existing secure-building entry systems.

All models feature both weather and vandal resistant construction. The **D-Series** directories are durably constructed from brushed stainless steel to match the style of Viking's stainless steel phones.



## Accessible Entry System


### Usable by people with sensory and physical impairments

The Accessible Entry System is a hands-free phone with a built in auto-dialer, which will allow access to apartment/office buildings by using analog telephone service. In order to assist people of varying abilities, the directory is displayed on the LCD screen and an audible announcement can be played.

The system is housed behind a marine grade 316 stainless steel panel with metal keypad and control buttons. Power supply included.

- Supports up to 525 tenant names and phone numbers
- Data logging
- Door strike contacts
- Postal lock input
- Remote recording and programming
- Designed to help meet ADA requirements
- Compatible with Viking's proximity readers (page 38)
- Model **AES-2005S** and **AES-2005F** also feature a built-in color video camera
- **PB-100** required for programming (see below)

Model	Description	Analog	Camera
AES-2000S	Surface Mount Entry System	•	
AES-2000F	Flush Mount Entry System	•	
AES-2005S	Surface Mount Entry System with Camera	•	•
AES-2005F	Flush Mount Entry System with Camera	•	•
ERAM-4M	Expansion Memory		

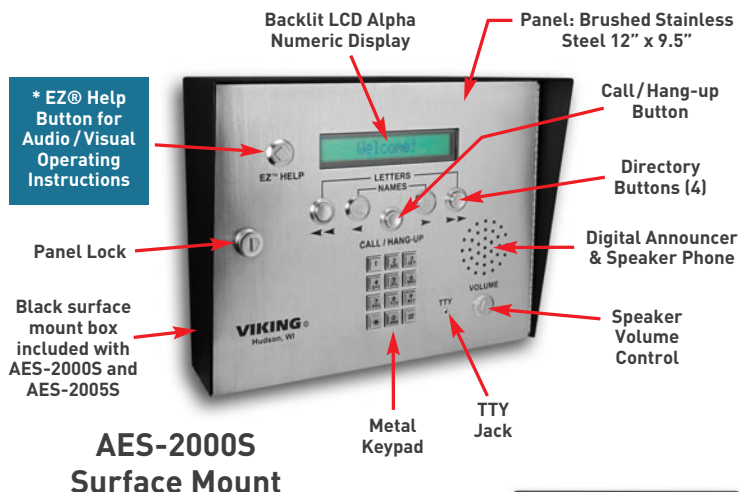

**AES-2000S**  
Surface Mount

\*EZ® and EZ Access® are registered trademarks of the Wisconsin Alumni Research Foundation (<https://trace.umd.edu/ez>)

**AES-2000F**  
Flush Mount

Mounting bezel and back box included



### Applications Include:

- Apartment/Office Buildings
- Assisted Living Residences
- Nursing Homes
- Gated Communities
- Hospitals
- Public Housing

## Add Entry Points to the AES Models

Add up to 32 additional points of entry to the Viking **AES-2000** Accessible Entry System. The **ES-3** operates a door strike or magnetic lock upon receiving valid credentials from a Wiegand device. One **ES-3**, one Wiegand device, and a door strike or magnetic lock of your choice is required for each additional entry point.

- Two wire CAN communication protocol can be daisy-chained together
- Share with a door strike's 12-24V AC or DC power source
- Power supply included

**Model**  
ES-3



## PC to Phone Line Interface

The **PB-100** connects to a serial or USB port on your PC and also to an analog phone line. The **PB-100** accepts ASCII commands to seize the phone line, watch for busy, and to send and receive touch tones or data. If the PC is equipped with a sound card, the audio input and output can be coupled to the phone line.

Software downloads are available to do emergency phone polling, **AES-2000** programming, and hotel/motel wake up dialer. Power supply included.

**Model**  
PB-100



- Remote programming of **AES-2000** Entry System (above)
- Hotel / Motel wake up applications
- Updated emergency phone polling / programming application with new features for use with Viking Emergency Phones (page 7)

## Secure Remote DTMF Controller

- Touch tone programmable
- Programmable relay activation code
- 32 programmable keyless entry codes
- Operates on any 12-24V AC/DC power source
- Postal lock input provided
- Power supply included

When a call initiated by the **SRC-1**'s entry device is answered, a built-in relay may be activated to control an electric gate or door strike. The **SRC-1** is fully user programmable and prevents unauthorized access through the entry device.



**Model**  
SRC-1

The **SRC-1** can be used with any of Viking's analog entry phones and doorboxes.

## Remote Controller for 1 Relay

- Programmable access code
- Easy installation
- Selectable relay operation times
- Normally open or normally closed relay

The **RC-2A** provides remote relay operation from any standard touch tone telephone and can be installed either locally or remotely. For local installations the **RC-2A** can be installed in parallel on any analog communications path, such as analog CO lines or analog PABX/FXS stations and will passively monitor for touch tone commands.



**Model**  
RC-2A

For off-premise applications, the **RC-2A** will answer analog CO lines or PABX/FXS stations after a selectable ring delay. Then the **RC-2A** can be activated to allow remote relay operation. Power supply included.

## Remote Controller for 3 Relays

- Operational commands can be customized to 1, 2 or 3 digits in length
- Relay interrogation tones
- Programmable relay times
- Cascade up to three **RC-3** units to control up to nine relays

The **RC-3** enables a standard touch tone phone to control up to 3 maintained ON, maintained OFF, or momentary relay contacts from a remote location. The **RC-3** is fully user programmable and uses non-volatile memory.



**Model**  
RC-3

Up to three units can be daisy chained on the same line to control up to nine relays. The **RC-3** features switchable 32V DC talk battery allowing easy installation on a trunk / FXO port. The unit can be connected directly to a CO line or analog PABX/FXS station. Power supply included.

## Network Enabled Relay Controller

- Notification by email or text message of sensor input state change
- Can be used as a secure remote relay for Viking VoIP phones
- Ready-to-use webpage control interface
- Encrypted login
- Relay names, input names, and input status can be customized on webpage

The **RC-4A** provides networked control of four relays via an easy-to-use web interface. The same interface can be used to check the status of four contact inputs. Relays can be toggled on or off, or user-programmed timed closures can be activated. The **RC-4A** can be configured to work as a remote relay for Viking IP phones, controlling door strikes and gates when a remote relay is required for security reasons. It can also be programmed to send an email or text message in response to a change in one or more of the sensor inputs.



**Model**  
RC-4A

Two units can be set up so that activity on a sensor input of one unit will automatically activate one of the relays on the other unit. Power supply included.



## Single Entry Phone Interface

### Allows House Phones or a Phone System to Share a Phone Line with One Viking Entry Phone

The **C-200** allows a single line telephone or a telephone system to share a phone line with a single Viking entry phone. When a visitor presses the call button on the entry phone, the resident's phone rings. The resident can then answer and converse with the visitor prior to manually allowing entry. If the resident is already on a call, the **C-200** provides a "Call Waiting" tone. The resident can then "hook flash" their phone which puts the call on hold while they converse with the visitor. Power supply included.

**Model**  
C-200

**Compatible with:** All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.



## Single Entry Phone/Relay Controller with Call Forwarding

- 5 Amp door strike or gate control relay
- Immediate call forward mode
- Built in 5 number dialer (1-20 digits)
- No CO mode

The **C-250** allows single line phones or a phone system to share a phone line with a Viking entry phone. When the entry phone initiates a call, the **C-250** provides a double ring. If there is no answer, the **C-250** controller can dial up to 5 numbers to connect the entry phone call to a cell phone or guard station.

Visitors may be buzzed in with a 1 or 2 digit touch tone command. The **C-250** also allows residents to monitor the entry phone and has a postal lock input. Power supply included.

**Model**  
C-250

**Compatible with:** All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.



## Two Entry Phone/Relay Controller with Call Forwarding

- No CO mode
- Analog station mode
- Immediate call forward mode
- 6 keyless entry codes per door
- Programmable Caller ID (to local phones only)
- Expandable to 4 controllers for up to 8 entry phones

The **C-500** allows single line phones or a phone system to share a phone line with two Viking entry phones. When the entry phone initiates a call, the **C-500** provides distinctive ring. If there is no answer, the controller can dial up to 5 numbers to connect the entry phone call to a cell phone or guard station. Visitors may be buzzed in with a 1 or 2 digit touch tone command. The **C-500** allows residents to monitor either phone and features two trigger inputs, 5 Amp door strike or gate opener contacts and programmable entry phone caller ID. Power supply included.

**Model**  
C-500

**Compatible with:** All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.



## Four Entry Phone/Relay Controller

- Analog station dial through mode for apartment or office entry applications
- Provides 6 different keyless entry codes per door and 6 master codes for use at any door
- Codes can be set as permanent or "1 time" use
- Provide 4 unique CD quality door chimes plus whole house paging when used with the Viking **SLP-4** (page 23)
- Programmable Caller ID (local phones only)
- Programmable relay activation code

Answer and open up to 4 doors or gates from your nearest phone. The **C-2000B** can provide a double ring and/or caller ID to indicate which entry phone is calling. If you are on a call, the controller provides call waiting tones and caller ID. You can place the existing call on hold, talk to the visitor, then return to the original caller. The unit can ring up to 16 phones. Programmable "Privacy Number" eliminates prank calls from the entry phone. The **C-2000B** allows the user to monitor any entry phone with auto answer capability. Power supply included.

**Model**  
C-2000B

**Compatible with:** All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.



## Analog Speaker Phones with Dialers



**E-30**

Standard vandal-resistant door entry phone



**E-32**

Door entry phone that mounts in a double gang box



**E-30-PT**

Door entry phone with "Push-to-Talk" button for noisy areas



**E-35**

Door entry phone with built-in analog video camera

- Telephone line powered
- Heavy-duty marine grade 316 stainless steel faceplate with brushed finish
- Faceplate dimensions: 5.0" x 5.0"
- Remotely programmable
- Selectable auto-answer feature allows remote monitoring
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Interface to a CO line, analog PABX station, or FXS port
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out

- Program to dial up to 5 numbers on busy or ring-no-answer
- Programmable maximum call length
- Operating temperature: -30°F to 150°F
- E-32 flush mounts in a standard double gang box (not included)
- Flush mount models **E-30**, **E-30-PT**, and **E-35** with the included rough-in box
- Optional surface mount boxes available (sold separately), see page 32

**E-30** shown in optional **VE-5x5** surface mount box



- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating

Model	Analog	EWP	Camera
E-30	•		
E-30-EWP	•	•	
E-32	•		
E-32-EWP	•	•	
E-35	•		•
E-35-EWP	•	•	•
E-30-PT	•		
E-30-PT-EWP	•	•	

## Analog Speaker Phones



**E-10A**



**E-10-WHA**



**E-20B**

**E-10A** and **E-10-WHA**: Heavy-duty aluminum faceplate, flush mount with the included rough-in box or use an optional surface mount box (sold separately), see page 32

**E-20B**: Impact resistant, UV stable, light grey plastic chassis with black UV stable pad printed graphics, surface mount only

- Telephone line powered
- Button will place or hang-up a call
- Faceplate dimensions: 5.0" x 5.0"
- Adjustable mic and speaker volume
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out

- Selectable auto-answer feature allows remote monitoring
- Programmable maximum call length
- Programmable VOX (mic/speaker) switching speed
- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating

Model	Analog	EWP
E-10A	•	
E-10A-EWP	•	•
E-10-WHA	•	
E-10-WHA-EWP	•	•
E-20B	•	
E-20B-EWP	•	•

## VoIP Entry Phones

- Easy one button push operation
- 2 Amp relay contacts for door / gate control
- SIP compliant
- PoE powered (class 1, <4 Watts)
- Remotely programmable
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Network downloadable firmware
- Polling / programming software downloads available
- Program to dial up to 5 numbers on busy or ring no answer
- Hangs up on busy, time-out, or touch tone #
- Operating temperature: -40°F to 140°F
- Programmable maximum call length
- Auto-answer for remote monitoring
- Adjustable mic and speaker volume
- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating, see page 27
- Optional Surface Mount Boxes available (sold separately), see page 32

Model	Finish	VoIP	EWP	Camera
E-10-IP	Black	•		
E-10-IP-EWP	Black	•	•	
E-20-IP	Gray	•		
E-20-IP-EWP	Gray	•	•	
E-30-IP	Stainless	•		
E-30-IP-EWP	Stainless	•	•	
E-32-IP	Stainless	•		
E-32-IP-EWP	Stainless	•	•	
E-35-IP	Stainless	•		•
E-35-IP-EWP	Stainless	•	•	•
E-60-BK-IP	Black	•		
E-60-BK-IP-EWP	Black	•	•	
E-60-BN-IP	Bronze	•		
E-60-BN-IP-EWP	Bronze	•	•	
E-60-SS-IP	Stainless	•		
E-60-SS-IP-EWP	Stainless	•	•	
E-60-WH-IP	White	•		
E-60-WH-IP-EWP	White	•	•	



**E-10-IP**

Heavy-duty black aluminum faceplate, flush mount



**E-20-IP**

Impact resistant UV stable light gray plastic chassis, surface mount only



**E-30-IP**

Heavy-duty brushed 316 stainless steel faceplate, flush mount



**E-32-IP**

Stainless steel faceplate, flush mount in a standard double gang box



**E-35-IP**

Built-in analog video camera, flush mount stainless steel faceplate



**E-60-SS-IP**

Available finishes: black, brushed stainless, oil rubbed bronze, and white

## Touch-Free VoIP Entry Phones

The **E-20TF-IP**, **E-30TF-IP** and **E-32TF-IP** Touch-Free VoIP Entry Phones are equipped with Viking's touchless motion sensor. A simple wave over the sensor will activate a call. Touch-Free calling eliminates the exposure to germs and bacteria from typical push button switches.

Model	Finish	VoIP	EWP
E-20TF-IP	Gray	•	
E-20TF-IP-EWP	Gray	•	•
E-30TF-IP	Stainless	•	
E-30TF-IP-EWP	Stainless	•	•
E-32TF-IP	Stainless	•	
E-32TF-IP-EWP	Stainless	•	•



**E-20TF-IP**



**E-30TF-IP**



**E-32TF-IP**

- Adjustable touch-free motion sensor
- SIP compliant
- PoE powered (class 1, <4 Watts)
- 2 Amp relay contacts for door or gate control
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Remotely programmable
- Network downloadable firmware
- Program to dial up to 5 numbers on busy or ring no answer
- Hangs up on busy signal, time-out or touch tone command



## Analog Single & Double Gang Speaker Phones

Model	Finish	Analog	EWP	Camera	Proximity
E-40-BK	Black	•			
E-40-BK-EWP	Black	•	•		
E-40-BN	Bronze	•			
E-40-BN-EWP	Bronze	•	•		
E-40-SS	Stainless	•			
E-40-SS-EWP	Stainless	•	•		
E-40-WH	White	•			
E-40-WH-EWP	White	•	•		
E-50-BK	Black	•		•	
E-50-BK-EWP	Black	•	•	•	
E-50-BN	Bronze	•		•	
E-50-BN-EWP	Bronze	•	•	•	
E-50-SS	Stainless	•		•	
E-50-SS-EWP	Stainless	•	•	•	
E-50-WH	White	•		•	
E-50-WH-EWP	White	•	•	•	
E-60-BK	Black	•			
E-60-BK-EWP	Black	•	•		
E-60-BN	Bronze	•			
E-60-BN-EWP	Bronze	•	•		
E-60-SS	Stainless	•			
E-60-SS-EWP	Stainless	•	•		
E-60-WH	White	•			
E-60-WH-EWP	White	•	•		
E-65-BK	Black	•		•	
E-65-BK-EWP	Black	•	•	•	
E-65-BN	Bronze	•		•	
E-65-BN-EWP	Bronze	•	•	•	
E-65-SS	Stainless	•		•	
E-65-SS-EWP	Stainless	•	•	•	
E-65-WH	White	•		•	
E-65-WH-EWP	White	•	•	•	
E-70-BK	Black	•			•
E-70-BK-EWP	Black	•	•		•
E-70-BN	Bronze	•			•
E-70-BN-EWP	Bronze	•	•		•
E-70-SS	Stainless	•			•
E-70-SS-EWP	Stainless	•	•		•
E-70-WH	White	•			•
E-70-WH-EWP	White	•	•		•
E-75-BK	Black	•		•	•
E-75-BK-EWP	Black	•	•	•	•
E-75-BN	Bronze	•		•	•
E-75-BN-EWP	Bronze	•	•	•	•
E-75-SS	Stainless	•		•	•
E-75-SS-EWP	Stainless	•	•	•	•
E-75-WH	White	•		•	•
E-75-WH-EWP	White	•	•	•	•

- Telephone line powered
- Available in 4 different finishes
- Vandal resistant 304 stainless steel faceplate
- Interface to a CO line, analog PABX station, or FXS port
- Blue LED helps locate the push button, as well as indicate ringing and off-hook
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time-out
- Remotely programmable call length timer, silence timer, and VOX (mic / speaker) switching speed
- Adjustable mic and speaker volume
- For applications requiring the unit to dial, add an external dialer [see page 17]
- Auto-answer feature for monitoring
- Operating temperature: -30° F to 150° F
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating, see page 27
- Optional Surface Mount Boxes available (see pages 32-33, sold separately)
- **E-40/E-50** single gang compact size dimensions: 4.88"H x 3.13"W x 1.8"D
- **E-60/E-65/E-70/E-75** double gang compact size dimensions: 4.88"H x 4.94"W x 1.7"D



### E-40 Series

- Vandal resistant 304 stainless steel faceplate
- Flush mounting in a standard single gang box
- Optional **VE-3x5** surface mount box (page 33)
- Replacement faceplates available in all finishes

**E-40-SS** shown (Brushed Stainless Steel finish)



### E-50 Series

- Built-in color composite video camera
- Audio and video transmission on one CAT 5e cable
- Flush mounting in a standard single gang box
- Camera power supply included
- Replacement faceplates available in all finishes

**E-50-BN** shown (Oil Rubbed Bronze finish)



### E-60 Series

- Durable 304 stainless steel faceplate
- Flush mount in a standard double gang box
- Shown in optional **VE-5x5** Surface Mount Box (page 32)
- Shown with optional **VE-LIGHT** (page 33)
- Replacement faceplates available

**E-60-SS** shown in **VE-5x5** Surface Mount Box (sold separately)



### E-65 Series

- Built-in color composite video camera
- Audio and video transmission on one CAT 5e cable
- Camera power supply included
- Optional Surface Mount Boxes (page 32)
- Replacement faceplates available

**E-65-BN** shown (Oil Rubbed Bronze finish)



### E-70 Series

- Built-in 125KHz compatible 26-bit Wiegand proximity reader, see page 38 for additional compatible Viking products
- Flush mount in a standard double gang box
- Optional Surface Mount Boxes (page 32)
- Replacement faceplates available

**E-70-WH** shown (Satin White finish)



### E-75 Series

- Built-in color composite video camera
- Audio and video transmission on one CAT 5e cable
- Built-in 125KHz compatible proximity reader (see page 38)
- Optional Surface Mount Boxes (page 32)
- Replacement faceplates available

**E-75-BK** shown (Textured Black finish)

## IP Intercoms with HD Video



**X-35-SS**

Marine Grade 316 Stainless Steel with #4 Brushed Finish



**X-35-BN**

Oil Rubbed Bronze Powder Painted Stainless Steel




**X-35-BK**

Textured Black Powder Painted Stainless Steel

The **X-35 Series** of IP Video Intercoms are a feature-rich solution designed to deliver high-definition video and dependable voice communication via SIP VoIP phone systems, cloud providers, or third party apps.

The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-35** intercoms are available with Enhanced Weather Protection (EWP).

- Privacy-focused design - choose your own SIP and NVR solutions
- No forced cloud services or subscriptions
- SIP compliant for seamless integration
- ONVIF Profile S compliant to ensure compatibility 
- Supports H.264 and MJPEG video encoding
- Up to 1080p SIP video calling
- Separate NVR stream with two-channel audio
- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay contacts for door / gate control
- Power-over-Ethernet (class 2, < 6.5 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

- Heavy-duty stainless steel chassis
- Flush mount in a standard double gang box (not included)
- Optional surface mount boxes available (sold separately), page 32

Model	Finish	VoIP	EWP	Camera
X-35-SS	Stainless	•		•
X-35-SS-EWP	Stainless	•	•	•
X-35-BN	Bronze	•		•
X-35-BN-EWP	Bronze	•	•	•
X-35-BK	Black	•		•
X-35-BK-EWP	Black	•	•	•

## IP Emergency Phones with HD Video




**X-1605**

Steel with Durable High-Visibility Powder Paint



**X-1605-32**

Marine Grade 316 Stainless Steel with #4 Brushed Finish

- Choose your own SIP and NVR solutions - no forced cloud services or subscriptions
- SIP compliant
- ONVIF Profile S 
- H.264 and MJPEG video encoding
- Separate NVR stream with audio

- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay output contacts
- PoE (class 2, < 6.5 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

- **X-1605:** Surface mount
- **X-1605-32:** Flush mount in a standard double gang box (not included) or use an optional surface mount box (sold separately), see page 32

The **X-1605 Series** of IP Video Emergency Phones are designed to provide HD video and reliable handsfree voice communication for SIP VoIP phone systems, cloud providers, or third party apps. The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

The **X-1605** emergency phones can dial programmable numbers and automatically cycles through backup phone numbers in case of a busy signal or no answer. Convenient remote programming via a web-based UI, eliminating the need for a dedicated app. On-board 2 Amp relay contacts are provided for activating door strikes or gate controllers. The **X-1605** emergency phones will flash the red LED during dialing and can automatically light the LED when the call is answered.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-1605** emergency phones are available with Enhanced Weather Protection (EWP).

Model	Finish	VoIP	EWP	Camera
X-1605	Red	•		•
X-1605-EWP	Red	•	•	•
X-1605-32	Stainless	•		•
X-1605-32-EWP	Stainless	•	•	•

## Compact IP Intercoms with HD Video



**X-205-SS**

Brushed Stainless Steel Finish



**X-205-BN**

Oil Rubbed Bronze Finish



**X-205-BK**


Textured Black Finish

The compact and sleek **X-205 Series** offers a feature-rich solution designed to deliver high-definition video and dependable voice communication via SIP VoIP phone systems, cloud providers, or third party apps.

The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

This versatile intercom system supports programmable number dialing and automatically cycles through backup phone numbers in case of a busy signal or no answer. Remote configuration via a user-friendly built-in Web UI, eliminating the need for a dedicated app.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-205** intercoms are available with Enhanced Weather Protection (EWP).

- Attractive low-profile stainless steel chassis
- Privacy-focused design - choose your own SIP and NVR solutions
- No forced cloud services or subscriptions
- SIP compliant for seamless integration
- ONVIF Profile S compliant to ensure compatibility 
- Supports H.264 and MJPEG video encoding
- Up to 1080p SIP video calling
- Separate NVR stream with audio
- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay contacts for door / gate control
- PoE powered (class 2, < 6.5 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

- Surface mount to a standard single gang electrical box (not included), or mount directly to a wall or flat sided post

Model	Finish	VoIP	EWP	Camera
X-205-SS	Stainless	•		•
X-205-SS-EWP	Stainless	•	•	•
X-205-BN	Bronze	•		•
X-205-BN-EWP	Bronze	•	•	•
X-205-BK	Black	•		•
X-205-BK-EWP	Black	•	•	•

## IP Intercom Secure SIP and Web UI

The **E-32T Series** of IP Intercoms are designed to provide reliable and secure voice communication for SIP VoIP phone systems, cloud providers, or third party apps. SIP transport over TLS to provide a higher level of security and compatibility with SIP providers. The built-in Web User Interface allows for programming and configuration from any operating system with a web browser.

The **E-32T Series** intercoms can dial programmable numbers and automatically cycle through backup phone numbers in case of a busy signal or no answer.



**E-32T-SS-IP**

Brushed Stainless Steel Finish

Model	Finish	VoIP	EWP
E-32T-SS-IP	Stainless	•	
E-32T-SS-IP-EWP	Stainless	•	•

**This is just the beginning...**

- >> New models
- >> Added features
- >> Different designs
- >> Expanded applications
- >> More options!

Be **FIRST** to learn **WHAT'S NEW** with the **X-SERIES** >>





# VIKING

VIKING ELECTRONICS, INC.  
1531 INDUSTRIAL STREET  
HUDSON, WI 54016-9386

ADDRESS SERVICE REQUESTED

## WHERE TO BUY

**ADI**  
800.233.6261 | adiglobaldistribution.us

**JENNE**  
800.422.6191 | jenne.com

**WESCO / ANIXTER**  
800.323.8167 | anixter.com

**TELEDYNAMICS**  
800.847.5629 | teledynamics.com

**GRAYBAR**  
800.472.9227 | graybar.com

**TARGET DISTRIBUTING**  
800.873.5528 | targetd.com

**HALL TELECOMMUNICATIONS**  
800.265.2667 | halltel.com

**GOLDCOM**  
800.788.8848 | goldcom.us

**HIGH-TECH COMMUNICATIONS**  
800.256.3010 | high-techcomm.com

**REXEL**  
888.739.3577 | rexelusa.com

**ALARM PRODUCTS DISTRIBUTORS**  
800.783.1552 | apdlink.com

**POWER & TEL**  
800.238.7514 | ptsupply.com

**KGPCO**  
800.328.5142 | kgpco.com

**WALKER & ASSOCIATES, INC.**  
800.925.5371 | walkerfirst.com

**BOETTCHER SUPPLY**  
800.657.5770 | boettchersupply.com

**LONE STAR SYSTEMS SUPPLY**  
210.888.5522 | lonestar-us.com

**VOIP SUPPLY**  
800.398.8647 | voipsupply.com

**888 VOIP**  
888.864.7786 | 888voip.com

**HB DISTRIBUTION**  
818.882.0000



## CONTACT US

VIKING ELECTRONICS, INC.  
Call: 715.386.8861  
vikingelectronics.com  
info@vikingelectronics.com

OUTSIDE THE USA/CANADA CONTACT:  
VIKING INTERNATIONAL +1.715.386.3794  
vikinginternational@vikingelectronics.com