

VIKING 2026

SECURITY AND COMMUNICATION

KEEPING YOU
CONNECTED &
PROTECTED!

A woman wearing a silver Viking helmet with two prominent horns. She is holding a large, ornate shield that is red with black stripes and features a black horned Viking head in the center. The shield has a metallic rim and a circular boss. Her eyes are visible through the eye holes of the helmet.

MADE IN
USA

THANK YOU for choosing **VIKING**

Since 1969, we've been proudly designing, building, and supporting communication and security solutions right here in Hudson, Wisconsin. Keeping our manufacturing local lets us maintain tight quality control, respond quickly to customer needs, and continue the tradition of solid, dependable craftsmanship that's been part of Viking from the beginning.

Choosing products **MADE IN THE USA** isn't just about where something comes from - it's about knowing it's built with care, durability, and pride. Every piece of equipment that leaves our doors reflects the hard work and dedication of the people who make it, and we're grateful for the chance to keep building products our customers can count on.

Most of all, we want to say **THANK YOU** to our customers. Whether you've been with us for decades or are just discovering Viking, your trust means everything to us. Your support helps keep high-quality American manufacturing going strong, and we're truly grateful for you.

Thanks again for choosing Viking Electronics and for believing in American-made quality. We look forward to continuing to serve you with the reliable, innovative products you've counted on for more than 50 years.



Online Spare Parts Store

We are making it easier for you! Replaceable parts for our products can be purchased securely through our online Spare Parts Store: <https://store.vikingelectronics.com/>

Call us with questions or to order over the phone:
715-386-8666

SCAN TO VISIT THE
SPARE PARTS STORE >>



TWO-YEAR WARRANTY

We know you choose Viking because nothing gets the job done better. Looking for another reason? Our **Two-Year Limited Warranty**. We stand behind our products because we put the customer first.

Learn more about the Viking warranty here:
vikingelectronics.com/warranty-information/

Software & Firmware

To keep you up to date, software and firmware downloads are available on our website: <https://vikingelectronics.com/product-support/>

Viking Device Manager (VDM) is a software application that enables the discovery, management, configuration, and updating of multiple Viking IP devices. Learn more about VDM on page 18.

Call us with questions: 715-386-8666



FREE AMERICAN PRODUCT SUPPORT

When you need **Product Support**, we won't outsource your call. We're right here in Hudson, Wisconsin and you'll talk directly with one of our many experienced in-house tech gurus. Available to those servicing or installing a Viking product. Product Support resources offered:

- >> Online Support Forum
- >> Personalized Support Tickets
- >> Call to talk with a Technician directly

Learn more about Viking Product Support:
vikingelectronics.com/product-support/



STAY CONNECTED

>> Follow us on your favorite social media:



>> Watch new product launches, demos, training videos, and more on YouTube:
youtube.com/c/VikingElectronicsWI



GET THE LATEST NEWS

>> We don't like spam!

>> Get the latest Viking news and info delivered to your inbox once a month!



HOW TO CONTACT US

Call: 715.386.8861

Fax: 715.386.4344

info@vikingelectronics.com

www.VikingElectronics.com

PRODUCT INDEX by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
22TB-IP	20	DB40-BN	27	E-1600-53-IPEWP	10	E-1600-RDA-EWP	8	Model	Page
25AE	23	DB40-WH	27	E-1600-54A	11	E-1600-RD-IP	8	E-50-BN	45
25AE-70V	23	DLE-200B	30	E-1600-54-IP	11	E-1600-RD-IPEWP	8	E-50-BN-EWP	45
300AE	23	DLE-300	30	E-1600-55A	11	E-1600-RT-IPEWP	10	E-50-SS	45
300-IP	20	DNA-510A	24	E-1600-55A-EWP	11	E-1600-RTMIPEWP	10	E-50-SS-EWP	45
300-IP-EWP	20	DVA-2WA	29	E-1600-55-IP	11	E-1600-SSA	8	E-50-WH	45
300TB-IP	20	E-10A	43	E-1600-55-IPEWP	11	E-1600-SSA-EWP	8	E-50-WH-EWP	45
300TB-IP-EWP	20	E-10A-EWP	43	E-1600-60A	8	E-1600-SS-IP	8	E-60-BK	45
30AE	23	E-10-IP	44	E-1600-60A-EWP	8	E-1600-SS-IPEWP	8	E-60-BK-EWP	45
30AE-70V	23	E-10-IP-EWP	44	E-1600-60-IP	8	E-1600-TP2IPEWP	10	E-60-BK-IP	44
35AE	23	E-10-WHA	43	E-1600-60-IPEWP	8	E-1600-TP-IPEWP	10	E-60-BK-IP-EWP	44
40AE	23	E-10-WHA-EWP	43	E-1600-65A	8	E-1600-YLA	8	E-60-BN	45
40-IP	19	E-1600-02A	9	E-1600-65A-EWP	8	E-1600-YLA-EWP	8	E-60-BN-EWP	45
40TB-IP	20	E-1600-02A-EWP	9	E-1600-65-IP	8	E-1600-YL-IP	8	E-60-BN-IP	44
AIB-1	24	E-1600-02-IP	9	E-1600-65-IPEWP	8	E-1600-YL-IPEWP	8	E-60-BN-IP-EWP	44
ARS-DLB100	13	E-1600-02-IPEWP	9	E-1600-912A	10	E-20B	43	E-60-SS	45
ARS-DRB100	13	E-1600-03B	9	E-1600-912A-EWP	10	E-20B-EWP	43	E-60-SS-EWP	45
ARS-IB100	13	E-1600-03B-EWP	9	E-1600-912-IP	10	E-20-IP	44	E-60-SS-IP	44
ARS-TB100	13	E-1600-03-IP	9	E-1600-912IPEWP	10	E-20-IP-EWP	44	E-60-WH	45
BLK-4	31	E-1600-03-IPEWP	9	E-1600A	8	E-20-IP-IP	44	E-60-WH-EWP	45
BLK-4-EWP	31	E-1600-20A	9	E-1600A-AST2EWP	11	E-20TF	44	E-60-WH-IP	44
C-1000B	36	E-1600-20A-EWP	9	E-1600A-AST-EWP	11	E-20TF-IP	44	E-60-WH-IP-EWP	44
C-200	42	E-1600-20-IP	9	E-1600A-BLT2EWP	11	E-30	43	E-65-BK	45
C-2000B	42	E-1600-20-IPEWP	9	E-1600A-BLT-EWP	11	E-30-EWP	43	E-65-BK-EWP	45
C-250	42	E-1600-22-IP	9	E-1600A-EWP	8	E-30-IP	44	E-65-BN	45
C-3000	40	E-1600-22-IPEWP	9	E-1600A-GT-EWP	10	E-30-IP-EWP	44	E-65-BN-EWP	45
C-4000	40	E-1600-30A	9	E-1600A-MK-GNP	34	E-30-PT	43	E-65-SS	45
C-500	42	E-1600-30A-EWP	9	E-1600A-RT-EWP	10	E-30-PT-EWP	43	E-65-SS-EWP	45
CL-A12	25	E-1600-30-IP	9	E-1600A-RTM-EWP	10	E-30TF	44	E-65-WH	45
CL-A16	25	E-1600-30-IPEWP	9	E-1600AST2IPEWP	11	E-32	43	E-65-WH-EWP	45
CL-D2	25	E-1600-32A	9	E-1600-ASTIPEWP	11	E-32-EWP	43	E-70-BK	45
CL-D4	25	E-1600-32A-EWP	9	E-1600A-TP2-EWP	10	E-32-IP	44	E-70-BK-EWP	45
CL-DMA12	25	E-1600-32-IP	9	E-1600A-TP-EWP	10	E-32-IP-EWP	44	E-70-BN	45
CL-DMA16	25	E-1600-32-IPEWP	9	E-1600-BKA	8	E-32TF	44	E-70-BN-EWP	45
CL-DMD2	25	E-1600-40A	8	E-1600-BKA-EWP	8	E-32T	47	E-70-SS	45
CL-DMD4	25	E-1600-40A-EWP	8	E-1600-BK-IP	8	E-32T-SS	47	E-70-SS-EWP	45
CL-RFT	25	E-1600-40-IP	8	E-1600-BK-IPEWP	8	E-32T-SS-IP	47	E-70-WH	45
CL-SMD2	25	E-1600-40-IPEWP	8	E-1600-BLA	8	E-35	43	E-70-WH-EWP	45
CL-SMD4	25	E-1600-45A	8	E-1600-BLA-EWP	8	E-35-EWP	43	E-75-BK	45
CL-WGA16	25	E-1600-45A-EWP	8	E-1600-BL-IP	8	E-35-IP	44	E-75-BK-EWP	45
CL-WGD4	25	E-1600-45-IP	8	E-1600-BL-IPEWP	8	E-35-IP-EWP	44	E-75-BN	45
CPC-1	26	E-1600-45-IPEWP	8	E-1600-BLPA	8	E-40-BK	45	E-75-BN-EWP	45
CPC-4	26	E-1600-50A	11	E-1600-BLPA-EWP	8	E-40-BK-EWP	45	E-75-SS	45
CTG-1A	24	E-1600-50A-EWP	11	E-1600-BLP-IP	8	E-40-BN	45	E-75-SS-EWP	45
CTG-2A	25	E-1600-50-IP	11	E-1600-BLPIPEWP	8	E-40-BN-EWP	45	E-75-WH	45
D10	40	E-1600-50-IPEWP	11	E-1600BLT2IPEWP	11	E-40-SS	45	E-75-WH-EWP	45
D22	40	E-1600-52A	11	E-1600-BLTIPERWP	11	E-40-SS-EWP	45	ES-1	39
D32	40	E-1600-52A-EWP	11	E-1600-GT-IPEWP	10	E-40-WH	45	FAXJ-1000	29
D44	40	E-1600-52-IP	11	E-1600-IP	8	E-40-WH-EWP	45	FBI-1A	22
D56	40	E-1600-52-IPEWP	11	E-1600-IP-EWP	8	E-50-BK	45	FXI-1A	22
D6	40	E-1600-53-IP	10	E-1600-RDA	8	E-50-BK-EWP	45	HF-3W	22

PRODUCT INDEX by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
K-1200	37	K-1900-6-IP	15	PA-250	21	SR-1	24	VE-9x12B-1P	35
K-1200-EWP	37	K-1900-6-IP-EWP	15	PA-250-IP	19	SRC-1	41	VE-9x12B-2P	35
K-1200-IP	37	K-1900-7	14	PA-2A	21	SR-IP	24	VE-9x12B-3P	35
K-1200-IP-EWP	37	K-1900-712L	14	PA-30	21	SRL-1	24	VE-9x12MK-1	35
K-1205	37	K-1900-712L-EWP	14	PA-60	21	SV-5W	27	VE-9x12MK-2	35
K-1205-EWP	37	K-1900-712L-IP	15	PA-IP	19	TBB-1B	32	VE-9x12MK-3	35
K-1205-IP	37	K-1900712LIPEWP	15	PAN-1A	26	TDR-1	26	VE-9x12R-0P	35
K-1205-IP-EWP	37	K-1900-7-EWP	14	PB-1	12	TR-1	27	VE-9x12R-1P	35
K-1270	37	K-1900-7-IP	15	PB-100	27	VCAM-1	37	VE-9x12R-2P	35
K-1270-EWP	37	K-1900-7-IP-EWP	15	PB-3	12	VCAM-1IR	37	VE-9x12R-3P	35
K-1270-IP	37	K-1900-8	14	PB-3-IP	12	VCAM-2-BN	37	VE-9x12Y-0P	35
K-1270-IP-EWP	37	K-1900-812L	14	PBR-3	20	VCAM-2-SS	37	VE-9x12Y-1P	35
K-1275	37	K-1900-812L-EWP	14	PF-6A	30	VE-3x5	34	VE-9x12Y-2P	35
K-1275-EWP	37	K-1900-812L-IP	15	PI-1A	22	VE-5x10	34	VE-9x12Y-3P	35
K-1275-IP	37	K-1900812LIPEWP	15	PNL-VCAM-2-BN	37	VE-5x10-NR	34	VE-ARSW	13
K-1275-IP-EWP	37	K-1900-8-EWP	14	PNL-VCAM-2-SS	37	VE-5x10-NR-SS	34	VE-GNP	34
K-1500-6A	14	K-1900-8-IP	15	PP-250	21	VE-5x10-PNL	34	VE-GNP-2	34
K-1500-7	14	K-1900-8-IP-EWP	15	PRX-1	39	VE-5x10-PNL-NR	34	VE-GNP-IG	34
K-1500-EHFA	12	K-1900-9	17	PRX-2	39	VE-5x10-PNLNRSS	34	VE-GNP-SS	34
K-1500P-D	16	K-1900D-2	16	PRX-3	39	VE-5x10-PNL-SS	34	VE-LIGHT	34
K-1500P-D ASH	16	K-1900D-2 ASH	16	PRX-3-MK-GNP	39	VE-5x10-SS	34	VE-PBL	35
K-1500P-W	16	K-1900D-IP	16	PRX-3-MK-VEGNP	39	VE-5x5	33	VE-RMB	34
K-1500P-W ASH	16	K-1900D-IP ASH	16	PRX-4	39	VE-5x5-NR	33	VE-SPG	35
K-1600-EHFA	10	K-1900W-2	16	PRX-5	39	VE-5x5-NR-RD	33	VR-1B	31
K-1700-3	38	K-1900W-2 ASH	16	PRX-C	39	VE-5x5-NR-SS	33	W-1000	36
K-1700-3-BN	38	K-1900W-IP	16	PRX-C-ISO	39	VE-5x5-NR-WH	33	W-1000-EWP	36
K-1700-3-BN-EWP	38	K-1900W-IP ASH	16	PRX-FOB	39	VE-5x5-NR-YL	33	W-2000A	36
K-1700-3-EWP	38	K-2000-DVA	17	PS-48-RGA	27	VE-5x5-PNL	33	W-2000A-EWP	36
K-1700-BN-IP	38	K-202-DVA	17	PSA-IP	19	VE-5x5-PNL-NR	33	W-3000	36
K-1700-BN-IPEWP	38	K-600F	22	PSA-TB-IP	19	VE-5x5-PNL-NRRD	33	W-3000-EWP	36
K-1700-IP	38	LC-3	13	Q170600 RINGER	16	VE-5x5-PNL-NRSS	33	W-3005	36
K-1700-IP-EWP	38	LC-6	13	RAD-1A	22	VE-5x5-PNL-NRWH	33	W-3005-EWP	36
K-1705-3	38	LC-8	13	RAD-AMP	27	VE-5x5-PNL-NRYL	33	X-1605	46
K-1705-3-BN	38	LDB-1	26	RC-2A	41	VE-5x5-PNL-RD	33	X-1605-32	46
K-1705-3-BN-EWP	38	LDB-2	26	RC-3	41	VE-5x5-PNL-SS	33	X-1605-32-EWP	46
K-1705-3-EWP	38	LDB-3	26	RC-4A	41	VE-5x5-PNL-WH	33	X-1605-EWP	46
K-1705-BN-IP	38	LLA-1	32	RG-10A	32	VE-5x5-PNL-YL	33	X-205-BK	47
K-1705-BN-IPEWP	38	LLA-4	32	RG-204	32	VE-5X5-RD	33	X-205-BK-EWP	47
K-1705-IP	38	LM-24D	13	RG-224	32	VE-5x5-SS	33	X-205-BN	47
K-1705-IP-EWP	38	LPL-1	31	RG-4	32	VE-5x5-WH	33	X-205-BN-EWP	47
K-1770-BN-IP	38	LPR-1	26	SA-1H	24	VE-5x5-YL	33	X-205-MMK	47
K-1770-BN-IPEWP	38	LRR-4	39	SA-1S	24	VE-6x7	33	X-205-SS	47
K-1770-IP	38	LRT-4	39	SA-25	24	VE-6x7-NR	33	X-205-SS-EWP	47
K-1770-IP-EWP	38	LSD-2	13	SA-IR	24	VE-6x7-NR-SS	33	X-35-BK	46
K-1775-BN-IP	38	LSR-1	13	SA-TBA	23	VE-6x7-PNL	33	X-35-BK-EWP	46
K-1775-BN-IPEWP	38	LV-1K	12	SA-X12	24	VE-6x7-PNL-NR	33	X-35-BN	46
K-1775-IP	38	LVR-1	12	SL-2	31	VE-6x7-PNL-NRSS	33	X-35-BN-EWP	46
K-1775-IP-EWP	38	M2W	23	SL-2-EWP	31	VE-6x7-PNL-SS	33	X-35-SS	46
K-1900-3	40	MTG-10	26	SLP-1	24	VE-6x7-SS	33	X-35-SS-EWP	46
K-1900-30	17	NS-1	27	SLP-4	24	VE-9x12B-0P	35	ZPI-4	23
K-1900-5	17	PA-15	21						

2026 | TABLE of CONTENTS

EMERGENCY COMMUNICATION 7-13

Analog and VoIP ADA Compliant Emergency Phones	7-12
Stainless Steel Speaker Phones	8-10
Red/Yellow/Blue/Black Surface Mount Phones	8
Double Gang Mount Phones	9
Flush Mount Panel Phones	9-10
Direct Replacement Phones	10
Line Seizure Relay	13
Emergency Phone Kits	11
No-Chassis Phones	11
Tower Phones with Strobe Light	11
Analog to VoIP Conversion Kit	10
Elevator Phone Box Emergency Phone	10
Panic Buttons	12
Line Verification Panel with Key Switch	12
Area of Refuge Accessories	13
Line Sharing	13
Line Status Display	13
Line Concentrators	13

TELEPHONES 14-16

Analog Stainless Steel Panel Phones with Handsets	14
VoIP Stainless Steel Panel Phones with Handsets	15
Multi-Number Dialer Phones	14-15
Hot-Line and Courtesy Phones	14-16
Single Number Dialer Phones	14-16
Panel Phone with Built-In Entry System	15
Dial-Less Phones with Ringers	16
Electronic Ringer	16
Classic VoIP Phones with Auto Dialer	16

DIALERS 17

Touch Tone Dialer	17
100 Number Speed Dialer	17
Smart Touch Tone Dialer	17
Alarm Dialers / Announcers	17

PAGING PRODUCTS 18-24

Viking Device Manager (VDM)	18
IP Paging	19-20
Paging Amplifiers	19, 21
Anti-Feedback Paging Interface	22
Talk-Back Amplifier	22
Night Bell	22
Telecom Paging Interface	22
Page Port/Trunk Input/FXO/FXS Paging Interface	22
Key Phone Paging / Ringing Amplifier	23
Zone Paging Controller	23
Paging Speakers, Horns, and Accessories	23
Clock Controlled Tone Generator	24
Mass Notification Announcer	24
Audio Isolation Board	24
Single Line Paging Controllers	24
SIP and Analog Ringers	24
Self-Amplified Paging System	24

CLOCK SYSTEMS 25

Primary Clock / Networked Clock Control Over Paging	25
Wireless Synchronized Clocks and Accessories	25
RF Transmitter	25

PROBLEM SOLVERS

26-32

Loop and Ring Detectors	26
Panasonic® Doorphone Station Adapter	26
Line Powered Ringer	26
Tone Generator	26
Time Delay Relay	26
CPC Disconnect	26
Toll Restrictor	27
Buttons and Switches	27
Miscellaneous Gadgets	26-27
Remote Access Device	22, 27
Digital Voice Announcer	29
Phone/Fax Routing Switch	29
Ringdown Circuits	30
Ground to Loop Start Converter	30
Power Fail Bypass	30
Strobe Lights	31
Telephone Status Indicators	31
Ring Boosters	32
Talk Battery Booster	32
Long Loop Adapters	32

ENCLOSURES

33-35

Surface Mount Boxes	33-34
Blank Panel Surface Mount Boxes	33-34
LED Lighting Kit	34
Mounting Accessories	34
Gooseneck Pedestals	34
Outdoor Enclosures and Accessories	35

ACCESS CONTROL

36-45

Door Entry and CCTV Controller	36
Doorboxes	36
12 Button Apartment Entry Systems	37
Analog Color Video Cameras	37
Analog Entry Phones with Keypads	38
VoIP Entry Phones with Keypads	38
Analog Entry Phones with Keypads and Cameras	38
VoIP Entry Phones with Keypads and Cameras	38
Analog Entry Phones with Proximity Readers	38
VoIP Entry Phone Systems with Proximity Readers	38
Analog Entry Phones with Cameras and Readers	38
VoIP Entry Phones with Cameras and Readers	38
Proximity Readers / Keypads / Cards / Fobs	39
Proximity Entry Controller	39
Wireless Access Control System	39
Apartment/Office Door Entry Dialers / Controllers	40
“No Phone Line” Entry Controller	40
Directories	40
Touch Tone Controlled Relays	41
Network Enabled Relay Controller	41
Entry Phone Interface / Controllers	42
Analog Speaker Phones	43
Touch-Free Entry Phones	44
VoIP Entry Phones	44
Single Gang Entry Phones	45
Double Gang Entry Phones	43-45

X-SERIES

46-47

IP Intercoms with HD Video	46
IP Emergency Phones with HD Video	46
Compact IP Intercoms with HD Video	47
IP Intercoms	47

FEATURES and OPERATION for Viking ADA Compliant Emergency Phones



- Analog or VoIP models
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Cycles through up to 5 emergency numbers on busy or no answer
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating (page 28)
- Complies with ASME A17.1 Elevator Code when used with LV-1K (page 12)



Analog: 1600A Series

ANALOG FEATURES and OPERATION

- Telephone line powered
- Connect to a CO line, analog PABX station, or FXS port
- Compatible with Central Station Monitoring (CSM)
- 16 second I.D. announcement
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out
- Temperature range: -30°F to 170°F

The 1600A Series Emergency Phones are designed to provide quick and reliable access to emergency personnel via two-way, handsfree voice communication over a telephone network. The 1600A Series have Braille labels and meet ADA requirements for elevator telephones. The phones can be programmed on-site or remotely from a touch tone phone.

When the "Help" button is pressed, the 1600A Series phone goes off-hook, and the built-in touch tone dialer calls the pre-programmed 1 to 20 digit number. The "Connected" LED flashes during dialing. In the event that the line is busy or there is no answer, the unit can automatically dial up to 4 more numbers. When the call is answered, the 1600A Series phone lights the "Connected" LED steady and sends a field-programmed 1 to 20 digit touch tone number or 16 second voice announcement indicating the location of the emergency phone.

Use the PB-100 (see page 27) to remotely program and poll emergency phones as to their working status.

VoIP: 1600-IP Series

VOIP FEATURES and OPERATION

- 2 Amp relay contacts for lights, strobes, chimes, door or gate control, etc.
- SIP compliant and PoE powered (class 1, <4 Watts)
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- 28 second I.D. announcement
- Temperature range: -40°F to 140°F
- Hangs up on busy signal, time-out, or touch tone command

The 1600-IP Series Emergency Phones are designed to provide quick and reliable handsfree communication for SIP VoIP phone systems with PoE. All 1600-IP Series phones meet ADA requirements for elevator and emergency telephones, and can be programmed from any PC on the same LAN or remotely using a static IP address.

When the "Help" button is pressed, the 1600-IP Series phone dials a pre-programmed telephone number. The "Connected" LED momentarily flashes during dialing. In the event the line is busy or there is a ring-no-answer, the unit can be programmed to call additional phone numbers. The phone then cycles through up to 5 pre-programmed emergency numbers until the call is answered. When the call is answered, the digital voice announcer will automatically play to identify the location of the emergency call and then light the "Connected" LED to show that handsfree communication to emergency personnel is established. The "*" key will send the I.D. number (if programmed), and play the announcement again. The distant party will know the location of the emergency call by either the voice announcement or by decoding the touch tone I.D. number.

Installation requires a network administrator / IT technician.

ADA COMPLIANT EMERGENCY PHONES

Low-Profile Emergency Phones



E-1600-RDA
E-1600-RD-IP



E-1600-SSA
E-1600-SS-IP



E-1600-YLA
E-1600-YL-IP



E-1600-BLA
E-1600-BL-IP



E-1600-BKA
E-1600-BK-IP



E-1600-BLPA
E-1600-BLP-IP

- Compact low-profile design
- Material: Steel with durable high visibility textured powder paint or brushed stainless steel finish
- Includes Braille label, "Call Connected" LED, and I.D. Announcement for ADA compliance
- Dimensions: 5.75" x 3.08" x 1.05"
- Mounting: Surface mount to walls, posts, or single gang boxes
- For features and operation, see page 7

Model	Finish	Analog	VoIP	EWP
E-1600-BKA	Black	●		
E-1600-BKA-EWP	Black	●		●
E-1600-BK-IP	Black		●	
E-1600-BK-IPEWP	Black		●	●
E-1600-BLA	Blue	●		
E-1600-BLA-EWP	Blue	●		●
E-1600-BL-IP	Blue		●	
E-1600-BL-IPEWP	Blue		●	●
E-1600-BLPA	Blue	●		
E-1600-BLPA-EWP	Blue	●		●
E-1600-BLP-IP	Blue		●	
E-1600-BLPIPEWP	Blue		●	●
E-1600-RDA	Red	●		
E-1600-RDA-EWP	Red	●		●
E-1600-RD-IP	Red		●	
E-1600-RD-IPEWP	Red		●	●
E-1600-SSA	Stainless	●		
E-1600-SSA-EWP	Stainless	●		●
E-1600-SS-IP	Stainless		●	
E-1600-SS-IPEWP	Stainless		●	●
E-1600-YLA	Yellow	●		
E-1600-YLA-EWP	Yellow	●		●
E-1600-YL-IP	Yellow		●	
E-1600-YL-IPEWP	Yellow		●	●

Compact Emergency Phones



E-1600A
E-1600-IP



E-1600-45A
E-1600-45-IP



E-1600-60A
E-1600-60-IP



E-1600-65A
E-1600-65-IP

- Material: Steel with durable high visibility textured powder paint
- Includes Braille label, "Call Connected" LED, and I.D. Announcement for ADA compliance
- Dimensions: 5.25" x 4.0" x 2.0"
- Mounting: Surface mount to walls, posts, single gang boxes, or recess mount in elevator phone boxes
- For features and operation, see page 7

E-1600-40A
E-1600-40-IP

Emergency phones
with no lettering for
custom applications.
Braille label included.



Model	Color	Analog	VoIP	EWP
E-1600A	Red	●		
E-1600A-EWP	Red	●		●
E-1600-IP	Red		●	
E-1600-IP-EWP	Red		●	●
E-1600-40A	Red	●		
E-1600-40A-EWP	Red	●		●
E-1600-40-IP	Red		●	
E-1600-40-IPEWP	Red		●	●
E-1600-45A	Yellow	●		
E-1600-45A-EWP	Yellow	●		●
E-1600-45-IP	Yellow		●	
E-1600-45-IPEWP	Yellow		●	●
E-1600-60A	Blue	●		
E-1600-60A-EWP	Blue	●		●
E-1600-60-IP	Blue		●	
E-1600-60-IPEWP	Blue		●	●
E-1600-65A	Blue	●		
E-1600-65A-EWP	Blue	●		●
E-1600-65-IP	Blue		●	
E-1600-65-IPEWP	Blue		●	●

Vandal Resistant Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in elevator cabs, stairwells, hallways, etc.
- Dimensions: 13.0" x 10.5" x 2"
- Heavy-duty panel with laser etched lettering for years of use



- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-02A	•		
E-1600-02A-EWP	•		•
E-1600-02-IP		•	
E-1600-02-IPEWP	•	•	•

Heavy-Duty Phone

- Material: Heavy duty marine grade 316 stainless steel
- Mounting: Surface mount to walls, posts, single or double gang boxes or recess mount in elevator phone boxes
- Suitable for areas with vandalism issues
- Dimensions: 7.22" x 5.36" x 1.55"



- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-03B	•		
E-1600-03B-EWP	•		•
E-1600-03-IP		•	
E-1600-03-IPEWP	•	•	•

Two-Button Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount with included plastic rough-in box or use an optional **VE-Series** Surface Mount Box, sold separately (page 33)
- INFO button dials additional numbers for general info or directions



- Dimensions: 5.0" x 5.0" x 2.25"
- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-20A	•		
E-1600-20A-EWP	•		•
E-1600-20-IP		•	
E-1600-20-IPEWP	•	•	•

Double-Gang Mount Two-Button Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in a standard double-gang electrical box
- INFO button dials additional numbers for general info or directions
- Dimensions: 5.0" x 5.0" x 2.25"



- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-22-IP		•	
E-1600-22-IPEWP	•	•	•

Standard Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount with included plastic rough-in box or use an optional **VE-Series** Surface Mount Box, sold separately (page 33)
- Dimensions: 5.0" x 5.0" x 2.25"



- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-30A	•		
E-1600-30A-EWP	•		•
E-1600-30-IP		•	
E-1600-30-IPEWP	•	•	•

Double-Gang Phone

- Material: Brushed marine grade 316 stainless steel
- Mounting: Flush mount in a standard double-gang electrical box
- Dimensions: 5.0" x 5.0" x 2.25"



- For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-32A	•		
E-1600-32A-EWP	•		•
E-1600-32-IP		•	
E-1600-32-IPEWP	•	•	•

EMERGENCY PHONES

Direct Replacement Emergency Phones

ADA Compliant Replacement Phones for *Code Blue / GAI-Tronics / Ramtel / Talkaphone

- Direct replacement for select GAI-Tronics, Ramtel, and Talkaphone panel phones
- Replacing Code Blue tower phones (requires redrilling and tapping)
- Flush mount to: Code Blue, GAI-Tronics, Ramtel, and Talkaphone towers/wall mounts/boxes/pedestals
- Comes standard with Enhanced Weather Protection (EWP), see page 28
- Material: Brushed marine grade 316 stainless steel
- For features and operation, see page 7

* Code Blue®, GAI-Tronics®, Ramtel®, and Talkaphone® are registered trademarks of their respective owners.

Model	Replaces	Analog	VoIP	EWP
E-1600A-TP-EWP	Select Talkaphone and Code Blue models	•		•
E-1600A-TP2-EWP	Select two-button Talkaphone and Code Blue models	•		•
E-1600A-GT-EWP	Select GAI-Tronics models	•		•
E-1600A-RT-EWP	Select Ramtel models	•		•
E-1600A-RTM-EWP	Select Ramtel models	•		•
E-1600-TP-IPEWP	Select Talkaphone and Code Blue models		•	•
E-1600-TP2IPEWP	Select two-button Talkaphone and Code Blue models		•	•
E-1600-GT-IPEWP	Select GAI-Tronics models		•	•
E-1600-RTMIPEWP	Select Ramtel models		•	•
E-1600-RT-IPEWP	Select Ramtel models		•	•



Emergency Panel Phone

- Material: Brushed marine grade 316 stainless steel
- Dimensions: 11.23" x 7.08" x 2"
- Heavy-duty panel with laser etched lettering for years of use
- Mounting hardware included
- For features and operation, see page 7

These panel phones are specifically designed to fit seamlessly within Viking's **VE-9x12** Outdoor Enclosures. Ideal for both indoor and outdoor swimming pool areas, or any location requiring a protected emergency phone. Optional red "Emergency" label for **VE-9x12** available, see page 35 for more info.

Phone shown in Red Enclosure [VE-9x12R-0P] sold separately

Yellow (VE-9x12Y-0P) or Black (VE-9x12B-0P) Enclosures available

Model	Analog	VoIP	EWP
E-1600-912A	•		
E-1600-912A-EWP	•		•
E-1600-912-IP		•	
E-1600-912IPEWP		•	•



For more info on Viking Enclosures, see page 35.



Analog to VoIP Conversion Kit

The **E-1600-53-IP** conversion kit converts select Viking analog phones to VoIP. The kit saves money by re-using the housing, faceplate, mic, speaker, switch, and LED.



For features and operation, refer to page 7

Model	Analog	VoIP	EWP
E-1600-53-IP		•	
E-1600-53-IPEWP		•	•

Emergency Phone for Elevator Phone Box

- Red powder painted aluminum
- Mounting: Recess mount in standard elevator phone box (10" x 7" x 3")
- Dimensions: 9.875" x 6.86" x 2.1"
- For features and operation, see page 7

Model	Analog	VoIP	EWP
K-1600-EHFA	•		



Emergency Phone Kit for Custom Installations

- Material: Zinc plated steel
- Mounting: Install behind elevator panels for applications requiring a custom panel
- Dimensions: 5.0" x 5.0" x 2.25"



Model	Analog	VoIP	EWP
E-1600-55A	●		
E-1600-55A-EWP	●	■	●
E-1600-55-IP	●		
E-1600-55-IPEWP	●	■	●

- For features and operation, refer to page 7

42-Inch Tower Phones with Blue LED Strobe

- High intensity flashing LED strobe light with steady-on beacon option, 4 flash patterns and 6 brightness settings
- Strobe: Vandal resistant polycarbonate plastic
- Tower Chassis: 3.0" x 6.0" aluminum rectangular tube
- Phone Panel: 316 marine grade stainless steel faceplate and stainless steel button
- Mounting: Surface mount to wall or post
- Strobe power supply included
- Comes with Enhanced Weather Protection (EWP), see page 28
- For features and operation, see page 7



Model	Lettering	Buttons	Analog	VoIP	EWP
E-1600A-AST-EWP	Assistance	1	●		●
E-1600A-AST2EWP	Assistance	2	●		●
E-1600-ASTIPEWP	Assistance	1		●	●
E-1600AST2IPEWP	Assistance	2		●	●
E-1600A-BLT-EWP	Emergency	1	●		●
E-1600A-BLT2EWP	Emergency	2	●		●
E-1600-BLTIPEWP	Emergency	1		●	●
E-1600BLT2IPEWP	Emergency	2		●	●

Emergency Phone Parts Kits

Viking Emergency Phone "parts kits" are specifically designed to be used behind custom panels or with competitor's panels. These are parts kits and do not include a chassis.

Kit includes:

- Circuit board
- Speaker
- LED
- Microphone
- Button(s)
- Braille label



For features and operation, refer to page 7

Model	Description	Analog	VoIP	EWP
E-1600-50A	Parts kit with 1 button	●		
E-1600-50A-EWP	Parts kit with 1 button	●	■	●
E-1600-50-IP	Parts kit with 1 button		●	
E-1600-50-IPEWP	Parts kit with 1 button	■	●	●
E-1600-52A	Parts kit with 2 buttons	●		
E-1600-52A-EWP	Parts kit with 2 buttons	●	■	●
E-1600-52-IP	Parts kit with 2 buttons		●	
E-1600-52-IPEWP	Parts kit with 2 buttons	●	●	●

Emergency Phone Retrofit Kit NEW

The E-1600-54A and E-1600-54-IP are universal emergency phone retrofit kits for replacing an existing "behind the elevator panel" emergency phone. These phones meet ADA requirements for elevator or emergency telephones and are designed to provide quick and reliable handsfree communication.



Installation is easy - simply cut the existing wires and attach to the appropriate wire colors from the phone board mounting box using the included butt connectors. Strong 3M® VHB double-sided tape is used to securely mount the mic, speaker, and phone board mounting box.

Kit includes:

- Phone board mounting box
- Speaker
- Microphone
- Color-coded wires
- Strong 3M VHB double-sided tape

Model	Analog	VoIP	EWP
E-1600-54A	●		
E-1600-54-IP		●	

For features and operation, refer to page 7

EMERGENCY PHONES and ACCESSORIES

All-In-One Emergency Phone Panic Buttons

The **PB-3**, an analog model, and the **PB-3-IP**, an IP-based version, offer reliable and efficient solutions for initiating emergency protocols. Both models are equipped with a large, easy-to-activate button, making them ideal for schools, businesses, and public facilities where quick access to emergency services is crucial.

These panic buttons are simple to use yet highly effective. Once pressed, they can directly dial emergency services and play an optional pre-recorded message, then leave the mic open for silent monitoring. This versatility makes them perfect for environments where quick action is essential.

- Built-in 5 number dialer
- Cycles through numbers on busy or no-answer
- Programming stored in non-volatile memory
- Optional custom ID announcement
- Built-in microphone for silent monitoring
- Built-in red LED lights up during an emergency call

Model	Analog	IP
PB-3	•	
PB-3-IP		•



ALYSSA'S LAW

Named after Alyssa Alhadeff, a victim of the tragic Parkland school shooting, **Alyssa's Law** requires public schools to install panic alarms that can quickly alert law enforcement during an emergency, thereby speeding up police response times.

Viking panic buttons provide a solution that can help schools comply with the law and, most importantly, keep students and staff safe.



Alyssa's Law has passed in several states, and has been introduced at the federal level.

◀ STAY UP TO DATE with ALYSSA'S LAW

Emergency Phone (non-ADA)

- Two wire installation: analog PABX, CO line, or FXS port powered
- Heavy-duty aluminum
- Durable red powder paint
- Recess mount in an elevator phone box
- Requires an external dialer (page 17)

Model	
K-1500-EHFA	

- Dimensions: 10" x 7" x 3"



Line Verification Panel

- Test **1600A Series** phones for dial tone
- Detects a cut or disconnected phone line
- ASME A17.1 Elevator Code compliant
- Use on analog devices or an analog line
- Use with Viking **1600-IP Series** phones to indicate LAN connection failures


Model	
LV-1K	



Silent Panic Button Kit

- Use in conjunction with a Viking **1600A Series** or **1600-IP Series** emergency phone, or a **K-202-DVA / K-2000-DVA** alarm dialer (not included)
- LED can indicate call connected
- Unobtrusive - mount anywhere at any angle with foam tape

Model	
PB-1	



Line Verification Relay

The **LVR-1** Line Verification Relay monitors the service on analog phone lines or extensions and provides switched relay contacts when an analog phone line is down.

- On board relay with both NO and NC contacts
- Connect phone line via RJ-11 or terminal block
- Connect power via 2.1mm plug or terminal block

Model	
LVR-1	



Area of Refuge Signs and Accessories

Compliant with IBC, ADA, NFPA, and ICC Requirements



ARS-IB100



ARS-TB100



VE-ARSW



ARS-DBL100



ARS-DRB100

ARS-IB100: 6" wide x 7.5" tall instructional sign with 0.031" raised white "Push For Help" letters and engraved white text, California compliant contracted grade 2 Braille.

ARS-TB100: 6" wide x 9" tall tactile sign with 0.031" raised white letters and accessibility symbol, California compliant contracted grade 2 Braille.

VE-ARSW: Area of Refuge surface mount command center cabinet. Lockable for mounting "Two-Way Communications System" phone in low rise (less than 60 ft tall) buildings.

ARS-DBL100 (left arrow) and **ARS-DRB100** (right arrow): 12" wide x 4" tall directional sign with engraved white text.

Model	Description
ARS-DBL100	Left arrow directional sign
ARS-DRB100	Right arrow directional sign
ARS-IB100	Instructional Braille and raised letter sign
ARS-TB100	Blue tactile Braille and raised letter sign
VE-ARSW	Command center cabinet

6 Port Line Concentrator

The **LC-6** Line Concentrator eliminates the monthly charges for a dedicated line to each elevator. The **LC-6** is designed to be used with the Viking 1600A Series Elevator Phones. Up to six of these emergency phones can communicate with authorized personnel on 3 other phones within a building, or add a telephone line to allow communication outside the building. A call initiated by an emergency phone can dial internally, externally, or both. Any other phones that are activated will be bridged with authorized personnel, thus fulfilling ASME A17.1 requirements.

All telephone line inbound calls are answered by the **LC-6**. A touch tone command will route the call to any of the emergency phone ports. If no command is detected within 4 seconds, the call will be routed to the last emergency phone that was used.

Model
LC-6



- Connect up to 6 emergency phones
- Communicate with local and/or remote personnel
- Automatic answering of inbound calls
- Meets the ASME A17.1 requirements
- Separate ports for Fire Floor, Machine Room, and Lobby
- Programmable daily line verification check

Line Seizure Relay

- Allows an emergency device to share a line with other devices
- Can be used on any CO line or analog PABX / KSU station
- Interrupts a call in progress and returns fresh dial tone to the emergency phone
- Off hook indication for emergency device port
- Easy modular connections

Model
LSR-1



Smart Line Sharing Device

- Allows an emergency device to share a line with other devices
- Priority to emergency devices
- Incoming calls routed to one of two ports by Caller ID, Distinctive Ring, or Call Back
- Stores up to 12 Caller ID numbers

Model
LSD-2



Line Status Display

- Compatible with Viking's **LC-6** Line Concentrator
- Requires only one pair of wires
- Adjustable audio volume

Model
LM-24D



3 Port Line Concentrator

- Fire Floor Phone port provided to meet elevator code
- Connect up to 3 emergency phones
- Inbound calls can be transferred to any emergency phone port

Model
LC-3



8 Port Line Concentrator

- Connect up to 8 emergency phones
- Auto-answers inbound calls
- Call waiting
- Paging feature
- Fire floor phone connection
- Battery backup

Model
LC-8



ANALOG PANEL TELEPHONES

Analog (No Dial) Panel Phones


The **K-1500-6A** and **K-1500-7** provide simple vandal resistant communication in a flush mount, stainless steel, panel telephone. The **K-1500-6A** and **K-1500-7** work with Viking's **DLE-200B** Line Simulator (page 30) or on a dedicated ringdown circuit. If dialing is necessary, use Viking's **K-1900-7** or combine the **K-1500-6A** or **K-1500-7** with Viking's **K-1900-5** Hot-Line Dialer (page 17).

The **K-1500-6A** and **K-1500-7** consist of a heavy gauge stainless steel panel, an armored cable, a heavy duty black hearing aid compatible amplified handset, and an all metal cradle. Both phones are designed to mount to a standard double gang electrical box.

- **K-1500-6A** Dimensions: 4.56" W x 4.5" H
- **K-1500-7** Dimensions: 5.0" W x 10.0" H

Model	Analog	VoIP	EWP
K-1500-6A	•		
K-1500-7	•		

- Operates on: CO line or analog PABX / FXS station
- Flush mount to a standard double gang box
- Surface mount the **K-1500-7** with a **VE-5x10** Surface Mount Box (page 34) or a **VE-9x12** enclosure (page 35), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 26) or **SR-1** (page 24), each sold separately

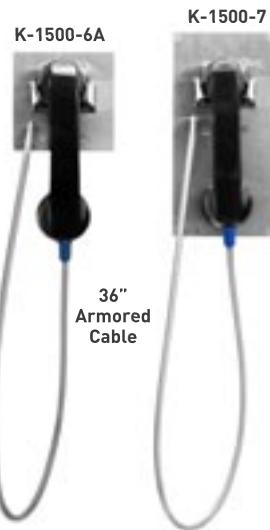

Analog Hot-Line Panel Phone


The **K-1900-7 Series** panel phones will auto-dial a 1-32 digit programmable phone number each time the handset is lifted. The unit can touch tone or pulse dial and will not auto-dial on incoming calls.

Models **K-1900-712L** and **K-1900-712L-EWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 28.

Model	Description	Analog	VoIP	EWP
K-1900-7	36" armored cable	•		
K-1900-7-EWP	54" armored cable	•		•
K-1900-712L	12" armored cable and lanyard	•		
K-1900-712L-EWP	12" armored cable and lanyard	•		•

- Dimensions: 5.0" W x 10.0" H
- Vandal resistant 316 marine grade stainless steel panel
- Hearing aid compatible amplified handset with volume control
- Touch tone or pulse auto-dialing
- Armored cable and metal cradle
- Operating temperature: -30° to 140°F
- Optional **VE-5x10** Surface Mount Box (page 34) or a **VE-9x12** enclosure (page 35), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 26) or **SR-1** (page 24), each sold separately

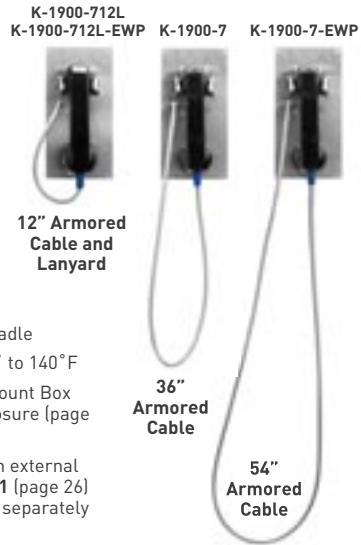

Analog Panel Phone with Keypad


The **K-1900-8 Series** panel phones can either auto-dial a phone number each time the handset is lifted, be used as a multi-number auto-dialer, or be used as a standard (manual dial) phone. The unit will touch tone or pulse dial and will not dial on incoming calls.

Models **K-1900-812L** and **K-1900-812L-EWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 28.


Model	Description	Analog	VoIP	EWP
K-1900-8	36" armored cable	•		
K-1900-8-EWP	54" armored cable	•		•
K-1900-812L	12" armored cable and lanyard	•		
K-1900-812L-EWP	12" armored cable and lanyard	•		•

- Touch tone or pulse speed dialing with a programmable pre-dial pause
- Vandal resistant 316 marine grade stainless steel panel
- Tamper-resistant armored cable and metal cradle
- Dimensions: 5.0" W x 10.0" H
- Temperature range: -30° to 140°F
- Hearing aid compatible amplified handset with volume control
- Optional **VE-5x10** Surface Mount Box (page 34) or a **VE-9x12** enclosure (page 35), each sold separately
- If a ringer is required, use an external unit such as the Viking **LPR-1** (page 26) or **SR-1** (page 24), each sold separately

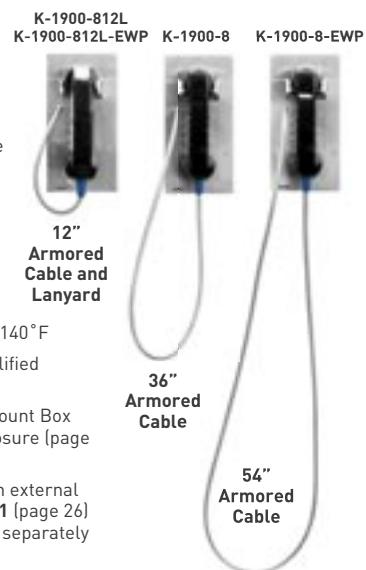

VoIP Panel Phones with Dialer

K-1900-6-IP K-1900-6-IP-EWP

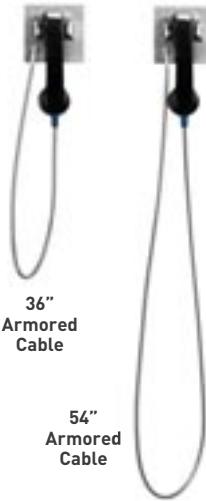

The **K-1900-6-IP Series** and **K-1900-7-IP Series** VoIP Panel Phones will auto-dial a 1-20 digit programmable phone number each time the handset is lifted. If the call is not answered, the phone will dial up to 3 additional phone numbers. The phones are PoE powered and can be programmed from any PC on the same LAN or remotely using a Static IP Address.

When a call initiated by the panel phone is answered, a built-in relay may be activated to control an electric gate or door strike. The relay can also be programmed to activate whenever the phone is off hook, ideal for controlling cameras, etc.

Models **K-1900-712L-IP** and **K-1900712LIPEWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.


Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 28.

- **K-1900-6-IP Series** Dimensions: 4.56" W x 4.5" H
- **K-1900-7-IP Series** Dimensions: 5.0" W x 10.0" H
- Provide vandal resistant communication for SIP VoIP phone systems

Model	Description	Analog	VoIP	EWP
K-1900-6-IP	36" armored cable		●	
K-1900-6-IP-EWP	54" armored cable		●	●
K-1900-7-IP	36" armored cable		●	
K-1900-7-IP-EWP	54" armored cable		●	●
K-1900-712L-IP	12" armored cable and lanyard		●	
K-1900712LIPEWP	12" armored cable and lanyard		●	●

K-1900-712L-IP
K-1900712LIPEWP

K-1900-7-IP K-1900-7-IP-EWP

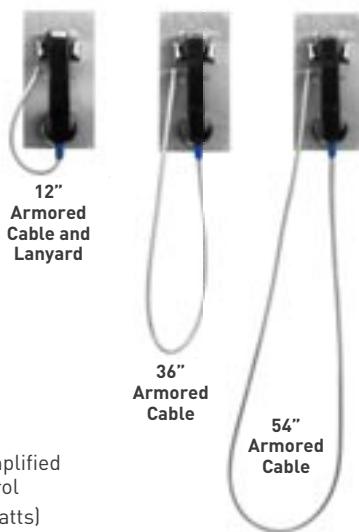

- Hearing aid compatible amplified handset with volume control
- PoE powered (class 1<4 Watts)
- Built-in ringer
- Dials up to 3 additional numbers on busy or ring no answer
- Flush mount to a standard double gang box
- Surface mount any of the **K-1900-7-IP Series** phones with a **VE-5x10** Surface Mount Box (page 34) or a **VE-9x12** enclosure (page 35), each sold separately

VoIP Panel Phone with Built-In Entry System

The **K-1900-8-IP Series** VoIP panel phones can either auto-dial a phone number each time the handset is lifted, be used as a multi-number auto-dialer, or be used as a standard manual dial phone. The panel phone is PoE powered and can be programmed from any PC on the same LAN or remotely using a Static IP Address.

The **K-1900-8-IP Series** phone can dial up to 250 programmable numbers and another 250 rollover numbers. When a call initiated by the panel phone is answered by an apartment or business tenant, a built-in relay may be activated to control an electric gate or door strike. A request for exit (REX) input is included for easy exiting.

Models **K-1900-812L-IP** and **K-1900812LIPEWP** have a 12" long armored cable with an internal stainless steel lanyard for additional strength.

Models with Enhanced Weather Protection (EWP) are designed to meet IP66 Ingress Protection Rating, see page 28.


- Provide vandal resistant communication for SIP VoIP phone systems
- Speed dials up to 250 numbers, each with a rollover number
- Store up to 1000 keyless entry codes
- PoE powered (class 2 < 6.5 Watts)
- Event logging with time and date stamp
- 2 sets of relay contacts for door / gate / camera control
- 26-bit Wiegand input for optional proximity card readers
- Built-in ringer
- Dimensions: 5.0" W x 10.0" H

Model	Description	Analog	VoIP	EWP
K-1900-8-IP	36" armored cable		●	
K-1900-8-IP-EWP	54" armored cable		●	●
K-1900-812L-IP	12" armored cable and lanyard		●	
K-1900812LIPEWP	12" armored cable and lanyard		●	●

K-1900-812L-IP
K-1900812LIPEWP

K-1900-8-IP

K-1900-8-IP-EWP

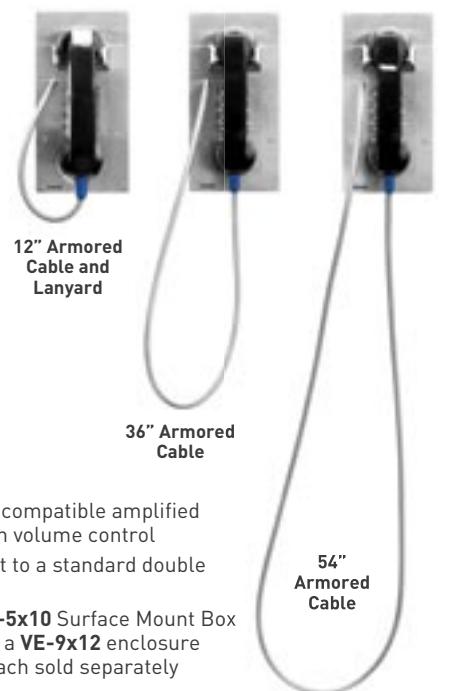

- Hearing aid compatible amplified handset with volume control
- Flush mount to a standard double gang box
- Optional **VE-5x10** Surface Mount Box (page 34) or a **VE-9x12** enclosure (page 35), each sold separately

HOT-LINE and COURTESY TELEPHONES

Single Number Auto-Dial Hot-Line Phones

The **K-1900 Series** of Hot-Line phones are programmable to dial a 1-32 digit telephone number each time the phone's handset is lifted. They can be programmed to touch tone or pulse dial and will not dial on incoming calls.

- 1-32 digit programmable speed dial number
- Telephone line powered and touch tone programmable
- Hearing aid compatible amplified handsets with volume control
- Touch tone and 10/20 pps pulse dialing
- Non-volatile memory (no batteries required)
- Restricts fraudulent calls from hand held dialers
- Available in red, ash or custom colors
- Operates on a CO line, analog PABX station, or FXS port
- Optional **Q170600 RINGER** can be added

Model	Description	Analog	VoIP
K-1900D-2	Red Hot-Line Desk Phone	●	
K-1900W-2	Red Hot-Line Wall Phone	●	
K-1900D-2 ASH	Ash Hot-Line Desk Phone	●	
K-1900W-2 ASH	Ash Hot-Line Wall Phone	●	
Q170600 RINGER	Electronic Ringer	●	



Applications:

- Courtesy and Emergency Phones
- Customer Service
- Airline / Hotel / Rental Car Reservations
- Help Lines
- Cash Machines
- Taxi Service
- Security
- POS Displays

Classic VoIP Phones with Auto Dialer

The **K-1900D-IP** and **K-1900W-IP** VoIP phones will automatically dial a 1-20 digit programmable phone number each time the handset is lifted. If the call is not answered, the phone will dial up to 3 additional phone numbers. The phones are designed to provide quick and reliable communication for SIP VoIP phone systems with PoE. The unit can be programmed from any PC on the same LAN or remotely using a Static IP Address.

- Built-in adjustable ringer
- Hearing aid compatible amplified handset
- SIP compliant
- PoE powered (class 1, <4 Watts)
- Outbound Proxy, Authentication ID, Peer to Peer, VLAN Tagging
- Network downloadable firmware
- Remotely programmable
- Optional **RC-4A** (page 41) for secure remote relay control

Model	Description	Analog	VoIP
K-1900D-IP	Red Hot-Line Desk Phone		●
K-1900W-IP	Red Hot-Line Wall Phone		●
K-1900D-IP ASH	Ash Hot-Line Desk Phone		●
K-1900W-IP ASH	Ash Hot-Line Wall Phone		●



Applications:

- Kiosk Phone
- Hot-Line Phone
- Courtesy Assistance Phone
- Customer Service Phone
- Security or Emergency Phone

Dial-Less Phones with Ringers

Use to Receive Inbound Calls

These phones are compatible with ringdown circuits such as Viking's **DLE-200B** (page 30), dialers such as Viking's **K-1900-5** and **K-1900-30** (page 17) as well as an analog PABX, CO line or FXS port configured as a ringdown circuit.

Model	Description
K-1500P-D	Red Manual Desk Phone
K-1500P-W	Red Manual Wall Phone
K-1500P-D ASH	Ash Manual Desk Phone
K-1500P-W ASH	Ash Manual Wall Phone




Hot-Line Touch Tone Dialer

The **K-1900-5** is an analog PABX, CO line or FXS port powered dialer that automatically dials the programmed number each time the connected phone goes off-hook.

The **K-1900-5** provides 1-32 digit touch tone dialing and 1 or 4 second pauses. The **K-1900-5** can also help eliminate toll fraud by blocking hand-held dialers and "hook-switch" or pulse dialing.

Model
K-1900-5

- Touch tone programmable
- Telephone line powered
- No batteries required
- Ring detection, won't dial on inbound calls
- User programmable security code
- Programmable 1 and 4 second pauses
- Programmable dialing speed
- Can be configured to operate from a contact closure



2 Input Dialer / Announcer

The **K-202-DVA** is a two input, multi-number auto dialer and digital announcer, designed for emergency and non-emergency message notification.

- 2 normally open or normally closed dry contact inputs
- 2 minutes of record time (1 minute per input)
- Record messages locally or remotely
- Up to seven 32-digit phone numbers per input, 14 numbers total
- Rolls to the next number on busy or no answer
- Programmable message repeat and lap counter
- Program with touch tone phone
- Call progress detection
- Power supply included



Model
K-202-DVA

- Terminals to connect an optional switch for local reset of all inputs

8 Input Dialer / Announcer

The **K-2000-DVA** is a programmable, eight input, multi-number auto dialer and digital announcer, designed for both emergency and non-emergency message notification.

- 8 normally open or normally closed dry contact inputs
- 8 minutes of record time (1 minute per input)
- Record messages locally or remotely
- Program with a touch tone phone or a PC
- Up to eight 32-digit phone numbers per input, 64 numbers total
- Rolls to the next number on busy or no answer
- Programmable message repeat and lap counter
- Call progress detection
- "Store Caster" mode
- Power supply included



Model
K-2000-DVA

- Terminals to connect an optional switch for local reset of all inputs

100 Number Dialer

- Add speed dialing features to any analog phone
- Programmable as a single number hot-line dialer or program as a multi-number dialer
- Local or remote programming with a standard touch tone phone
- AC power allows installation on low loop current lines
- Use on an analog PABX, CO line, or FXS port
- Stores up to (100) 32-digit phone numbers



Model
K-1900-9

Smart Touch Tone Dialer

- Add speed dialing features to any analog phone
- Applications include: Parking lot or ramp phones, ATM phones, door entry phones, etc.

When a connected device goes off-hook, the **K-1900-30** automatically dials a 1-20 digit phone number, and can be programmed to call up to 4 additional phone numbers if the line is busy, or is not answered. The **K-1900-30** can be used to add the smart dialing features of a Viking **E-30** to other non-dialing **E-Series** or **K-Series** phones, or any analog phone.



Model
K-1900-30

Viking Device Manager (VDM)

The new standard for programming Viking IP devices

Viking Device Manager (VDM) is a software application that enables the discovery, management, configuration, and updating of multiple Viking IP devices. It streamlines both deployment and ongoing management, saving time on small or large project deployments and ongoing maintenance. With VDM, you can spend less time waiting and more time getting the job done.

Learn more



- ✓ **FREE DOWNLOAD** - No license fees or subscriptions
- ✓ **BULK CONFIGURATION** - Program and update multiple devices at the same time
- ✓ **AUTO-DISCOVERY** - Find all Viking IP devices on your network automatically
- ✓ **OFFLINE CONFIGURATION** - View and edit settings from anywhere, restore when you arrive
- ✓ **PROJECT ORGANIZATION** - Manage multiple job sites all from one app

Viking Device Manager works with the following Viking IP models:

22TB-IP	E-32-IP	PA-250-IP
300-IP	E-35-IP	PA-IP
300TB-IP	E-60-IP Series	PB-3-IP
40-IP	E-20TF-IP	PSA-IP
40-TB-IP	E-30TF-IP	PSA-TB-IP
E-1600-IP Series	E-32TF-IP	SR-IP
E-10-IP	K-1200-IP Series	
E-20-IP	K-1700-IP Series	
E-30-IP	K-1900-8-IP Series	
		...and more coming soon!



Watch the intro video



High Power SIP / Multicast Paging Amplifier

The **PA-250-IP** provides up to 250 Watts of loud paging for SIP based VoIP phone systems (hardware or hosted / cloud based service provider). The **PA-250-IP** can be used for standard SIP endpoint paging or multicast paging.

The **PA-250-IP** can drive up to two hundred fifty (250) 70V speakers and/or paging horns (each speaker set to "1 Watt tap"). The **PA-250-IP** features individual level controls with LED indicators for each input, automatic peak limiting, an adjustable Automatic Level Control, and bass & treble controls.

The unit easily connects with a single CAT5/6 cable from your network switch.

Model
PA-250-IP



- SIP endpoint or multicast group member
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Audio from standard multicast sources
- Network downloadable firmware
- Access code prevents unwanted SIP calls
- Network remote volume control
- Programmable pre-page alert tone
- Powerful 70V amplifier drives up to 250 Watt load
- Door chime trigger input
- Auxiliary and background music inputs
- Individual and master volume controls
- Bass and treble controls
- LEDs show audio level and activity
- Provides loud ringing
- 600 Ohm output to drive additional amplifiers
- Adjustable Automatic Level Control
- Tamper resistant trim pots

SIP / Multicast Paging Adapter with Amplifier

- SIP endpoint and/or multicast group member
- PoE powered (class 3, <13 Watts)
- Paging prioritization
- Supports up to 10 multicast groups
- Relay for activating door locks, etc.
- Built-in 6 Watt class D amplifier can drive up to 6 analog 8 Ohm speakers
- Network downloadable firmware



- Line-level input for background music or mass notification
- Optional access code prevents unwanted SIP calls
- Line-level output for external amplifier

Model
PA-IP

IP Speaker for SIP/Multicast Paging

- SIP endpoint and/or multicast group member
- Supports up to 10 multicast paging groups
- PoE powered (class 3, <13 Watts)
- Built-in 6 Watt class D amplifier drives up to 5 analog 8 Ohm speakers
- Paging prioritization
- Dimensions: 11" diameter x 4" depth
- Line-level input and line-level output
- Network remote speaker volume control



Model
40-IP

IP Paging Speaker Adapter

Convert any 8 Ohm, 25V or 70V analog paging speaker into a SIP endpoint paging speaker. The speaker can then be used for standard one-way SIP endpoint paging or one-way multicast paging.

The compact chassis mounts magnetically to the back of the speaker magnet or attaches to the 25/70V transformer mounting holes on the speaker frame. Attach to the existing speaker wires then connect with a single CAT5/6 cable from your PoE switch.

Model
PSA-IP



The **PSA-IP** has a high efficiency 6 Watt class D amplifier capable of driving up to six 8 Ohm analog paging speakers.

IP Paging Speaker Adapter with Talk-Back

Convert any 8 Ohm, 25V or 70V analog paging speaker to an IP speaker for SIP endpoint paging, multicast paging and making standard or emergency SIP calls.

The compact chassis mounts magnetically to the back of the speaker magnet or attaches to the 25/70V transformer mounting holes on the speaker frame.

An optional auxiliary switch input allows a hard wired button or switch to initiate a SIP call. A momentary



button press will initiate a standard call, while holding the button for 3 or more seconds will initiate an emergency call. The microphone enables talk-back and monitors noise to adjust speaker volume.

SIP / Multicast Paging Horn

The **300-IP** Paging Horn can be used for standard one-way SIP endpoint paging, multicast paging or background music.

The **300-IP** features a high efficiency 6 Watt class D amplifier capable of driving the horn at up to 113 dB SPL at 1 meter.

The **300-IP-EWP** shares all of the features of the **300-IP** in addition to Enhanced Weather Protection (EWP) (see page 28) for outdoor installations where the unit is exposed to precipitation or condensation.

Model	VoIP	EWP
300-IP	•	
300-IP-EWP	•	•

- Large 10-inch diameter horn
- SIP compliant
- PoE powered (class 3, <13 Watts)
- SIP endpoint or multicast group member
- Built-in high-efficiency 6 Watt class D amplifier
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Access code to prevent unwanted SIP calls
- Hangs up on: busy signal, time-out, or touch tone command
- Network remote speaker volume control
- Programmable pre-page alert tone
- RJ45 connector for easy installation



SIP / Multicast Paging Horn with Talk-Back

The **300TB-IP** can be used for: standard one-way SIP endpoint paging, two-way conversations via SIP endpoint paging, one-way multicast paging, and making standard or emergency two-way SIP calls initiated from the optional auxiliary switch input. The microphone enables talk-back and also monitors room noise to increase the speaker volume when necessary. The auxiliary switch input allows a hard wired button or switch to initiate a standard or emergency SIP call.

The **300TB-IP-EWP** shares all of the features of the **300TB-IP** in addition to Enhanced Weather Protection (EWP).

Model	VoIP	EWP
300TB-IP	•	
300TB-IP-EWP	•	•

- Large 10-inch diameter horn
- SIP compliant
- PoE powered (class 3, <13 Watts)
- SIP endpoint or multicast group member
- Automatic Noise Canceling (ANC) feature for operation in noisy environments
- Selectable auto-answer feature for monitoring
- Built-in high-efficiency 6 Watt class D amplifier
- SIP / Multicast: SIP page, SIP page and zoned multicast receive
- Support for access code to prevent unwanted SIP calls
- Hangs up on: busy, time-out, or touch tone command
- Network remote speaker volume control
- Automatic Gain Control (AGC) to automatically increase ring volume to compensate for ambient noise
- RJ45 connector for easy installation



SIP / Multicast Talk-Back Speakers

Viking's Talk-Back Speakers enable two-way conversations via SIP and also allow for standard paging and background music via multicast. The Talk-Back Speakers easily connect with a single CAT 5/6 cable from your PoE switch. An auxiliary switch input allows a hard wired wall button to initiate a standard or emergency SIP call.


- PoE powered (class 3, <13 Watts)
- Up to 28 second ID announcement
- Plays audio from multicast
- SIP endpoint or multicast group member
- Up to 10 multicast paging groups
- Viking's proprietary VOX switching eliminates the need for "Push to Talk"
- Auto-answer feature for monitoring
- Built-in 6 Watt class D amplifier

- Automatic Noise Canceling (ANC) for noisy environments
- Drive up to 5 external analog speakers for more coverage
- Relay to activate door locks, strobe lights, external amplifiers, etc.
- **40TB-IP**'s shallow depth allows easy mounting in a wall or ceiling
- **22TB-IP** is designed for quick and easy installation in drop or suspended ceilings
- Line-level input and output


Model	Description
22TB-IP	24" x 24" Drop-In Ceiling Tile
40TB-IP	11" Diameter Speaker
PBR-3	Wireless Remote (40TB-IP only)



22TB-IP
Ceiling Tile
(24" x 24")



40TB-IP
11" Diameter
Speaker



2 Watt Paging Amplifier / Loud Ringer

- For PABX page port/trunk and FXO applications
- Drives up to (3) 8 Ohm paging horns / speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, and 300AE** (see page 23)

The **PA-2A** monitors up to 6 analog lines for ringing or can be activated by a phone system contact closure. A loud electronic warble (108 dB @ 1 meter), double gong, quadruple chime or a door chime can be selected to announce incoming calls. To page, connect to a paging port, unused trunk input, or FXO port on a phone system. The unit provides 2 Watts of power - enough to drive three 8 Ohm speakers.

Model
PA-2A

The **PA-2A** has an input for loud ringing on/off switch, output for controlling a 12 Volt relay, and 600 Ohm output for sourcing high powered paging amplifiers. Includes one **25AE** paging horn and power supply.



15 Watt Telecom Paging Amplifier

- For Centrex, PABX, FXO and FXS applications
- Drives up to (15) 8 Ohm paging horns / speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, and 300AE** (see page 23)

The **PA-15** allows paging from a PABX paging port, an unused trunk input / FXO port (provides 36 Volts of talk battery), or an analog PABX station, Centrex, CO line or FXS port. The **PA-15** can disconnect on CPC, busy, silence or a 16 to 72 second (defeatable) timer. The **PA-15** can provide an alert tone prior to paging.

Model
PA-15

Background music (muted during page) can be added from an external source. Four electronic tones are available for loud ringing. Power supply included.



30 Watt Telecom Paging Amplifier

- For PABX page port/trunk and FXO applications
- Drives up to (30) 8 Ohm or (50) 70V or 25V speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, 300AE, 25AE-70V, and 30AE-70V** (see page 23)

The **PA-30** provides paging from the phone system paging port, unused trunk input or FXO port (provides 40 Volts of talk battery). The **PA-30** has separate inputs and volume controls for paging, auxiliary source, loud ringing and background music. A contact closure or ringing line can activate loud ringing. Four electronic tones are available for loud ringing. Power supply included.

Model
PA-30

The **PA-30** also has inputs for a night transfer (loud ringing) on/off switch. The **PA-30** has a 600 Ohm output to drive additional amplifiers. Electronic switching eliminates pops and clicks.



60 Watt Power Amplifier

- Add 60 Watts of total paging power to two zones
- Drives up to (60) 8 Ohm or (100) 70V or 25V speakers
- Compatible speakers: **25AE, 30AE, 35AE, 40AE, 300AE, 25AE-70V, and 30AE-70V** (see page 23)

The **PA-60** boosts the power output of smaller paging systems by 60 to 100 speakers. Since each input has its own gain adjustment, one zone can be turned up louder for warehouse paging horn speakers, and the other zone can be turned down for office ceiling speakers.

Model
PA-60

The **PA-60** inputs are transformer coupled so they are floating and isolated. Connect to line level audio or direct to an existing paging amp output. Power supply included.



250 Watt / 70V High Power Paging Amplifiers

Viking's high power 250 Watt / 70V amplifiers can each drive up to (250) 70V speakers and/or paging horns. The **PA-250** connects to any type of analog telecom interface. The **PP-250** can connect to any line level audio source.

Model	Description
PA-250	Telecom Paging Amplifier
PP-250	Paging Power Amplifier

- Power supply included
- Compatible speakers: 70V paging horns and speakers, see page 23

PA-250



PP-250



Anti-Feedback Paging Interface

- Eliminate the feedback "squeal" when paging
- Compatible with paging ports or trunk (FXO) ports
- High quality (80K/40K) digital message storage
- High output: 2V RMS into 600 Ohms
- Programmable paging features
- Power supply included

Model
FBI-1A



HOW IT WORKS: The "live" page is digitally recorded. When complete, the paging amplifier is activated and the page is replayed once or twice.

Handsfree Talk-Back Paging System

- Interface with unused trunk (FXO) ports, dedicated single line phones, and phone systems with a two-way paging port
- 3 Watts of paging power
- Page alert tone
- Optional "Push-to-Talk" feature
- 28V DC talk battery
- Background music input
- 25-50 ft talk-back range

Model
HF-3W



- Power supply included
- (1) 25AE Paging Horn included (page 23)

Night Bell Over Existing Paging System

- Provide electronic warble tone over an existing paging system
- Powered by ring signal – no external power supply required
- Terminals for automatic switching between paging audio and warble tone
- Auxiliary relay contacts provided
- Connects to a CO line, analog station, or FXS port via RJ11 or terminals
- Floating 600 Ohm audio output



Model
K-600F

Applications Include: Offices, Clinics, Warehouses, Factories – anywhere people may be working after the receptionist goes home

Universal Telecom Paging Interface

The **FXI-1A** universal paging interface allows you to provide paging from virtually any type of phone system instead of from a microphone. You can also provide background music and electronic night bell over the paging system.

- Power supply included
- Select: FXO (loop start), FXS (ring trip) or paging port (VOX relay) interface mode
- 30V DC talk battery for use with an FXO port or unused trunk input



Model
FXI-1A

- 600 Ohm paging output – mutes music during page

Page Port / Trunk Input / FXO Paging Interface

Provides paging using phones (instead of a microphone) over a PA audio system. VOX relay contacts mute background music for phone systems that don't provide a paging contact (Panasonic®, S.W. Bell®, Intertel®, etc.). If a Paging Port is not available, use an unused trunk input or FXO port.



- Provides 22V DC talk battery for connecting to an unused trunk input or FXO port
- Power supply included

Model
PI-1A

- 600 Ohm output
- VOX switching
- Night Bell
- Mutes music

Phone Line Powered Remote Access Device

The **RAD-1A** remote access device gives authorized users remote access to one way paging amplifiers, digital announcers, and other audio programs.



- Programmable security code and access code
- Separate 600 Ohm audio and telephone line output

Model
RAD-1A

- Programmable call timer and silence time-out
- Relay contacts available for systems that need a dry contact closure


Zone Paging Controller

- Switches line level signal to amplifiers or amplified signal to speakers
- Expand to 8 zones using 2 units
- All-call and group call patterns
- Balanced audio circuitry for low noise
- Input provided for background music

The **ZPI-4** paging system is capable of switching a line level signal (600 Ohms) to amplifiers or an amplified signal to 70V or 8 Ohm speakers. The **ZPI-4** features separate level controls for paging and background music (can be disabled on a per-zone basis). Also provided is a night bell with adjustable volume activated by a dry contact closure or a ringing analog PABX/KSU/FXS station.

Model
ZPI-4


The **ZPI-4** is compatible with ringing analog PABX/KSU/FXS station ports as well as unused trunk/FXO port inputs, and will interface directly with standard paging ports.

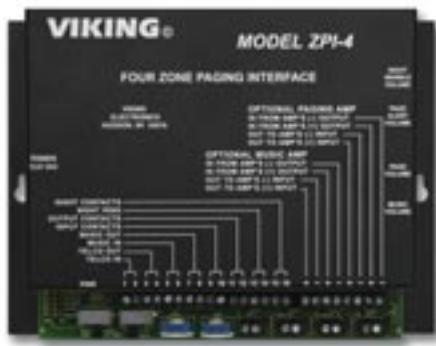


Paging / Ringing Amplifier

- Amplify key phone paging and ringing
- Add speakers to loaded paging systems
- Adjustable volume control
- Powers up to (3) 8 Ohm speakers
- Screw terminal connections
- Power supply included
- One **25AE** Paging Horn included

Model
M2W



70 Volt Paging Speakers and Horns

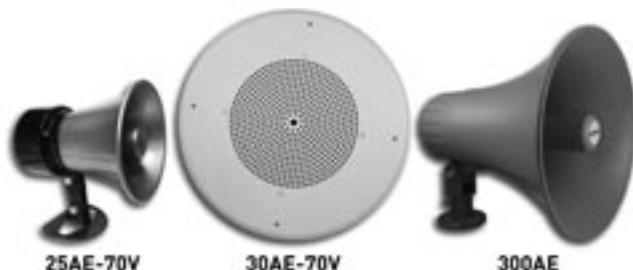

25AE-70V: 10 Watt 70 Volt compact paging horn

30AE-70V: 10 Watt 70 Volt ceiling speaker, mounting hardware included

300AE: 30 Watt 8 Ohm / 70 Volt paging horn for additional volume and voice intelligibility

Model	Description
25AE-70V	70 Volt Paging Horn
30AE-70V	70 Volt Ceiling Speaker
300AE	30 Watt 8 Ohm / 70 Volt Paging Horn

Tile Bridge

Use when mounting Viking ceiling speakers on 2' x 2' or 2' x 4' ceiling tiles

Model
SA-TBA



Compatible Viking models:
30AE, 35AE, 40AE, 30AE-70V, 40-IP, 40TB-IP, SA-1S (not included)

8 Ohm Paging Speakers and Horns



30AE: 6 Watt 8 Ohm ceiling speaker, mounting hardware included

35AE: 6 Watt 8 Ohm ceiling speaker with volume control and mounting hardware included

40AE: 15 Watt 8 Ohm ceiling speaker with a modern look, excellent sound quality, and integral mounting system. Ideal for offices, reception areas, etc.

25AE: 12 Watt 8 Ohm compact paging horn

300AE: 30 Watt 8 Ohm / 70 Volt paging horn for additional volume and voice intelligibility

Model	Description
30AE	8 Ohm Ceiling Speaker
35AE	8 Ohm Ceiling Speaker with Volume Control
40AE	8 Ohm Modern Ceiling Speaker
25AE	12 Watt 8 Ohm Paging Horn
300AE	30 Watt 8 Ohm / 70V Paging Horn

PAGING / NOTIFICATION

Clock Controlled Tone Generator

- Timed single, double, or triple bong or buzzer tones
- Alarm and standard NFPA/ANSI evacuation tones
- Programmable day of week, schedule 1, schedule 2, or off

Provide a paging system with up to 128 events in a 24 hour period in two separate schedules. Different alert tones may be used to indicate start or end of shift, break, lunch, etc. Dry contact closures can activate alarm, fire, evacuation, etc. sounds over paging.



Model
CTG-1A

Single Line Loud Ringers

The **SR-1** and **SRL-1** will generate loud ringing from an analog ringing line or from a dry contact closure. The **SRL-1** also provides bright flashing LED ring indication. There are 4 different ringing sounds to choose from. Loudness is easily adjusted with a volume control and test button.

- Ringing sounds: Warble, Double Gong, Quadruple Chime, Electronic Bell
- Use as a doorbell, a door open sensor, or a "Push for Assistance" button
- Adjustable volume with test button
- Power supply included

SR-1



SRL-1



Model	Description
SR-1	Ringer
SRL-1	Ringer with LED

Audio Isolation Board

The **AIB-1** is a 1:1 isolation transformer that is designed to enable coupling between audio circuits. Line level inputs are available on screw terminals, an RCA jack, and a modular jack. A speaker level input is also available on screw terminals. The line level output is available on screw terminals and RCA jack.

Model	
AIB-1	



Self-Amplified Paging System

The **SA-25** Self-Amplified Paging control unit interfaces with a telecom or IP phone system with a paging port, an analog FXS, or FXO port. The system can provide background music from an external source and generate loud or night ringing from a ringing analog station or contact closure. The **SA-25** is backwards compatible with the older Legacy Valcom® and Bogen® 4-wire self-amplified speakers.

Model	
SA-25	




The **SA-25** can drive a combination of up to 25 self-amplified Viking 2-wire and/or older Legacy 4-wire self-amplified speakers. One **SA-IR** remote and power supply included.

Mass Notification Announcer

- Includes 10 different tones and 5 different user recorded messages
- Securely activate, reset, or live page from a remote phone
- Connect to a phone line, FXS/FXO port, PABX station, or trunk port

The **DNA-510A** digital mass notification announcer provides over 5 minutes of digitally recorded voice emergency instructions and alert tones over your existing paging system from either touch tone commands or five separate trigger inputs. Power supply included.



Model
DNA-510A

NEW

Add Paging and Door Chimes to Your Audio System

Both the **SLP-1** and **SLP-4** allow the user to page family members or co-workers from any phone in your home or small business. Pages are heard over the same speakers installed for multi-zone music distribution. Music is muted during the page and optionally during phone calls. Both units also provide inputs for lighted doorbell switches.

The **SLP-4** has inputs for 4 doorbell switches and allows you to choose between 8 different sounds or upload your own custom wav files, up to 6 minutes total.



Model
SLP-1
SLP-4

SIP Loud Ringer with LED

- Automatic Gain Control (AGC)
- SIP compliant
- PoE powered (class 2, < 6.5 Watts)
- Relay output
- Remote volume control from PC
- LED flashes for visual ring indication

Model	
SR-IP	



Self-Amplified Accessories



Model	Description
SA-IR	Remote
SA-1S	Speaker
SA-1H	Paging Horn
SA-X12	Paging Adapter



SA-1H
Remote
Controlled
Paging
Horn

Primary Clock / Networked Clock Controlled Tone Generator


- Can be programmed to synchronize periodically with your network or internet time
- Can also be used as a Primary Clock to synchronize Viking **CL Series** clocks
- Automatic daylight savings time and leap year correction

Features:

- Up to 14 schedules and up to 1000 events
- 6 minutes of CD quality WAV file record time
- Pre-loaded with common school, business and factory alert tones or program with your own messages/tones over your network
- 4 inputs for triggering emergency fire evacuation, severe weather, lock down and all clear alert tones or messages
- RS-485 output for communicating time sync data when used with Viking **CL Series** wireless analog and digital clocks (below)

The **CTG-2A** is a networked clock controlled tone / message generator designed to provide accurately timed tones and/or messages over your existing paging system. This provides a cost effective way of signaling school period changes, factory shifts, breaks, lunch periods or providing messages at specific times for store sales, promotions, closing times, airport loading zones, etc. The **CTG-2A** can also be used as a primary clock to automatically synchronize Viking **CL Series** clocks. The **CTG-2A** comes with programming software and an Ethernet port to allow PC programming of timed events, schedules, network or internet time synchronization, wave file transfer, message volume, daylight savings time, auxiliary relay control, etc. Power supply included.

Model
CTG-2A

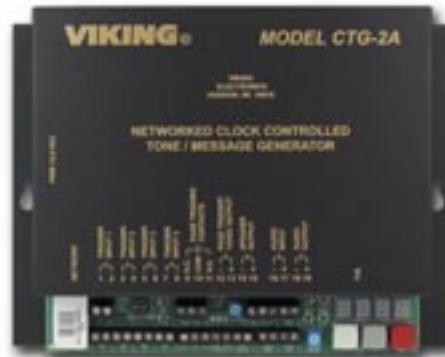

Wireless Synchronized Clocks and Accessories

All clocks have built-in 1/4 Watt repeaters capable of retransmitting the clock sync signal up to 500 ft in open space

Viking's Wireless Clock System provides reliable, accurately synchronized clocks for your entire facility. Eliminating dedicated clock wiring can save you thousands of dollars on installation and also allows for easy retrofitting. The system is comprised of a **CTG-2A** primary clock, a **CL-RFT** clock RF transmitter, and Analog or Digital wireless clocks. The clocks will always display the correct time via updates from the **CTG-2A**.



RF Transmitter / Repeater

The **CL-RFT** transmitter receives time sync data from the **CTG-2A** and transmits to the clocks via 915 to 928 MHz frequency hopping technology. Powerful 1 Watt (30dBm) output communicates up to 6,500 ft. in open space. It can also be configured as a repeater for larger spaces. No FCC license required. Dimensions 11" x 8" x 1.7".

Model	Description
CTG-2A	Primary Clock Controller
CL-A12	12" Analog Clock
CL-A16	16" Analog Clock
CL-D2	2.5" Digital Clock
CL-D4	4" Digital Clock
CL-DMA12	12" Double Mount (Analog)
CL-DMA16	16" Double Mount (Analog)
CL-DMD2	2.5" Double Mount (Digital)
CL-DMD4	4" Double Mount (Digital)
CL-RFT	RF Transmitter / Repeater
CL-SMD2	2.5" Surface Mount (Digital)
CL-SMD4	4" Surface Mount (Digital)
CL-WGA16	16" Wire Guard (Analog)
CL-WGD4	4" Wire Guard (Digital)



Digital Clocks


Wireless bright digital clocks require 120V AC outlet (power supply included). The clocks are updated every minute from the **CTG-2A**. Viking offers a digital clock with a 2.5" tall display (**CL-D2**) and a 4" tall display (**CL-D4**). Shown with optional double mount bracket **CL-DMD2** or **CL-DMD4**.



Analog Clocks

Wireless analog clocks are battery operated and require no wiring. Battery life using two D size Duracell Procell ® batteries is more than 5 years. The clocks are updated every 4 hours from the **CTG-2A**. Clocks can be located up to 6,500 ft. from the **CL-RFT** transmitter/repeater or up to 500 ft. from another synchronized clock.

Viking offers analog clocks in 12" diameter (**CL-A12**) and 16" diameter (**CL-A16**). Shown left with optional double mount bracket **CL-DMA12** or **CL-DMA16**.



Wire Guards


Protect your 12" or 16" analog clock with a sturdy wire guard, model **CL-WGA16**.

Protect your digital clocks with model **CL-WGD4**.

CAUTION: CL Series clocks cannot be used as stand alone clocks. They must be used in conjunction with a CTG-2 or CTG-2A primary clock and one or more CL-RFT transmitters.

Loop Detector Board

The **LDB-1** provides a contact closure when used in series with telecom devices on an analog phone line. Analog PABX, CO line or FXS port powered. Optional **PS-2** power supply for switched power (sold separately).



Model
LDB-1

Loop and/or Ring Detector

The **LDB-2** Ring/Loop Detector monitors an analog phone line for ringing and/or in use condition. Two sets of relay contacts are activated when these conditions are detected. When monitoring for ring, the relay can be adjusted to stay on steady or follow a ring cadence. A 12V DC output is provided. Power supply included.




Model
LDB-2

Advanced Loop and/or Ring Detector

The **LDB-3** monitors an analog phone line, PABX or FXS line and provides a normally open or normally closed contact during ringing, off hook, or both. The unit can also provide a 12V DC 350 mA output for strobe lights.

The **LDB-3** can follow the ring cadence or stay on steady during ring. It can be set up not to activate from the "Info" button on two-button phones, ie: Viking model **E-1600-20A** (page 9). Power supply included.

Model
LDB-3



Time Delay Relay

The **TDR-1** can be programmed to produce one of 8 closure times from 0.5 to 20 seconds. It can also be set up as a delay on operate relay. The **TDR-1** accepts positive or negative-going logic level voltage or a contact closure.

Features selectable timed closure/delay and LED status indicator. Power supply included.

Model
TDR-1



Line Powered Ringer

This auxiliary electronic ringer operates on any analog line that provides a minimum of 40 Volts 20-30 Hz AC ring voltage. Nominal 3 KHz warble provides up to 92 dB SPL @ 1 meter.

The **LPR-1** can be connected via screw terminals or modular RJ-11 jack. A volume control and a 7 foot modular cord are provided. No power supply is required.

Model
LPR-1



Panasonic® Doorphone Station Adapter

The **PAN-1A** allows a Viking speaker phone (**E-10A, E-20B, E-30, E-35, E-40, E-50, E-60, E-65, E-70, E-75**, etc. pages 43 & 45) to be connected in place of Panasonic® KX-T30865 or KX-T7775 Doorphone. Power supply included.

Model
PAN-1A




Multi-Tone Generator

The **MTG-10** can be connected to a paging source, phone system's paging port or background music. When a contact closure is provided to one of the inputs, the paging or background music is faded out and the appropriate tone is generated over the paging system. The siren and the evacuation whoop have priority and override any other tone.

Alternatively, the **MTG-10** can be configured to provide a tone every 15 seconds to notify callers that the call is being recorded. Power supply included.


Model
MTG-10



CPC Disconnect

The **CPC-1** and **CPC-4** provide a momentary (1 second) break in the line current to signal telephone equipment the calling party has hung up. They generate the disconnect signal after detecting busy, fast busy, return to dial tone, or silence. Available in 1 line (**CPC-1**) and 4 line (**CPC-4**) models. Phone line powered.

Model	Description
CPC-1	1 Line
CPC-4	4 Line



Amplified Remote Access Device

The **RAD-AMP** extends the usefulness of your phone system to remote employees, as well as providing call forwarding to remote employees or locations.

As a Telecommuting Extender, the **RAD-AMP** gives remote workers access to most PABX/KSU features from their home or cell phone.

Model
RAD-AMP



As a Line Extender, the **RAD-AMP** provides authorized users remote access to PABX, Centrex or Electronic Key system features.

As a Call Diverter, the **RAD-AMP** provides call forwarding from one location to another.

Talk Battery and Ringing Power Supply

The **PS-48-RGA** power supply provides talk battery plus standard ring voltage where and when needed. The **PS-48-RGA** will provide telephone communication equipment with 48V DC talk battery, and will also produce 90V 20 Hz sine wave ring voltage rated up to 10 REN.


Model
PS-48-RGA



Telephone Line Toll Restrictor

- 0.5 to 49.5 minute call timer with disconnect
- 6-digit bypass code
- Allows emergency and toll free numbers
- Programmable to ignore phone system line access numbers
- Programmable allow or restrict table stores up to (40) 12-digit phone numbers, prefixes or area codes

Model
TR-1



PC to Phone Line Interface

The **PB-100** connects to a serial or USB port on your PC and also to an analog phone line. The **PB-100** accepts ASCII commands to seize the phone line, watch for busy, and to send and receive touch tones or data. If the PC is equipped with a sound card, the audio input and output can be coupled to the phone line as well.

Software downloads are available to do emergency phone polling and hotel/motel wake up dialer.

Model
PB-100

- Hotel / Motel wake up applications
- Viking emergency phone polling / programming applications
- Power supply included

Door Bell Panels

The **DB40** Door Bell Button Panels permit the user to install a simple door bell button

- Fits any standard single gang box
- Panels made from durable plastic
- Weather resistant gasket included
- Screw terminals for easy wiring
- Available in dark brown or off-white



- Use with the Viking model **VE-3x5** enclosure for surface mounting, sold separately (page 34)

Speaker Volume Control

- Adjust the volume of individual paging horns, ceiling or wall speakers
- Compatible with one-way 8 Ohm and/or 16 Ohm speakers
- Mounts in standard single gang electrical box
- Not recommended for two-way (talk-back) paging applications



Model
SV-5W

Toggle Switch

The **NS-1** is a simple on/off toggle switch mounted in a convenient plastic case. The **NS-1** can be used with Viking products that have a "Night Switch" input or any product that requires an external switch closure.

The **NS-1** is easy to install almost anywhere: in a phone closet or at a front desk.



The **NS-1** has 24" wires and comes with two quick connectors.



EW

Digital Voice Announcer with 7.5 Minutes of Record Time

- Built-in 2 Watt amplifier to drive up to three 8 Ohm speakers or horns
- AGC for recording from handset, tape, CD, PC soundcard, etc.
- 4 professional on-hold messages included
- Recording can be on-site or in a professional studio
- Three playback options
- Non-volatile memory
- Monitor recording from a standard handset
- 600 Ohm audio output for high wattage amplifiers
- Multiple message capabilities
- Auxiliary audio (MOH) input for background music between messages
- Remote trigger input for on-demand playback from a remote momentary contact closure
- Optional press and hold play mode

The **DVA-2WA** is a digital announcer / recorder with a built in 2 Watt amplifier. Designed to provide music and promotion on hold, the **DVA-2WA** can playback in a continuous loop or alternate between promotions and an auxiliary music source at 2 second to 30 minute intervals. Any number of multiple messages may be recorded.

The **DVA-2WA** may also be played at the push of a button for museum displays, information booths, point of interest locations, retail applications, etc.

The **DVA-2WA** has non-volatile memory. This provides the convenience of recording at the shop or professional studio and then shipping to the installation site.

Model
DVA-2WA



Applications:

On-Hold Promotion Messages and Background Music

Message Repeater for:

- Museum and information displays
- Car rental "Leave the keys in the ignition..."
- Airport "Loading and unloading only..."
- Smoking "This is a non-smoking building..."
- Amusement Parks "Please keep your hands in the vehicle at all times..."
- Retail "Blue light special in aisle 5..."

4 Port Automatic Call Routing Switch

The **FAXJ-1000** is a versatile phone / data / fax switch with the ability to automatically route calls via fax CNG tone, central office distinctive ring, or touch tones included in the dial string by the calling party. In addition, the **FAXJ-1000** offers full manual transfer capabilities.

The **FAXJ-1000** stores and retransmits caller ID information so that it is truly caller ID compatible.

- Four ports allow any four analog devices to share a single line
- Routes calls via CNG tone, distinctive ringing, touch tones sent by calling device or manually
- Provides realistic ring-back tones while re-ringing selected device
- Transfer incoming calls from one port to another as often as may be required during the same call
- Caller ID information is stored and retransmitted during transfer
- Automatic "privacy" eliminates interruptions on both inbound and outbound calls
- Monitors for calling party control (CPC)
- All in and outbound calls are routed to the phone 1 port during a power failure
- Manual mode will not interfere with CO provided voice mail
- Ports are balanced to prevent noise on long runs
- Compatible with high-speed modems
- Surge protection on both power and phone line
- Internal Call Mode

Model
FAXJ-1000



Applications

- **Fax Machines:** Retail, Commercial, Industrial, Government, Home Office
- **Modem Terminals:** Computers, Vending Machines, Remote Access Applications
- **Point-of-Sale Terminals:** Fast Food Chains, Retail Stores, Convenience Stores

Two-Way Ringdown Circuit

- Compatible with fax machines and modem speeds up to 28.8 kbps
- Precise dial tone
- Switch selectable ring cadence
- Provides CPC breaks after hang-up on either port
- Switch selectable audio attenuation
- Can provide 2 seconds of precise dial tone before ringdown
- Provides ring back signal to calling device
- One or two way ring down capability
- Switch selectable ring count
- Ringdown and dial tone off mode (ideal for prison phone communications, etc.)
- 32V DC talk battery

The **DLE-200B** Line Simulator produces two way communication between standard telecom products such as modems, fax machines, Key Systems, PABX's and standard single line telephones. The Line Simulator can also provide sales people with a cost effective, easy to use method of conducting on site demonstrations, eliminating the need to locate phone lines and disrupt the customer's phone service.

Model
DLE-200B

The **DLE-200B** Line Simulator provides precise dialtone, DC talk battery and standard or distinctive ringing. The unit also provides a CPC break on hang up.



Applications

- Dedicated point-to-point communication
- Demonstrate and program equipment
- Prison phones
- Inter-system communication

Advanced Ringdown Circuit

- 911 mode for classroom training
- Provides name and number caller ID
- Touch tone detection or standard Ringdown
- Precise dial tone, ringback, busy, reorder, and S.I.T. tones
- Audio jack for amplified speaker or loading voice mail systems

The **DLE-300** simulates loop start phone lines and allows two-way communication between telecom devices or systems. It provides standard or distinctive ringing (6 REN) and 40V DC talk battery. Power supply included.

Model
DLE-300



Maximum loop length per port:
6,864 feet using 24 gauge twisted pair

Subscribe to our
YouTube
channel!

- >> Product info
- >> Programming help
- >> Tech knowledge
- >> Industry trends

CHECK
IT OUT >>



Power Fail Bypass / Ground to Loop Start Converter

Continue to receive your calls, even if the phone system is down. The **PF-6A** bypass unit connects 6 analog single line station phones directly to the CO lines when power is lost or on an alarm contact closure. When the system is restored, calls in process will not be interrupted.

- Prevents busy signals or unanswered calls during power and system failures



- Loop or ground start
- Automatic ground start converter for outbound calls
- Power supply included

Model
PF-6A

Blue Strobe / Beacon Kit

- High intensity long life LED technology
- 4 programmable flash patterns
- 6 programmable brightness settings
- Monitors analog lines for ringing and/or off hook or activate with a contact closure
- Program strobe to flash steady or follow ring cadence
- Use with Viking emergency phones (pages 7-12) or any analog phone



Replacement Lens
Available in 5 Colors:

Visit the online **SPARE PARTS STORE**, see below for info.

Model	Description
BLK-4	Standard model, for indoor use
BLK-4-EWP	Includes Enhanced Weather Protection

Line Powered Indication

The model **LPL-1** connects to any standard analog phone line to indicate "Ring" (visual flashing), "On the Phone" (steady on) or "Message Waiting" (fast flash) indication*.

The large flashing LED can be seen up to 100 feet away. When used with a headset on an analog phone, you can end interruptions when associates don't realize you are on the phone. Phone line powered.

*When installed on phone systems with standard 90V DC message waiting voltage.



Model
LPL-1

Note: Will not detect stutter dial tone (use model **VR-1B** right).

Blue Strobe Light

- High intensity long life LED technology
- 4 programmable flash patterns
- 6 programmable brightness settings
- Requires 12V DC power



Replacement Lens
Available in 5 Colors:

Visit the online **SPARE PARTS STORE**, see below for info.

Model	Description
SL-2	Standard model, for indoor use
SL-2-EWP	Includes Enhanced Weather Protection

Phone Status Indicator

Bright 0.75" LED visible over 100 feet, power supply included

Analog Phones: Flashing LED indicates "Ringing", steady LED indicates "On the Phone" and stutter flash indicates "Message Waiting" stutter dial tone is detected. Will also follow the cadence of 90-125V DC message waiting voltage.



Electronic Phones: Flashing LED eliminates guessing whose phone is ringing. Connect to electronic phone's speaker.

Headsets: Flashing LED ends interruptions by indicating that you are "On the Phone". Special T adapter provided.

Model
VR-1B

Ideal for: Telemarketing, Offices, Customer Service, Message Waiting, Cubicles, Technical Support, etc.

Lose a screw? Need another cord?
Can't find your power supply?

WE GOT YOU COVERED!

Replaceable parts for our products can be purchased securely through our online Spare Parts Store:

<https://store.vikingelectronics.com/>

Don't see what you need?

Give us a call:

715-386-8666

SCAN TO VISIT THE SPARE PARTS STORE >>



Ring Shape Conditioner and Power Booster

Viking's Ring Boosters are designed to reshape and increase the ringing power of an existing analog line, PABX extension, FXS port, IP phone system analog port or any other telecom device which provides ringing. The units duplicate the incoming ring cadence, allowing compatibility with custom ringing features.

Each line is capable of ringing four 1 REN or eight 0.5 REN telephones and does not affect normal operation of the telephone line or features, such as distinctive ring, caller ID, call waiting, hookswitch flash features, CPC signaling, etc. Viking offers four sizes to fit many different applications.

- True Sine wave ring signal output
- Boosts ring to 4 REN per line
- Caller ID compatible
- Reshapes troublesome square wave ringing
- Will not affect normal line operation
- Model **RG-224** connects directly to CISCO® VG224

Model	Description
RG-4	1 Line - Wall Mount
RG-204	4 Lines - Wall Mount
RG-224	24 Lines - Rack Mount



Ring Booster

- Boosts ring power to 12 REN
- Ring up to 12 additional phones
- Caller ID compatible
- Easy modular installation
- Compatible with distinctive ringing services



Model
RG-10A

- Will not affect normal line operation
- Reshapes troublesome square wave ringing
- Capable of boosting talk battery and loop current

Talk Battery Booster

The **TBB-1B** will boost talk battery and loop current on a single analog PABX station, CO line or VoIP ATA FXS port.

This is helpful for powering line powered devices, such as dialers and emergency phones on low voltage and/or loop current extensions and X-10 wireless phone jacks.

- Screw terminal connections for easy installation
- Boost loop current to 26mA
- Boost talk battery to 48V DC
- Power supply included



Model	Price
TBB-1B	\$73

Long Loop Adapters

Viking's Long Loop Adapters extend analog station loop length to 30,000 feet. The **LLA-1** and **LLA-4** provide long line and off premise extension (OPX) capabilities for PABX and KSU analog stations, ISDN terminal adapters, channel banks, etc. The units are compatible with pulse dialing, touch tone dialing, hook switch flash features, CPC signaling, and Caller ID features. A ground screw terminal allows for improved surge protection and connection to an earth ground reference for the regenerated line.

- Convert an analog KSU/PABX station to a standard voltage OPX
- Provides 48V DC talk battery
- Provides 20 Hz, 10 REN sine wave ringing
- Electrically isolates PABX station from extended loop



LLA-1 (Replacement for Proctor® model 46222)

Model	Description
LLA-1	1 Line
LLA-4	4 Lines



LLA-4 (Replacement for Proctor® model 46224)

VE-5x5 Series Surface Mount Boxes




The **VE-5x5 Series** of surface mount boxes add vandal and weather resistance to many of Viking's 5" x 5" flush mount entry phones and emergency phones.

- Surface mount to a wall, post, single or double gang electrical box

- Finishes: Heavy duty steel with black, red, white or yellow powder coating or brushed stainless steel
- Compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 34)

Model	Finish	Description
VE-5x5	Black	1.0" Rain Guard
VE-5x5-RD	Red	1.0" Rain Guard
VE-5x5-SS	Stainless	1.0" Rain Guard
VE-5x5-WH	White	1.0" Rain Guard
VE-5x5-YL	Yellow	1.0" Rain Guard
VE-5x5-NR	Black	No Rain Guard
VE-5x5-NR-RD	Red	No Rain Guard
VE-5x5-NR-SS	Stainless	No Rain Guard
VE-5x5-NR-WH	White	No Rain Guard
VE-5x5-NR-YL	Yellow	No Rain Guard

VE-5x5-PNL Series Blank Panel Boxes

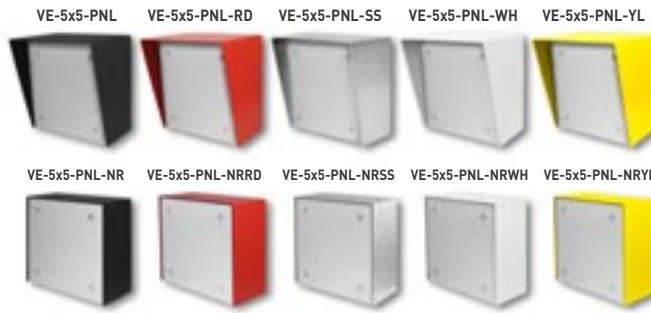

The **VE-5x5-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder

coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-5x5-PNL Series** can be used with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 34 for more info).

Model	Finish	Description
VE-5x5-PNL	Black	1.0" Rain Guard
VE-5x5-PNL-RD	Red	1.0" Rain Guard
VE-5x5-PNL-SS	Stainless	1.0" Rain Guard
VE-5x5-PNL-WH	White	1.0" Rain Guard
VE-5x5-PNL-YL	Yellow	1.0" Rain Guard
VE-5x5-PNL-NR	Black	No Rain Guard
VE-5x5-PNL-NRRD	Red	No Rain Guard
VE-5x5-PNL-NRSS	Stainless	No Rain Guard
VE-5x5-PNL-NRWH	White	No Rain Guard
VE-5x5-PNL-NRYL	Yellow	No Rain Guard

VE-6x7 Series Surface Mount Boxes

The **VE-6x7 Series** of surface mount boxes add vandal and weather resistance to Viking's **K-1700 Series** analog entry phones and **K-1700-IP Series** VoIP entry phones (page 38).

- Finishes: Heavy duty steel with black powder coating or brushed stainless steel
- Surface mount to a wall, post, single or double gang electrical box
- Compatible with Viking's **VE-GNP** gooseneck pedestals (page 34)



Model	Finish	Description
VE-6x7	Black	1.0" Rain Guard
VE-6x7-SS	Stainless	1.0" Rain Guard
VE-6x7-NR	Black	No Rain Guard
VE-6x7-NR-SS	Stainless	No Rain Guard

VE-6x7-PNL Series Blank Panel Boxes

The **VE-6x7-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-6x7-PNL Series** are compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see page 34).



Model	Finish	Description
VE-6x7-PNL	Black	1.0" Rain Guard
VE-6x7-PNL-SS	Stainless	1.0" Rain Guard
VE-6x7-PNL-NR	Black	No Rain Guard
VE-6x7-PNL-NRSS	Stainless	No Rain Guard

SURFACE MOUNT BOXES/ACCESSORIES / PEDESTALS

VE-5x10 Series Surface Mount Boxes

The **VE-5x10 Series** of surface mount boxes add vandal and weather resistance to any of Viking's 5" x 10" flush mount analog or IP phones.

- Finishes: Heavy duty steel that is primer powder coated then top coated with textured black or available in brushed 316 marine grade stainless steel
- Surface mount to a wall, post, single or double gang electrical box
- Compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see below for more information)




Model	Finish	Description
VE-5x10	Black	1.0" Rain Guard
VE-5x10-SS	Stainless	1.0" Rain Guard
VE-5x10-NR	Black	No Rain Guard
VE-5x10-NR-SS	Stainless	No Rain Guard

VE-5x10-PNL Series Blank Panel Boxes

The **VE-5x10-PNL Series** is designed to surface mount a custom switch, keypad, or card reader.

The blank front panel is made from aluminum, making it easy to drill, cut or form. The panel is straight lined and coated with a tough clear powder coating to resist corrosion. Four screws and a gasket are included for easy installation.

The **VE-5x10-PNL Series** is compatible with any of Viking's **VE-GNP Series** gooseneck pedestals (see below for more information).

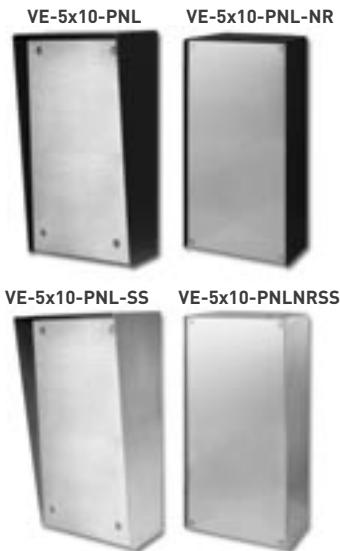

Model	Finish	Description
VE-5x10-PNL	Black	1.0" Rain Guard
VE-5x10-PNL-SS	Stainless	1.0" Rain Guard
VE-5x10-PNL-NR	Black	No Rain Guard
VE-5x10-PNLNRSS	Stainless	No Rain Guard

VE-3x5 Surface Mount Box

The **VE-3x5** surface mount box adds versatility to Viking's **E-40** or **E-50 Series** Entry Phones (page 45).

- Heavy duty steel
- UV stable black fine texture powder paint
- Surface mount

Model
VE-3x5



Accessories

VE-LIGHT: Add bright LED illumination to products in a Viking surface mount box with a rain guard.

VE-RMB: Attaches to the plastic junction box supplied with some Viking doorboxes and entry phones. Allows mounting when no wall stud or support beam is accessible.

261653: Double gang box adapter kit allows double gang mount products to be mounted in a **VE-5X5** surface mount box.

Model	Description
VE-LIGHT	LED Kit
VE-RMB	Retrofit Kit
261653	Double Gang Box Adapter Kit



Gooseneck Pedestals

The gooseneck pedestals are designed to be used with select Viking surface mount boxes. Ideal for drive up communications, the gooseneck pedestals are constructed of heavy duty black powder painted steel or stainless steel.

Pad mount to a floor or concrete with 4 available bolt holes or use the **VE-GNP-IG** to mount in-ground or in wet cement.

Model	Pad Mount
VE-GNP	Black Finish Pad Mount
VE-GNP-SS	Stainless Steel Pad Mount

VE-GNP-IG
Black Finish
In-Ground

VE-GNP-2
Black Finish
Dual Height
Pad Mount



E-1600A-MK-GNP

Mounting kit for attaching the **E-1600A** and **E-1600-IP** Emergency Phones to a Viking gooseneck pedestal.

Model
E-1600A-MK-GNP

Enclosures for Installing Products Outdoors

Added Protection for Viking Emergency Phones, Entry Phones, Doorboxes or other devices

The **VE-9x12** series of outdoor enclosures provide the ultimate in weather protection for your Viking product or other device.

The **VE-9x12** enclosures are constructed of durable UV stable polycarbonate / ABS composite to provide years of outdoor service. The heavy-duty doors are labeled "Telephone" and have a gasket seal to keep out even the harshest weather. Choose from 3 internal adapter panels that allow mounting many different Viking products.

Models **VE-9x12R-0P**, **VE-9x12Y-0P**, and **VE-9x12B-0P** come without an internal adapter panel, ideal for mounting non-Viking equipment or the new **E-1600-912** Emergency Phone (page 10). These enclosures are available in all three colors and include a separate "Telephone" label.

Applications Include:

- Parking Lots
- Playgrounds
- Campuses
- Maintenance Areas
- Swimming Pools
- Roadside Help Areas
- Hospitals
- Building Exteriors
- Fueling Stations

Model	Color	Description
VE-9x12R-0P	Red	Enclosure with No Adapter Panel
VE-9x12R-1P	Red	Enclosure with Adapter Panel 1
VE-9x12R-2P	Red	Enclosure with Adapter Panel 2
VE-9x12R-3P	Red	Enclosure with Adapter Panel 3
VE-9x12Y-0P	Yellow	Enclosure with No Adapter Panel
VE-9x12Y-1P	Yellow	Enclosure with Adapter Panel 1
VE-9x12Y-2P	Yellow	Enclosure with Adapter Panel 2
VE-9x12Y-3P	Yellow	Enclosure with Adapter Panel 3
VE-9x12B-0P	Black	Enclosure with No Adapter Panel
VE-9x12B-1P	Black	Enclosure with Adapter Panel 1
VE-9x12B-2P	Black	Enclosure with Adapter Panel 2
VE-9x12B-3P	Black	Enclosure with Adapter Panel 3



VE-9x12R-0P VE-9x12Y-0P VE-9x12B-0P

- Designed to meet NEMA / EEMAC Type 4 / 4X / 12 requirements
- Constructed of heavy-duty UV stable polycarbonate / ABS composite with flame-retardant UL 94 V-0 rating
- Drip guard and gasket sealed door
- 0.020" thick stamped aluminum "Telephone" label with scratch resistant UV stable clear coat
- Mounting holes for standard RJ11 wall plate: adapter panel 1
- Optional **VE-SPG** door return hinge spring available
- Optional **VE-PBL** push button lock and key set available
- Red "Emergency" label available
- Adapter panels are also available for purchase separately



NEW Emergency Phone Fits in Viking Enclosures

The **E-1600-912A** (analog) and **E-1600-912-IP** (VoIP) panel phones are specifically designed to fit seamlessly within Viking's **VE-9x12** Enclosures. Ideal for both indoor and outdoor swimming pool areas, or any location requiring a protected emergency phone.

For more info on this Emergency Phone, see page 10.

Phone shown in
Red Enclosure
(VE-9x12R-0P)
sold separately



Enclosure Accessories

VE-PBL: Push button lock and key set for any **VE-9x12** enclosure.

VE-SPG: Hinge door return spring for use with the **VE-9x12**.

VE-9x12MK-1: Internal adapter panel 1 for the **VE-9x12**.

VE-9x12MK-2: Internal adapter panel 2 for the **VE-9x12**.

VE-9x12MK-3: Internal adapter panel 3 for the **VE-9x12**.

261529: Red "Emergency" label for any **VE-9x12** enclosure.

Model	Description
VE-PBL	Push Button Lock
VE-SPG	Door Return Spring
VE-9x12MK-1	VE-9x12 Internal Adapter Panel 1
VE-9x12MK-2	VE-9x12 Internal Adapter Panel 2
VE-9x12MK-3	VE-9x12 Internal Adapter Panel 3
261529	Red "Emergency" Label



261529
Red "Emergency"
label for **VE-9x12**



VE-9x12MK-1
Internal adapter
panel 1



VE-9x12MK-2
Internal adapter
panel 2



VE-9x12MK-3
Internal adapter
panel 3



VE-PBL
Push button lock
and key set



VE-SPG
Hinge door
return spring

DOORBOX CONTROLLER and DOORBOXES

Door Entry and Camera Controller

The **C-1000B** allows single line phones or phone systems to share a phone line with one or two Viking **W-Series** doorboxes. The **C-1000B** provides two touch tone controlled relays to operate door strikes or gate openers and provides doorbox triggered CCTV camera switching. Viking doorboxes can be used on single line residential or home office applications as well as on fully loaded systems, when used with a **C-1000B**.

- Allows two Viking **W-Series** doorboxes to share a single telephone line with a residential or business telephone system
- Custom ringing mode to distinguish doorbox calls from CO calls
- Provides (2) touch tone controlled NO or NC relay contacts (5 Amp rating) for door strikes or gate openers
- Calls can be placed on hold when visitors call from the doorbox

Model

C-1000B

- Doorbox triggered CCTV camera switching
- Call waiting tones indicate which doorbox is calling and distinguish a doorbox call from a CO line call
- Built-in talk battery for "No CO Line" applications
- Compatible with Viking's Single Line Paging Controllers, model **SLP-1** or **SLP-4** (page 24)
- Keyless entry/postal lock input
- Auxiliary contact output for doorbell, light, etc.



Compatible with one or two of these Viking doorbox models (see below):

W-1000	W-3000
W-1000-EWP	W-3000-EWP
W-2000A	W-3005
W-2000A-EWP	W-3005-EWP

Analog Handsfree Doorboxes

Viking's handsfree doorboxes are available in four different chassis configurations and are designed to interface directly with an unused trunk input/FXO port of a phone system. One or two doorboxes can also share an existing phone line when used with a **C-1000B** doorbox controller. When the "Call" button is pressed, the doorbox generates a standard or custom ring cadence.

Answer Your Door or Gate from Any Phone in Your Home or Business

- Connect to a phone system's unused trunk input, FXO port or a Viking **C-1000B** controller (above)
- Blue LED call progress/night light on **W-1000**, **W-3000** and **W-3005**
- Adjustable microphone and speaker volume controls
- 40V DC talk battery
- 20 Hz ring generator (6.0 REN ring load maximum)
- Selectable ring cadence and number of rings
- Selectable "Push-to-Talk" feature for noisy environments
- Operating temperature range: -15°F to 130°F
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating, see page 28
- **W-3005** features a built-in analog color video camera with wide viewing angle and tilt /swivel adjustments
- **W-3005** can use one CAT 5e cable for audio and video transmission

Model	Description	EWP	Camera
W-1000	Flush Mount Black Doorbox		
W-1000-EWP	Flush Mount Black Doorbox	•	
W-2000A	Surface Mount Doorbox		
W-2000A-EWP	Surface Mount Doorbox	•	
W-3000	Flush Mount Stainless Steel Doorbox		
W-3000-EWP	Flush Mount Stainless Steel Doorbox	•	
W-3005	Flush Mount Stainless Steel Video Doorbox		•
W-3005-EWP	Flush Mount Stainless Steel Video Doorbox	•	•



W-1000

Faceplate: Vandal resistant louvered aluminum with weather resistant black textured powder paint.

Mounting: Flush mount or use an optional Viking Surface Mount Box sold separately (page 33).



W-2000A

Chassis: Impact resistant, UV stable light grey plastic with black UV stable printed graphics.

Mounting: Surface mount to a single gang box or a 4x4 junction box.



W-3000

Faceplate: Vandal resistant louvered 316 marine grade stainless steel with laser etched graphics.

Mounting: Flush mount or use an optional Viking Surface Mount Box sold separately (page 33).



W-3005

Faceplate: Vandal resistant louvered 316 marine grade stainless steel with laser etched graphics.

Mounting: Flush mount or use an optional Viking Surface Mount Box sold separately (page 33).

12 Button Entry Phones with Built-In Directories

Features

- Analog or VoIP models
- Each button speed dials up to two 20-digit phone numbers
- Easy one button push operation
- Integrated relays for door strike and camera control
- Built-in custom tenant directory
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating
- Flush mount with the included zinc plated steel rough-in box
- Optional Surface Mount Boxes available (page 34, sold separately)
- Heavy-duty louvered 316 marine grade stainless steel faceplate
- Permanent laser etched graphics
- Heavy duty sealed metal keypad
- T-10 Torx security mounting screws

Analog Models

- Interface to a CO line, analog PABX station, or FXS port
- Hangs up on CPC, busy, silence, time-out or dial tone
- Operates on 12-24V AC/DC (12V DC adapter provided)
- 50 keyless entry codes
- Selectable auto-answer feature for monitoring
- Postal lock input
- Touch tone restriction from microphone
- Use with model **C-1000B** (page 36) for increased security
- Compatible with model **C-3000** (page 40) for "No CO" (phone line) operation
- Operating temperature: -30° F to 150° F

VoIP Models

- SIP compliant and PoE powered (class 2, <6.5 Watts)
- Two sets of NO or NC relay contacts (2 Amp rating) for camera or door / gate control
- Blue "Call/Status" LED indicator
- Automatic Noise Canceling (ANC) feature for proper operation in noisy environments
- Network downloadable firmware
- Program up to 1,000 keyless entry codes and/or proximity card numbers
- Keyless entry codes and proximity numbers can be programmed to only allow access at specific times and/or days of the week
- Event logging with time and date stamp
- Hangs up on busy, time-out or touch tone command
- Remotely programmable
- Programmable microphone and speaker volume
- Selectable auto-answer feature for monitoring
- Operating temperature: -40°F to 140°F

Model	Analog	VoIP	EWP	Camera	Proximity
K-1200	•				
K-1200-EWP	•		•		
K-1200-IP		•			
K-1200-IP-EWP		•	•		
K-1205	•			•	
K-1205-EWP	•		•	•	
K-1205-IP		•		•	
K-1205-IP-EWP		•	•	•	
K-1270	•				•
K-1270-EWP	•		•		•
K-1270-IP		•			•
K-1270-IP-EWP		•	•		•
K-1275	•			•	•
K-1275-EWP	•		•	•	•
K-1275-IP		•		•	•
K-1275-IP-EWP		•	•	•	•

K-1200 Series



- Entry phone with built-in 12 button keypad
- Brushed stainless steel finish

K-1205 Series



- Built-in analog color video camera
- 420 lines of resolution and 80° viewing angle
- Tilt and swivel adjustment

K-1270 Series



- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (page 39)

K-1275 Series



- Built-in analog color video camera
- Built-in proximity reader
- Compatible with Viking proximity credentials (page 39)

Compact Analog Color Video Camera Kits

The **VCAM-1** features tilt and swivel adjustment, stainless steel mounting hardware, potted circuit board, 12V DC adapter/wire connections.



The **VCAM-1IR** is designed to be used with IR illuminators (not included).

Model
VCAM-1
VCAM-1IR

Single Gang Analog Video Camera

- Fits in a standard single gang box
- Wide viewing angle
- Enhanced Weather Protection (EWP)
- Power supply included
- Replacement faceplates available
- Compatible with **VE-3x5** Surface Mount Box (page 34)

Model	Description
VCAM-2-SS	Stainless Camera Panel
VCAM-2-BN	Bronze Camera Panel
PNL-VCAM-2-SS	Stainless Faceplate only
PNL-VCAM-2-BN	Bronze Faceplate only



Handsfree Entry Phones with Built-In Keypads

Features

- Analog or VoIP models
- Two finishes: Brushed Stainless Steel or Oil Rubbed Bronze (BN)
- Enhanced Weather Protection (EWP) models available, see page 28
- Blue "Call / Status" LED indicator
- Flush mount with the included zinc plated steel rough-in box
- Optional Surface Mount Boxes available for all models on this page (see page 33, sold separately)
- Louvered stainless steel faceplate
- Permanent laser etched graphics on stainless steel models
- Stainless steel "Call" button
- Heavy-duty sealed metal keypad
- T-10 Torx security mounting screws

Analog Models

- Telephone line powered
- Interface to a CO line, analog PABX station, or FXS port
- Advanced call progress detection: disconnects on busy signal, return to dial tone, CPC, reorder tone, call time-out, and 40 second silence time out
- Auto-answer feature for monitoring
- Selectable push button disconnect
- Adjustable mic and speaker volumes
- Programmable VOX (microphone /speaker) switching speed
- Operating temperature: -20°F to 130°F

Compatible Viking Controllers

C-500 (page 42)	C-4000 (page 40)
C-2000B (page 42)	K-1900-3 (page 40)
C-3000 (page 40)	SRC-1 (page 41)

VoIP Models

- Two sets of NO or NC relay contacts (2 Amp rating) for door / gate control
- SIP compliant and PoE powered (class 2, <6.5 Watts)
- Automatic Noise Canceling (ANC) feature for proper operation in noisy environments
- Network downloadable firmware
- Speed dial up to 250 primary numbers
- Cycles to rollover number on busy or no-answer
- Program up to 1,000 keyless entry codes and/or proximity card numbers
- Keyless entry codes and proximity card numbers can be programmed to only allow access at specific times and days of week
- Event logging with time and date stamp
- Remotely programmable
- Programmable microphone and speaker volumes
- Operating temperature: -40°F to 140°F

Controller Built-in

Model	Finish	Analogy	VoIP	EWP	Camera	Proximity
K-1700-3	Stainless	●				
K-1700-3-EWP	Stainless	●		●		
K-1700-3-BN	Bronze	●				
K-1700-3-BN-EWP	Bronze	●		●		
K-1700-IP	Stainless		●			
K-1700-IP-EWP	Stainless		●	●		
K-1700-BN-IP	Bronze		●			
K-1700-BN-IPEWP	Bronze		●	●		
K-1705-3	Stainless	●			●	
K-1705-3-EWP	Stainless	●		●	●	
K-1705-3-BN	Bronze	●			●	
K-1705-3-BN-EWP	Bronze	●		●	●	
K-1705-IP	Stainless		●		●	
K-1705-IP-EWP	Stainless		●	●	●	
K-1705-BN-IP	Bronze		●		●	
K-1705-BN-IPEWP	Bronze		●	●	●	
K-1770-IP	Stainless		●			●
K-1770-IP-EWP	Stainless		●	●		●
K-1770-BN-IP	Bronze		●			●
K-1770-BN-IPEWP	Bronze		●	●		●
K-1775-IP	Stainless		●		●	●
K-1775-IP-EWP	Stainless		●	●	●	●
K-1775-BN-IP	Bronze		●		●	●
K-1775-BN-IPEWP	Bronze		●	●	●	●

Surface Mount Options

The VE-6x7 Series (page 33) of surface mount boxes add vandal and weather resistance to the K-1700 Series and K-1700-IP Series entry phones. Surface mount boxes can be used with Gooseneck Pedestals (page 34).



K-1700 Series

- Entry phone with built-in keypad.
- Stainless steel model (left) shown in optional VE-6x7 Surface Mount Box (see page 33, sold separately)



K-1705 Series

- Built-in analog color composite video camera
- 420 lines of resolution and 80° viewing angle
- Tilt and swivel adjustment



K-1770 Series

- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (see page 39)



K-1775 Series

- Built-in analog color video camera
- 420 lines of resolution and 80° viewing angle
- Built-in proximity reader
- 125KHz compatible 26-bit Wiegand format
- Compatible with Viking proximity credentials (see page 39)

PROXIMITY READERS and CREDENTIALS

125 KHz Proximity Reader

- Standard 26-bit Wiegand interface
- Use with Viking **PRX-C**, **PRX-C-ISO**, **PRX-FOB**, **LRT-4**, certain legacy HID® proximity protocols* and certain AWID 125KHz proximity protocols**
- Comes with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating
- Compact size mounts to mullion / door frame



Model
PRX-1

Keypad with Proximity Reader

- Reader format: 26-bit Wiegand
- Keypad formats: 26-bit Wiegand and 8-bit burst
- Use with Viking **PRX-C**, **PRX-C-ISO**, **PRX-FOB**, **LRT-4**, certain legacy HID® proximity protocols* and certain AWID 125KHz proximity protocols**
- Comes with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating



Model
PRX-2

High Performance Proximity Reader

- Read range of up to 16 inches
- Standard 26-bit Wiegand interface
- Use with Viking **PRX-C**, **PRX-C-ISO**, **PRX-FOB**, **LRT-4**, certain legacy HID® proximity protocols* and certain AWID 125KHz proximity protocols**
- Comes with Enhanced Weather Protection (EWP)
- Surface mounts to non-metallic wall, post, or single gang electrical box



Mounts to an optional Viking gooseneck pedestal (page 34) with a **PRX-3-MK-GNP** or **PRX-3-MK-VEGNP** mounting kit (sold separately)

Model
PRX-3
PRX-3-MK-GNP
PRX-3-MK-VEGNP

Wiegand Keypad

- Slender aluminum housing for mullion mounting
- Pigtail leads
- Beeper and bi-color LED shows status
- Standard 26-bit Wiegand interface
- Dimensions: 7.1" x 1.7" x 0.5"
- Designed for outdoor use, the **PRX-4** comes standard with Enhanced Weather Protection (EWP)



Model
PRX-4

Mullion Mount Proximity Reader with Keypad

- Read range of up to 5 inches
- Reader Format: 26-bit Wiegand
- Keypad formats: 26-bit Wiegand and 8-bit burst
- Use with Viking **PRX-C**, **PRX-C-ISO**, **PRX-FOB**, **LRT-4**, certain legacy HID® proximity protocols* and certain AWID 125KHz proximity protocols**

Model
PRX-5

- Comes standard with Enhanced Weather Protection (EWP)



Proximity Cards and Fobs

- No magnetic strip to wear out
- No batteries
- **PRX-C** is credit card size with slot
- **PRX-C-ISO** is thinner and more flexible
- No minimum quantities

Model
PRX-C
PRX-C-ISO
PRX-FOB



Long Range 4 Channel Transmitter and Receiver

- Up to 400 ft range (line of sight)
- Secure, Rolling Code + Encryption, digital, anti-playback wireless transmission
- Convenient key fob design
- 4 buttons to activate up to 4 Wiegand devices
- Integrated 125KHz proximity module for close range access credential (model **LRT-4**)

Model
LRR-4
LRT-4



Proximity / Entry Controller

- 1 door with up to 250 users
- Use with a Wiegand card reader or keypad
- Standard 26-bit Wiegand interface
- Program with a touch tone phone
- Output for data logging
- Power supply included

Model
ES-1



* HID and the HID logo are registered trademarks of HID Global Corporation, an ASSA ABLOY company. All other trademarks are the property of their respective owners.
** AWID is a trademark of Applied Wireless Identification Group.

Apartment / Office Entry Controller

The **K-1900-3** converts any touch tone phone into a multi-number auto dialer that will store up to 250 telephone numbers.

When a call initiated by the **K-1900-3** is answered by an apartment or business tenant, a built-in relay contact may be activated to control an electric gate or door strike. Up to 250 keyless entry codes may also be programmed.

- Stores 250 tenant touch tone phone numbers and keyless entry codes
- DPDT relay for controlling door strikes, magnetic locks, gates, etc.
- Multi-number dialer mode (kiosks, etc.)
- Ring-thru mode for calling the entry phone
- Auxiliary relay input to trigger a timed relay activation for postal locks, etc.
- Power supply included

Model

K-1900-3

Commonly Used with:

K-1700-3
K-1705-3
K-1900-8
or any touch tone phone



No CO Line Entry Controller

Eliminates the monthly cost of a dedicated entry phone line. Allows tenants that do not have phone service to still receive calls from the entry phone. Tenants that do have phone service receive a call waiting tone generated by the **C-3000** if they are already on a call when the entry phone is activated. The tenant can "buzz" the visitor in from their touch tone phone.

- Functions with or without tenant CO lines
- Supports two entry points and 12 tenants
- Expands to 96 tenants by adding more units (each **C-3000** adds 12 additional tenants)
- Power supply included

Model

C-3000

Commonly Used with:

K-1200
K-1205
K-1700-3
K-1705-3
K-1900-8
or any touch tone phone



4 Door Entry Controller

The **C-4000** converts any four touch tone phones into multi-number auto dialers that will store up to 250 telephone numbers. When a call initiated by the **C-4000** is answered by an apartment or business tenant, a built-in relay may be activated to control an electric gate or door strike.

- Supports 4 entry points
- Supports 4 Wiegand devices
- Stores 250 tenant touch tone phone numbers and 250 entry codes
- Remote or local touch tone programmable
- Programmable relay activation code
- Programmable master entry code and maintenance personnel entry codes
- NO or NC relay contacts for controlling door strikes, magnetic locks, gates, etc.
- Power supply included

Model

C-4000

Commonly Used with:

K-1700-3
K-1705-3
K-1900-8
or any touch tone phone



Name Directories

Model	Description
D6	6 Names
D10	10 Names
D22	22 Names
D32	32 Names
D44	44 Names
D56	56 Names

Viking's vandal-resistant directories are an easily installed, high-quality line of displays, designed specifically to complement newly installed or existing secure-building entry systems.

All models feature both weather and vandal resistant construction. The **D-Series** directories are durably constructed from brushed stainless steel to match the style of Viking's stainless steel phones.



Secure Remote DTMF Controller

- Touch tone programmable
- Programmable relay activation code
- 32 programmable keyless entry codes
- Operates on any 12-24V AC/DC power source
- Postal lock input provided
- Power supply included

When a call initiated by the **SRC-1**'s entry device is answered, a built-in relay may be activated to control an electric gate or door strike. The **SRC-1** is fully user programmable and prevents unauthorized access through the entry device.

Model
SRC-1

The **SRC-1** can be used with any of Viking's analog entry phones and doorboxes.



Remote Controller for 1 Relay

- Programmable access code
- Easy installation
- Selectable relay activation times
- NO or NC relay contacts

The **RC-2A** provides remote relay operation from any standard touch tone telephone and can be installed either locally or remotely. For local installations the **RC-2A** can be installed in parallel on any analog communications path, such as analog CO lines or analog PABX/FXS stations and will passively monitor for touch tone commands.

Model
RC-2A

For off-premise applications, the **RC-2A** will answer analog CO lines or PABX/FXS stations after a selectable ring delay. Then the **RC-2A** can be activated to allow remote relay operation. Power supply included.



Remote Controller for 3 Relays

- Operational commands can be customized to 1, 2 or 3 digits in length
- Relay interrogation tones
- Programmable relay times
- Cascade up to three **RC-3** units to control up to nine relays

The **RC-3** enables a standard touch tone phone to control up to 3 maintained ON, maintained OFF, or momentary relay contacts from a remote location. The **RC-3** is fully user programmable and uses non-volatile memory.

Model
RC-3

The unit can be connected directly to a CO line or analog PABX/FXS station. Up to three units can be daisy chained on the same line to control up to nine relays. The **RC-3** features switchable 32V DC talk battery allowing easy installation on a trunk / FXO port as well. Power supply included.



Network Enabled Relay Controller

- Notification by email or text message of sensor input state change
- Can be used as a secure remote relay for Viking VoIP phones
- Ready-to-use webpage control interface
- Encrypted login
- Relay names, input names, and input status can be customized on webpage

The **RC-4A** provides networked control of four relays via an easy-to-use web interface. The same interface can be used to check the status of four contact inputs. Relays can be toggled on or off, or user-programmed timed closures can be activated. The **RC-4A** can be configured to work as a remote relay for Viking IP phones, controlling door strikes and gates when a remote relay is required for security reasons. It can also be programmed to send an email or text message in response to a change in one or more of the sensor inputs.

Model
RC-4A

Two units can be set up so that activity on a sensor input of one unit will automatically activate one of the relays on the other unit. Power supply included.



ENTRY CONTROLLERS


Single Entry Phone Interface

Allows House Phones or a Phone System to Share a Phone Line with One Viking Entry Phone

The **C-200** allows a single line telephone or a telephone system to share a phone line with a single Viking entry phone. When a visitor presses the call button on the entry phone, the resident's phone rings. The resident can then answer and converse with the visitor prior to manually allowing entry. If the resident is already on a call, the **C-200** provides a "Call Waiting" tone. The resident can then "hook flash" their phone which puts the call on hold while they converse with the visitor. Power supply included.

Model
C-200

Compatible with: All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.

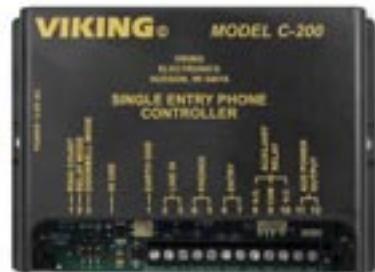

Single Entry Phone/Relay Controller with Call Forwarding

- Built in 5 number dialer (1-20 digits)
- Immediate call forward mode
- 5 Amp door strike or gate control relay
- No CO mode

The **C-250** allows single line phones or a phone system to share a phone line with a Viking entry phone. When the entry phone initiates a call, the **C-250** provides a double ring. If there is no answer, the **C-250** controller can dial up to 5 numbers to connect the entry phone call to a cell phone or guard station.

Visitors may be buzzed in with a 1 or 2 digit programmable touch tone command. The **C-250** also allows residents to monitor the entry phone and has a postal lock input. Power supply included.

Model
C-250

Compatible with: All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.



Two Entry Phone/Relay Controller with Call Forwarding

- 6 keyless entry codes per door
- Analog station mode
- Immediate call forward mode
- No CO mode
- Programmable Caller ID (to local phones only)
- Expandable to 4 controllers for up to 8 entry phones

The **C-500** allows single line phones or a phone system to share a phone line with two Viking entry phones. When the entry phone initiates a call, the **C-500** provides distinctive ring. If there is no answer, the controller can dial up to 5 numbers to connect the entry phone call to a cell phone or guard station. Visitors may be buzzed in with a 1 or 2 digit programmable touch tone command. The **C-500** allows residents to monitor either entry phone and features two trigger inputs, 5 Amp door strike or gate opener contacts, keyless entry codes, and programmable entry phone caller ID. Power supply included.

Model
C-500

Compatible with: All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.




Four Entry Phone/Relay Controller

- Analog station dial through mode for apartment or office entry applications
- Provides 6 different keyless entry codes per door and 6 master codes for use at any door
- Codes can be set as permanent or "1 time" use
- Provide 4 unique CD quality door chimes plus whole house paging when used with the Viking **SLP-4** (page 24)
- Programmable Caller ID (local phones only)
- Programmable relay activation code

Answer and open up to 4 doors or gates from your nearest phone. The **C-2000B** can provide a double ring and/or caller ID to indicate which entry phone is calling. If you are on a call, the controller provides call waiting tones and call waiting caller ID. You can place the existing call on hold, talk to the visitor, then return to the original caller. The unit can ring up to 16 phones. Programmable "Privacy Number" eliminates prank calls from the entry phones. The **C-2000B** allows the user to monitor any entry phone with auto answer capability. Power supply included.

Model
C-2000B

Compatible with: All Viking E-Series and K-Series analog entry phones or use with any standard analog phone.

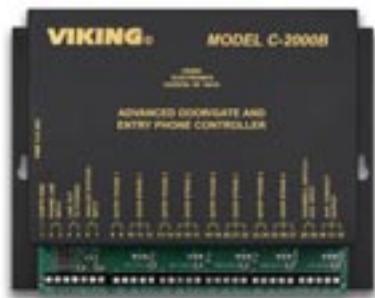

Analog Speaker Phones with Dialers

**E-30**

Standard vandal-resistant door entry phone

**E-32**

Door entry phone that mounts in a double gang box

**E-30-PT**

Door entry phone with "Push-to-Talk" button for noisy areas

**E-35**

Door entry phone with built-in analog video camera

- Telephone line powered
- Heavy-duty marine grade 316 stainless steel faceplate with brushed finish
- Faceplate dimensions: 5.0" x 5.0"
- Remotely programmable
- Selectable auto-answer feature allows remote monitoring
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Interface to a CO line, analog PABX station, or FXS port
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out

- Program to dial up to 5 numbers on busy or ring-no-answer
- Programmable maximum call length
- Operating temperature: -30°F to 150°F
- E-32 flush mounts in a standard double gang box (not included)
- Flush mount models **E-30**, **E-30-PT**, and **E-35** with the included rough-in box
- Optional surface mount boxes available (sold separately), see page 33

E-30 shown in optional VE-5x5 surface mount box

- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating



Model	Analog	EWP	Camera
E-30	●		
E-30-EWP	●	●	
E-32	●		
E-32-EWP	●	●	
E-35	●		●
E-35-EWP	●	●	●
E-30-PT	●		
E-30-PT-EWP	●	●	

Analog Speaker Phones

**E-10A**

- Telephone line powered
- Button will place or hang-up a call
- **E-10A / E-10-WHA** dimensions: 5.0" x 5.0"
- **E-20B** dimensions: 5.5" x 4.5"
- Adjustable mic and speaker volume
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time out

**E-10-WHA**

- Selectable auto-answer feature allows remote monitoring
- Programmable maximum call length
- Programmable VOX (mic/speaker) switching speed
- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating, see page 28

**E-20B**

E-10A and E-10-WHA: Heavy-duty aluminum faceplate, flush mount with the included rough-in box or use an optional surface mount box (sold separately), see page 33

E-20B: Impact resistant, UV stable, light grey plastic chassis with black UV stable pad printed graphics, surface mount only

Model	Analog	EWP
E-10A	●	
E-10A-EWP	●	●
E-10-WHA	●	
E-10-WHA-EWP	●	●
E-20B	●	
E-20B-EWP	●	●

VoIP Entry Phones

- Easy one button push operation
- 2 Amp relay contacts for door / gate control
- SIP compliant
- PoE powered (class 1, <4 Watts)
- Remotely programmable
- Automatic Noise Canceling (ANC) for proper operation in noisy environments
- Network downloadable firmware
- Polling / programming software downloads available

- Program to dial up to 5 numbers on busy or ring no answer
- Hangs up on busy, time-out, or touch tone #
- Operating temperature: -40°F to 140°F
- Programmable maximum call length
- Auto-answer for remote monitoring

- Adjustable mic and speaker volumes
- Available with Enhanced Weather Protection (EWP), designed to meet IP66 Ingress Protection Rating, see page 28
- Optional Surface Mount Boxes available (sold separately), see page 33

Model	Finish	VoIP	EWP	Camera
E-10-IP	Black	●		
E-10-IP-EWP	Black	●	●	
E-20-IP	Gray	●		
E-20-IP-EWP	Gray	●	●	
E-30-IP	Stainless	●		
E-30-IP-EWP	Stainless	●	●	
E-32-IP	Stainless	●		
E-32-IP-EWP	Stainless	●	●	
E-35-IP	Stainless	●		●
E-35-IP-EWP	Stainless	●	●	●
E-60-BK-IP	Black	●		
E-60-BK-IP-EWP	Black	●	●	
E-60-BN-IP	Bronze	●		
E-60-BN-IP-EWP	Bronze	●	●	
E-60-SS-IP	Stainless	●		
E-60-SS-IP-EWP	Stainless	●	●	
E-60-WH-IP	White	●		
E-60-WH-IP-EWP	White	●	●	



E-10-IP

Heavy-duty black aluminum faceplate, flush mount



E-20-IP

Impact resistant UV stable light gray plastic chassis, surface mount only



E-30-IP

Heavy-duty brushed 316 stainless steel faceplate, flush mount



E-32-IP

Stainless steel faceplate, flush mount in a standard double gang box



E-35-IP

Built-in analog video camera, flush mount stainless steel faceplate



E-60-SS-IP

Available finishes: black, brushed stainless, oil rubbed bronze, and white

Touch-Free VoIP Entry Phones

The **E-20TF-IP**, **E-30TF-IP** and **E-32TF-IP** Touch-Free VoIP Entry Phones are equipped with Viking's touchless motion sensor. A simple wave over the sensor will activate a call. Touch-Free calling eliminates the exposure to germs and bacteria from typical push button switches.

Model	Finish	VoIP	EWP
E-20TF-IP	Gray	●	
E-20TF-IP-EWP	Gray	●	●
E-30TF-IP	Stainless	●	
E-30TF-IP-EWP	Stainless	●	●
E-32TF-IP	Stainless	●	
E-32TF-IP-EWP	Stainless	●	●



E-20TF-IP



E-30TF-IP



E-32TF-IP

- Adjustable touch-free motion sensor
- SIP compliant
- PoE powered (class 1, <4 Watts)
- 2 Amp relay contacts for door or gate control
- Automatic Noise Canceling (ANC) for proper operation in noisy environments

- Remotely programmable
- Network downloadable firmware
- Program to dial up to 5 numbers on busy or ring no answer
- Hangs up on busy signal, time-out or touch tone command

Analog Single & Double Gang Entry Phones

Model	Finish	Analog	EWP	Camera	Proximity
E-40-BK	Black	●			
E-40-BK-EWP	Black	●	●		
E-40-BN	Bronze	●			
E-40-BN-EWP	Bronze	●	●		
E-40-SS	Stainless	●			
E-40-SS-EWP	Stainless	●	●		
E-40-WH	White	●			
E-40-WH-EWP	White	●	●		
E-50-BK	Black	●		●	
E-50-BK-EWP	Black	●	●	●	
E-50-BN	Bronze	●		●	
E-50-BN-EWP	Bronze	●	●	●	
E-50-SS	Stainless	●		●	
E-50-SS-EWP	Stainless	●	●	●	
E-50-WH	White	●		●	
E-50-WH-EWP	White	●	●	●	
E-60-BK	Black	●			
E-60-BK-EWP	Black	●	●		
E-60-BN	Bronze	●			
E-60-BN-EWP	Bronze	●	●		
E-60-SS	Stainless	●			
E-60-SS-EWP	Stainless	●	●		
E-60-WH	White	●			
E-60-WH-EWP	White	●	●		
E-65-BK	Black	●		●	
E-65-BK-EWP	Black	●	●	●	
E-65-BN	Bronze	●		●	
E-65-BN-EWP	Bronze	●	●	●	
E-65-SS	Stainless	●		●	
E-65-SS-EWP	Stainless	●	●	●	
E-65-WH	White	●		●	
E-65-WH-EWP	White	●	●	●	
E-70-BK	Black	●			●
E-70-BK-EWP	Black	●	●		●
E-70-BN	Bronze	●			●
E-70-BN-EWP	Bronze	●	●		●
E-70-SS	Stainless	●			●
E-70-SS-EWP	Stainless	●	●		●
E-70-WH	White	●			●
E-70-WH-EWP	White	●	●		●
E-75-BK	Black	●			●
E-75-BK-EWP	Black	●	●	●	●
E-75-BN	Bronze	●			●
E-75-BN-EWP	Bronze	●	●	●	●
E-75-SS	Stainless	●			●
E-75-SS-EWP	Stainless	●	●	●	●
E-75-WH	White	●			●
E-75-WH-EWP	White	●	●	●	●

- Telephone line powered
- Available in 4 different finishes
- Vandal resistant 304 stainless steel faceplate
- Interface to a CO line, analog PABX station, or FXS port
- Blue LED helps locate the push button, as well as indicate ringing and off-hook
- Intelligent call progress detection for automatic hang-up on CPC, silence, busy signal, or time-out
- Remotely programmable call length timer, silence timer, and VOX (mic /speaker) switching speed
- Adjustable mic and speaker volumes
- For applications requiring the unit to dial, add an external dialer (see page 17)
- Auto-answer feature for monitoring
- Operating temperature: -30° F to 150° F
- Enhanced Weather Protection (EWP) models available, designed to meet IP66 Ingress Protection Rating, see page 28
- Optional Surface Mount Boxes available (see pages 33-34, sold separately)
- **E-40/E-50** single gang compact size dimensions: 4.88" H x 3.13" W x 1.7" D
- **E-60/E-65/E-70/E-75** double gang compact size dimensions: 4.88" H x 4.94" W x 1.7" D

E-40 Series



- Flush mount in a standard single gang box
- Vandal resistant 304 stainless steel faceplate
- Optional **VE-3x5** surface mount box (page 34)
- Replacement faceplates available in all finishes

E-40-SS shown (Brushed Stainless Steel finish)

E-50 Series



- Built-in color composite video camera with power supply
- Audio and video transmission on one CAT 5e cable
- Flush mount in a standard single gang box
- Optional **VE-3x5** surface mount box (page 34)
- Replacement faceplates available in all finishes

E-50-BN shown (Oil Rubbed Bronze finish)

E-60 Series



- Flush mount in a standard double gang box
- Durable 304 stainless steel faceplate
- Shown in optional **VE-5x5** Surface Mount Box (page 33)
- Shown with optional **VE-LIGHT** (page 34)
- Replacement faceplates available in all finishes

E-60-SS shown in **VE-5x5** Surface Mount Box (sold separately)

E-65 Series



- Built-in color composite video camera
- Audio and video transmission on one CAT 5e cable
- Camera power supply included
- Optional Surface Mount Boxes (page 33)
- Replacement faceplates available in all finishes

E-65-BN shown (Oil Rubbed Bronze finish)

E-70 Series



- Built-in 125KHz compatible 26-bit Wiegand proximity reader
- Flush mount in a standard double gang box
- Optional Surface Mount Boxes (page 33)
- Replacement faceplates available in all finishes

E-70-WH shown (Satin White finish)

E-75 Series



- Built-in color composite video camera and 125KHz compatible 26-bit Wiegand proximity reader
- Audio and video transmission on one CAT 5e cable
- Optional Surface Mount Boxes (page 33)
- Replacement faceplates available in all finishes

E-75-BK shown (Textured Black finish)

IP Intercoms with HD Video



X-35-SS

Brushed Stainless Steel Finish



X-35-BN

Oil Rubbed Bronze Finish



X-35-BK

Textured Black Finish

The **X-35 Series** of IP Video Intercoms are a feature-rich solution designed to deliver high-definition video and dependable voice communication via SIP VoIP phone systems, cloud providers, or third party apps.

The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-35** intercoms are available with Enhanced Weather Protection (EWP), see page 28.

- Privacy-focused design - choose your own SIP and NVR solutions
- No forced cloud services or subscriptions
- SIP compliant for seamless integration
- ONVIF Profile S compliant  to ensure compatibility
- Supports H.264 and MJPEG video encoding
- Up to 1080p SIP video calling
- Separate NVR stream with audio
- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay contacts for door / gate control
- Power-over-Ethernet (class 1, <4 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

- Heavy-duty stainless steel chassis
- Flush mount in a standard double gang box (not included)
- Optional surface mount boxes available (sold separately), page 33

Model	Finish	VoIP	EWP	Camera
X-35-SS	Stainless	●		●
X-35-SS-EWP	Stainless	●	●	●
X-35-BN	Bronze	●		●
X-35-BN-EWP	Bronze	●	●	●
X-35-BK	Black	●		●
X-35-BK-EWP	Black	●	●	●

IP Emergency Phones with HD Video



X-1605

High-Visibility Red Finish



X-1605-32

Brushed Stainless Steel Finish

- Choose your own SIP and NVR solutions - no forced cloud services or subscriptions
- SIP compliant
- ONVIF Profile S 
- H.264 and MJPEG video encoding
- Separate NVR stream with audio

- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay output contacts
- PoE (class 1, <4 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

The **X-1605 Series** of IP Video Emergency Phones are designed to provide HD video and reliable handsfree voice communication for SIP VoIP phone systems, cloud providers, or third party apps. The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

The **X-1605** emergency phones dial a programmable phone number and automatically cycle through backup phone numbers in case of a busy signal or no answer. Convenient remote programming via a web-based UI, eliminating the need for a dedicated app. On-board 2 Amp relay contacts are provided for activating door strikes or gate controllers. The **X-1605** emergency phones will flash the red LED during dialing and can automatically light the LED when the call is answered.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-1605** emergency phones are available with Enhanced Weather Protection (EWP), see page 28 for more information.

Model	Finish	VoIP	EWP	Camera
X-1605	Red	●		●
X-1605-EWP	Red	●	●	●
X-1605-32	Stainless	●		●
X-1605-32-EWP	Stainless	●	●	●

Compact IP Intercoms with HD Video



X-205-SS

Brushed Stainless Steel Finish



X-205-BN

Oil Rubbed Bronze Finish



X-205-BK

Textured Black Finish

The compact and sleek **X-205 Series** offers a feature-rich solution designed to deliver high-definition video and dependable voice communication via SIP VoIP phone systems, cloud providers, or third party apps.

The built-in IP video camera supports both H.264 and MJPEG video compression via RTSP, offering low-light sensitivity, a wide 126-degree viewing angle, and the capability to output both call and NVR video streams simultaneously at up to 1080p resolution.

This versatile intercom system supports programmable number dialing and automatically cycles through backup phone numbers in case of a busy signal or no answer. Remote configuration via a user-friendly built-in Web UI, eliminating the need for a dedicated app.

For outdoor installations where the unit is exposed to precipitation or condensation, the **X-205** intercoms are available with Enhanced Weather Protection (EWP), see page 28 for more information.

- Attractive low-profile stainless steel chassis
- Privacy-focused design - choose your own SIP and NVR solutions
- No forced cloud services or subscriptions
- SIP compliant for seamless integration
- ONVIF Profile S compliant  to ensure compatibility
- Supports H.264 and MJPEG video encoding
- Up to 1080p SIP video calling
- Separate NVR stream with audio
- Selectable video resolutions
- Program remotely via Web UI
- 2 Amp relay contacts for door / gate control
- PoE powered (class 1, <4 Watts)
- Network downloadable firmware
- Cycles through backup phone numbers on busy or no-answer

- Surface mount to a standard single gang electrical box (not included), or mount directly to a wall or flat sided post
- Optional **X-205-MMK** mullion mounting kit to mount to the left side of a vertical mullion

Model	Finish	VoIP	EWP	Camera
X-205-SS	Stainless	●		●
X-205-SS-EWP	Stainless	●	●	●
X-205-BN	Bronze	●		●
X-205-BN-EWP	Bronze	●	●	●
X-205-BK	Black	●		●
X-205-BK-EWP	Black	●	●	●

IP Intercom Secure SIP and Web UI

The **E-32T Series** of IP Intercoms are designed to provide reliable and secure voice communication for SIP VoIP phone systems, cloud providers, or third party apps. SIP transport over TLS to provide a higher level of security and compatibility with SIP providers. The built-in Web User Interface allows for programming and configuration from any operating system with a web browser.

The **E-32T Series** intercoms dial a programmable phone number and automatically cycle through backup phone numbers in case of a busy signal or no answer.

Model	Finish	VoIP	EWP
E-32T-SS-IP	Stainless	●	
E-32T-SS-IP-EWP	Stainless	●	●



E-32T-SS-IP

Brushed Stainless Steel Finish

This is just the beginning...

- » New models
- » Added features
- » Different designs
- » Expanded applications
- » More options!

Be FIRST to learn
WHAT'S NEW with
the X-SERIES >>



VIKING

VIKING ELECTRONICS, INC.
1531 INDUSTRIAL STREET
HUDSON, WI 54016-9386

ADDRESS SERVICE REQUESTED

WHERE TO BUY

ADI
800.233.6261 | adiglobaldistribution.us

ALARM PRODUCTS DISTRIBUTORS
800.783.1552 | apdlink.com

BOETTCHER SUPPLY
800.657.5770 | boettchersupply.com

GOLDCOM
800.788.8848 | goldcom.us

GRAYBAR
800.472.9227 | graybar.com

HALL TELECOMMUNICATIONS
800.265.2667 | halltel.com

HB DISTRIBUTORS
818.882.0000

HIGH-TECH COMMUNICATIONS
800.256.3010 | high-techcomm.com

JENNE
800.422.6191 | jenne.com

KGPCO
800.328.5142 | kgpco.com

LONE STAR SYSTEMS SUPPLY
210.888.5522 | lonestar-us.com

POWER & TEL
800.238.7514 | ptsupply.com

REXEL
888.739.3577 | rexelusa.com

TARGET DISTRIBUTING
800.873.5528 | targetd.com

TELEDYNAMICS
800.847.5629 | teledynamics.com

VOIP SUPPLY
800.398.8647 | voipsupply.com

WALKER & ASSOCIATES, INC.
800.925.5371 | walkerfirst.com

WESCO / ANIXTER
800.323.8167 | anixter.com

888 VOIP
888.864.7786 | 888voip.com

NEED HELP?
WE'RE HERE!



VIKING ELECTRONICS, INC.
Call: 715.386.8861
vikingelectronics.com
info@vikingelectronics.com

TO PURCHASE OUTSIDE THE USA/CANADA:

VIKING INTERNATIONAL +1.715.386.3794
vikinginternational@vikingelectronics.com

