


Control a Second Door/Gate from a Single C-2000B Entry Phone

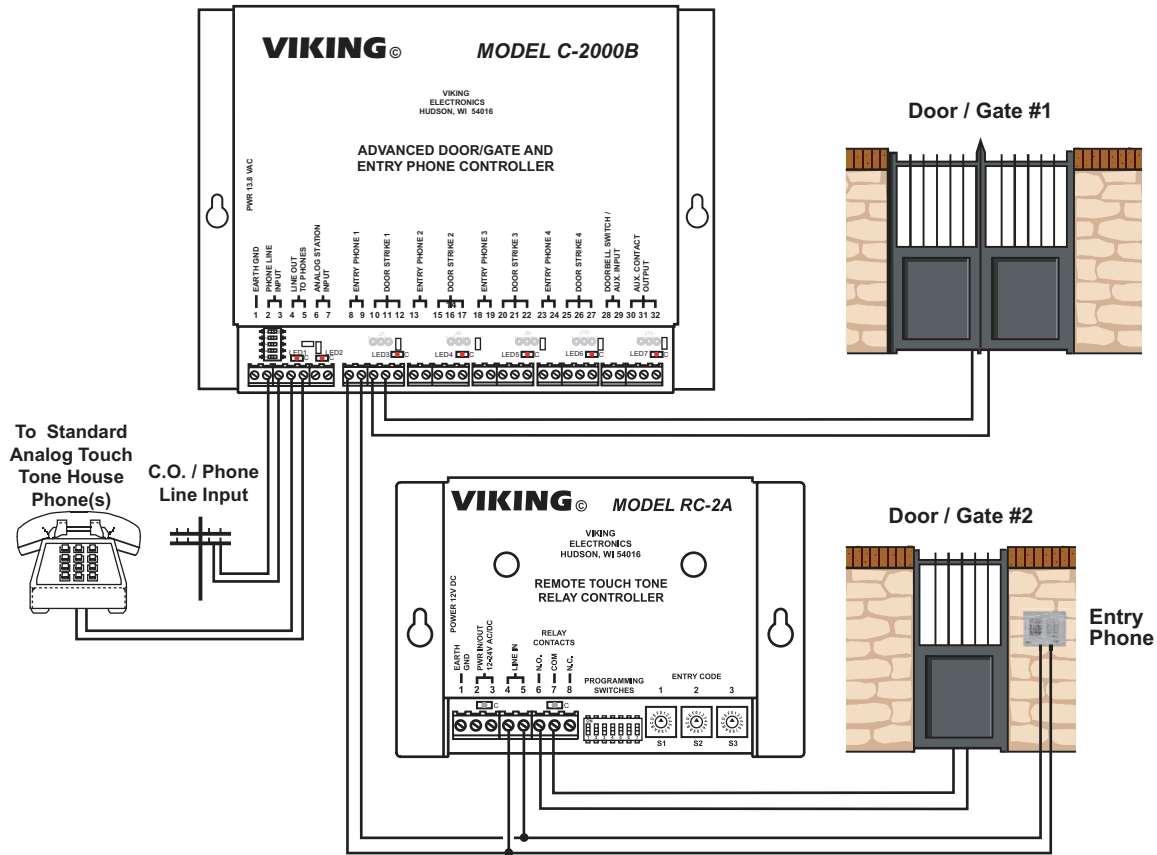

The C-2000B allows an entry phone to control one doorstrike relay, so a second entry phone is normally required to control two doors or gates. A Viking RC-2A can be added to allow a single entry phone to control a second door or gate. The keyless entry of the C-2000B operates the first door and the code set in the RC-2A operates the second.

This combination is also used when the users want to stay connected to the entry phone after the relay has been activated (the C-2000B disconnects the house phones from the entry phone after relay activation). The house phones remain connected to the entry phone if the command set in the RC-2A does not contain a "*" or "#".